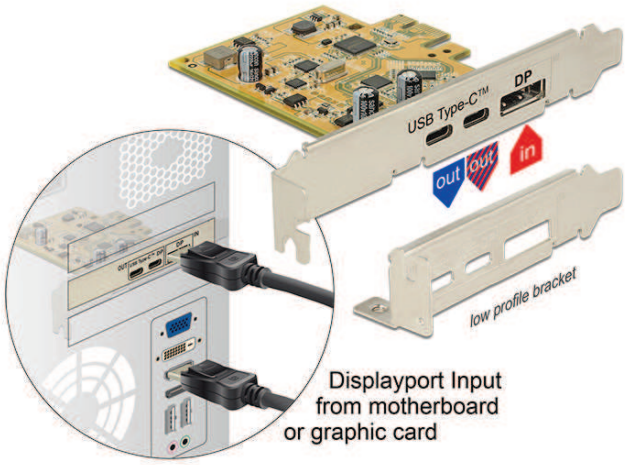
Item No. 89582

Delock PCI Express Card > 1 x external USB Type-C™ 3.1 female + 1 x external USB Type-C™ 3.1 (DP Alt Mode) female

Description

This PCI Express card by Delock expands the PC by two external USB-C™ ports. Different USB-C™ devices, such as docking stations, card readers, external housings etc., can be connected to the card. By using the included cable, the Displayport connector of the PCI Express card can be connected to a Displayport output of a graphics card on the motherboard. Therefore one USB-C™ port will be DP Alt Mode capable. A monitor can be connected to this port in order to transmit video and audio signals.



Specification

- Connectors:
  external:
  1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female
  1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female (DP Alt Mode capable)
  1 x Displayport 20 pin female (for DP Alt Mode function)
  internal:
  1 x PCI Express x1, V3.0
- Chipset: Asmedia ASM1142
- Data transfer rate up to:
  SuperSpeed USB 10 Gbps,
  SuperSpeed USB 5 Gbps,
  Hi-Speed 480 Mbps,
  Full-Speed 12 Mbps,
  Low-Speed 1.5 Mbps
- Displayport 1.2 specification
- Resolution up to 3840 x 2160 @ 60 Hz (depending on the system and the connected hardware)
- Power supply via PCI Express interface
- Electrical power per port: max. 7.5 watt (5 V / 1.5 A)
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 4.4.x
- PC with one free PCI Express slot
- Graphics card with Displayport output (to support DP Alt Mode)

Package content

- PCI Express card
- Displayport cable
- Low profile bracket
- Driver CD
- User manual

Additional Information



EAN: 4043619895823




Country of origin: China

Package: Retail Box

© 2017 by Delock. All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.

Images


© 2017 by Delock. All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.

General	
Specification:	eXtensible Host Controller Interface (xHCI) 1.1
	Displayport 1.2
Supported operating system:	Linux ex Kernel 4.4.x
	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit
Interface	
External:	2 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female
	1 x Displayport 20 pin female (for DP Alt Mode function)
Internal:	1 x PCI Express x1, V3.0
Technical characteristics	
Chipset:	Asmedia ASM1142
Data transfer rate:	SuperSpeed USB 10 Gbps

© 2017 by Delock. All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.