Delock Riser Card PCI Express x1 to 1 x PCI 32 Bit Slot with 60 cm cable

Description

The PCI Express riser card by Delock enables the connection of one **PCI card** via one PCI Express interface. The flexible cable allows a space-saving installation inside the computer case.



Note

The package content includes a USB 3.0 riser cable with a length of 60 cm. No USB signals are transmitted through this cable, therefore it is not possible to exchange it with a different or longer cable.

Specification

- Connectors:
  Motherboard side:
  1 x PCI Express x1
  1 x SuperSpeed USB (USB 3.2 Gen 1) Type-A female
  Riser side:
  1 x 32-Bit PCI
  1 x SuperSpeed USB (USB 3.2 Gen 1) Type-A female
  1 x SATA power connector
- Chipset: Asmedia ASM1083
- Bootable
- 1 x jumper for 5 V or 3.3 V setting
- 4 x mounting holes on the riser card
- Cable data:
  1 x riser cable USB 3.0 Type-A male to male ca. 60 cm (incl. connectors)
  1 x power cable 4 pin to SATA ca. 20 cm (incl. connectors)

System requirements

- Linux Kernel 5.4 or above
- Windows 8.1/8.1-64/10/10-64
- Windows Server 2019
- PC with one free PCI Express slot

Package content

- PCIe to USB riser card
- USB to PCI riser card
- USB cable
- Power cable
- User manual

Item no. 90065


EAN: 4043619900657

Country of origin: China

Package: Box

© 2022 by Delock. All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.

Images

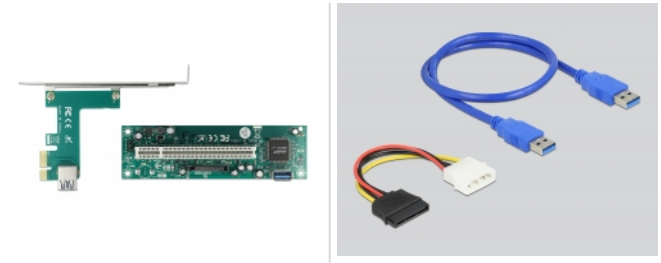

General	
Function:	bootable
Supported operating system:	Linux Kernel 5.4 or above
	Windows 10 32-bit
	Windows 10 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows Server 2019
Interface	
Connector 1:	1 x PCI Express x1
Connector 2:	1 x 32-Bit PCI
connector 3:	1 x SATA 15 pin power connector
Technical characteristics	
Chipset:	Asmedia ASM1083

© 2022 by Delock. All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.