SUPER-COLOR

Art. 74 / 9 / 0224

Paint spray



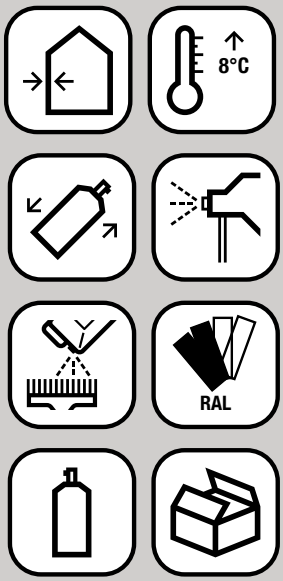

Properties
Quick-drying, well-covering and extremely economical quality paint with rust inhibitors for exterior and interior use. Produces resistant and excellently adherent paint surfaces for a wide range of applications.

Pretreatment
Remove grease, dirt and rust. If necessary, apply an anti-rust primer (SUPER-PRIMER primer spray, ACRYL-PRIMER universal primer spray). Carefully cover areas not to be sprayed.

Processing
Avoid sun and wind. Shake the can before use until the mixing balls move audibly for about 20 seconds. Shake well even when working in between. Spray distance 25–30cm. Spray thin layers in the cloister. Wait a few minutes after each shift, but no longer than 30 minutes.

Drying
- Dust dry after 20–30 minutes
- Firm to the touch after approx. 1 hour
- Fully dried after about 6 hours

Extensiveness
1–2 m², depending on the colour shade, the quantity applied and the condition of the substrate.

Cleaning
With self-cleaning special valve. It is no longer necessary to reverse the can after use to clean the valve by means of gas leakage.

Delivery form
Aerosol cans of 400ml.

Shelf life
SUPER-COLOR can be stored for at least 24 months in the well closed original container. Storage beyond this specified period does not necessarily mean that the goods are unusable. However, for quality assurance reasons, it is essential to check the required property values.

Gloss level
Gloss (80–85 % at 60° angle), silk gloss and matt

Colours
28 standard RAL colours according to Knuchel-RAL colour chart.

Registration
CPID 224399

Classification
For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.

Note
This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if other products are used in the paint build-up system.
Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.

Knuchel Farben
High quality – Top finish

Knuchel Farben LTD Paints and Varnishes
Steinackerweg 13 **CH-4537 Wiedlisbach**
Tel. +41 32 636 50 40
Fax +41 32 636 50 45
info@knuchel.ch
www.knuchel.ch