WIRING DIAGRAMS

22 JANUARY 2024







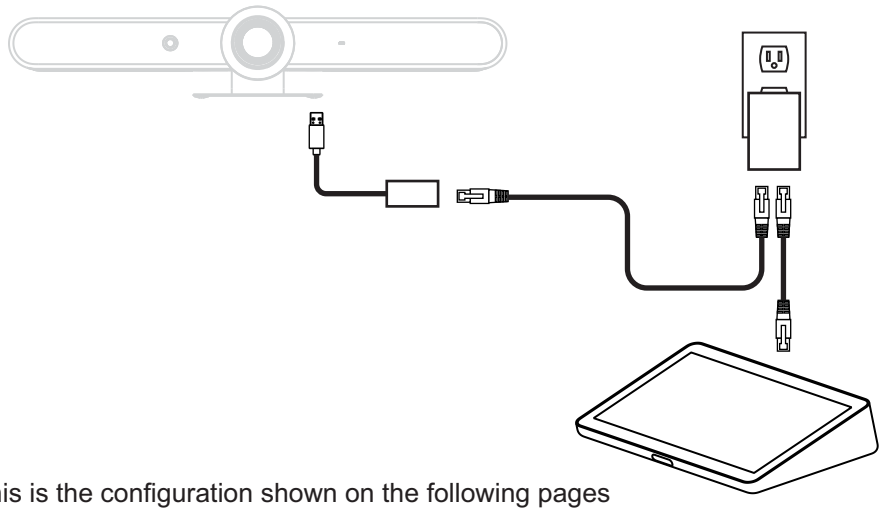


TABLE OF CONTENTS

Mic Pod CAT Coupler	4
Rally Bar/Rally Bar Mini Appliance Mode	6
Rally Bar/Rally Bar Mini BYOD Mode	14
Rally Bar/Rally Bar Mini USB Mode	19
Rally Bar, Mini, Huddle and RoomMate with Touch Screens	25
Rally/Rally Plus	30
SWYTCH	35
RoomMate	45
Scribe	53
Sight	57
Rally Bar Huddle Appliance Mode	70
Rally Bar Huddle BYOD Mode	73
Rally Bar Huddle in USB Mode	75


Wiring configurations for Tap and Tap IP: The wiring diagrams on the following pages are shown with Tap but most configurations can be substituted with Tap IP using one of the below connection methods.

Tap
USB connection*




*This is the configuration shown on the following pages


Tap IP
LAN + PoE injector (available for purchase seperately)

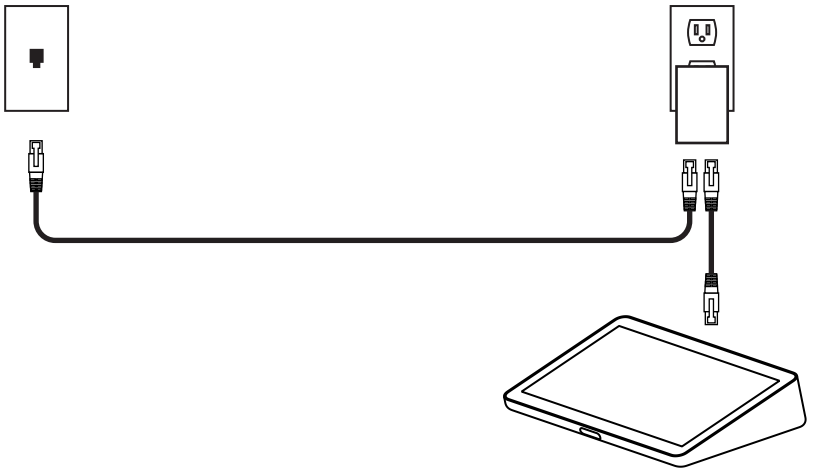


Tap IP
PoE enabled network

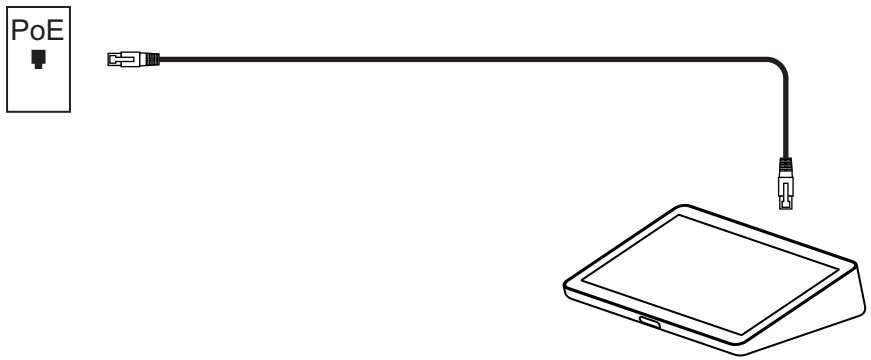


Tap IP
WLAN + PoE injector (available for purchase seperately)

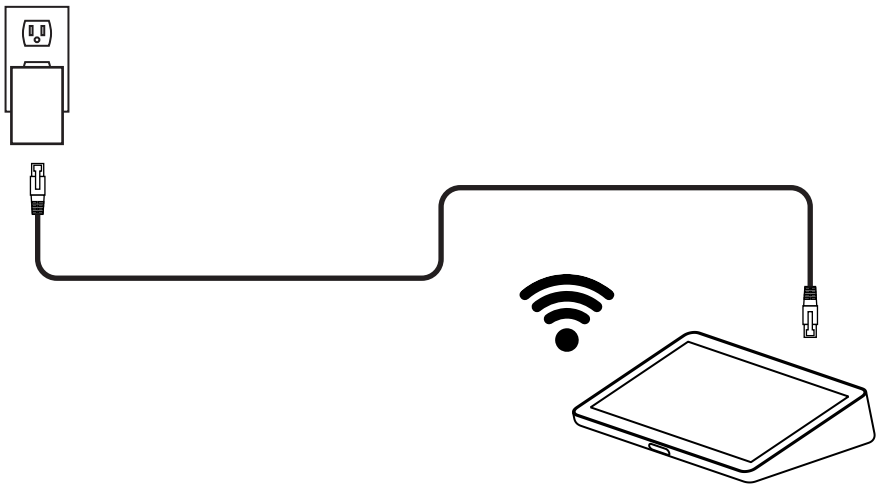


Rally Bar

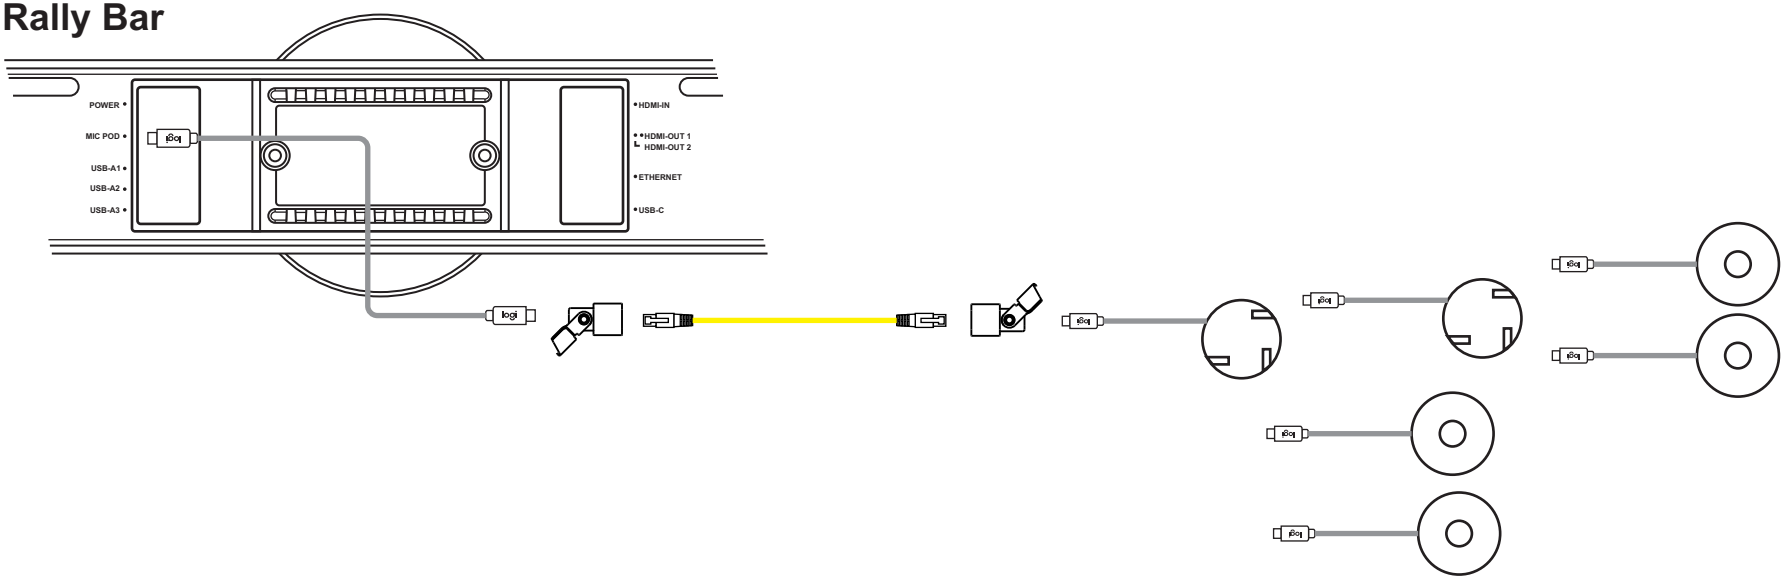

Rally Bar Mini

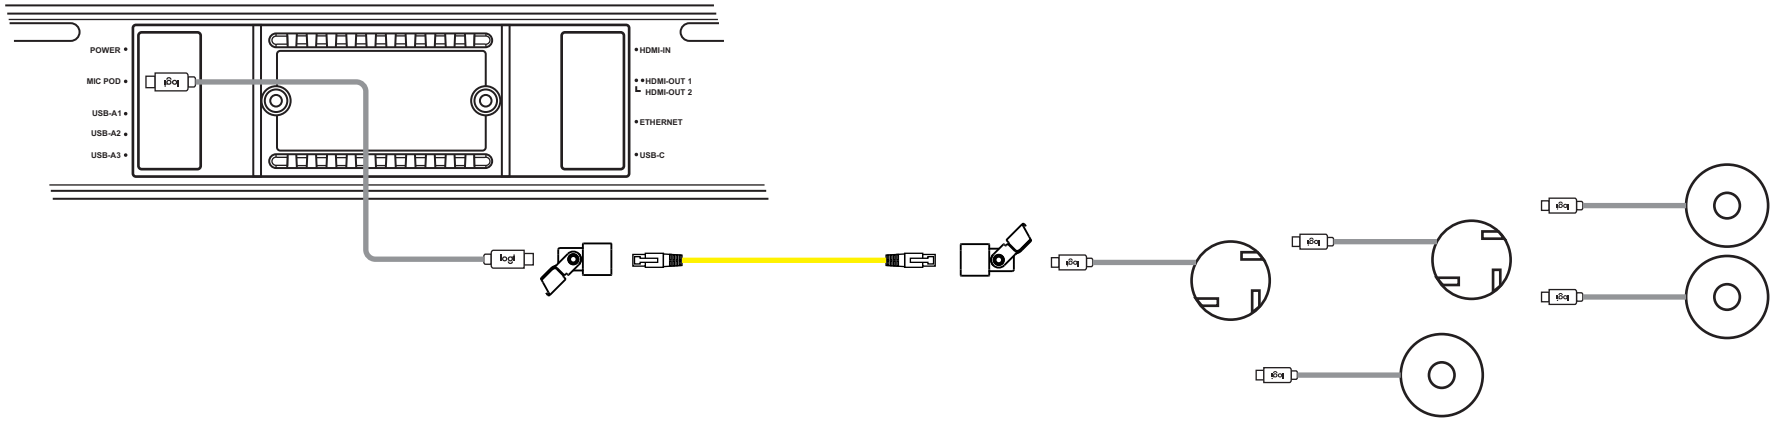


CAT cable ≤ 20m

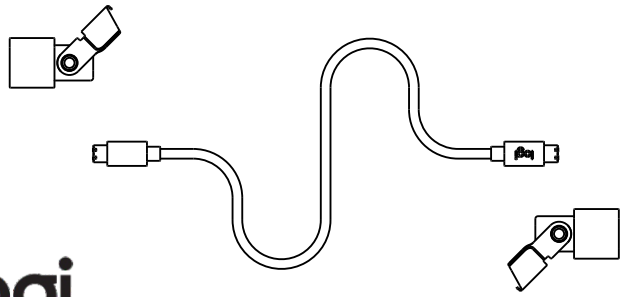



Mic Pod CAT Coupler
Rally Bar / Rally Bar Mini

Supported Configurations

[Online Manual]

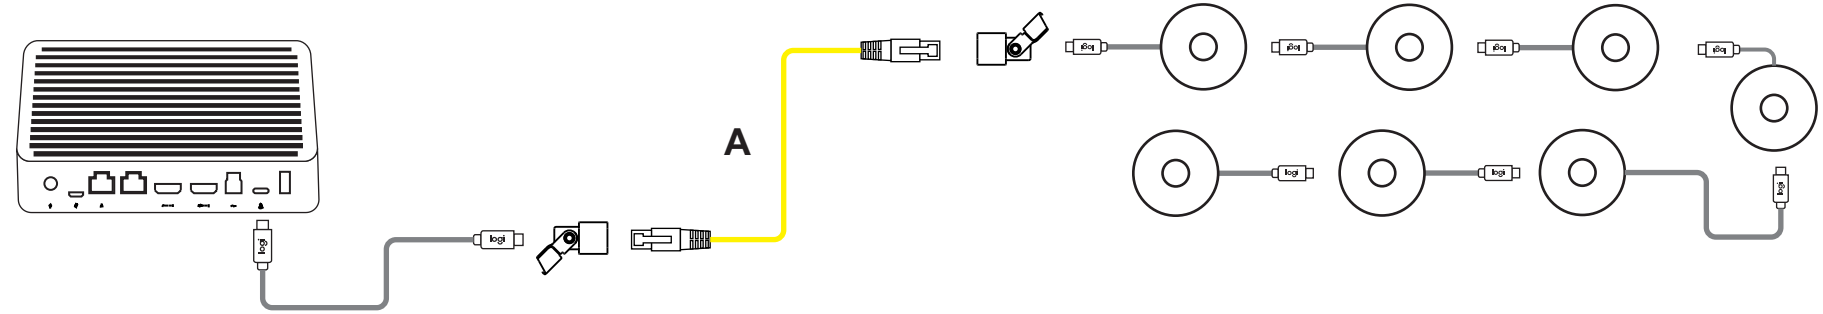

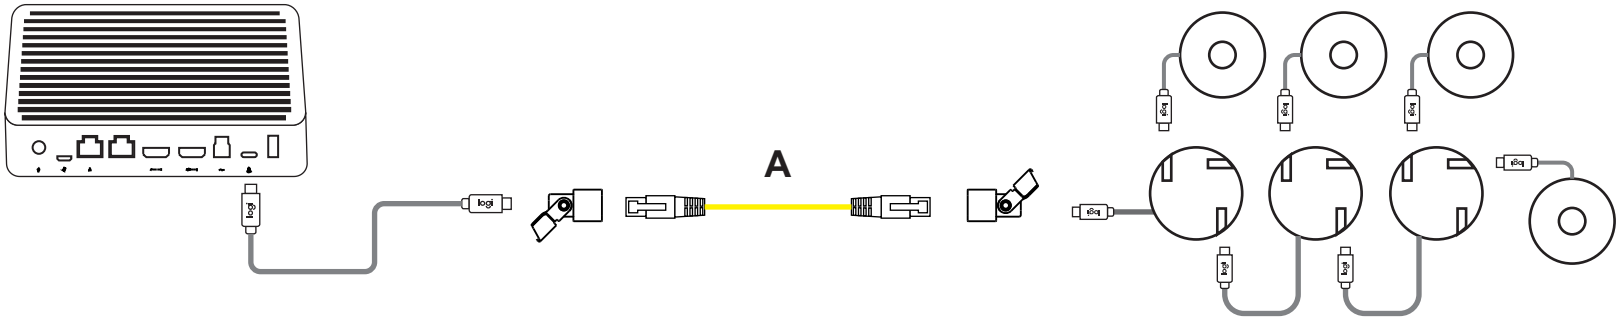

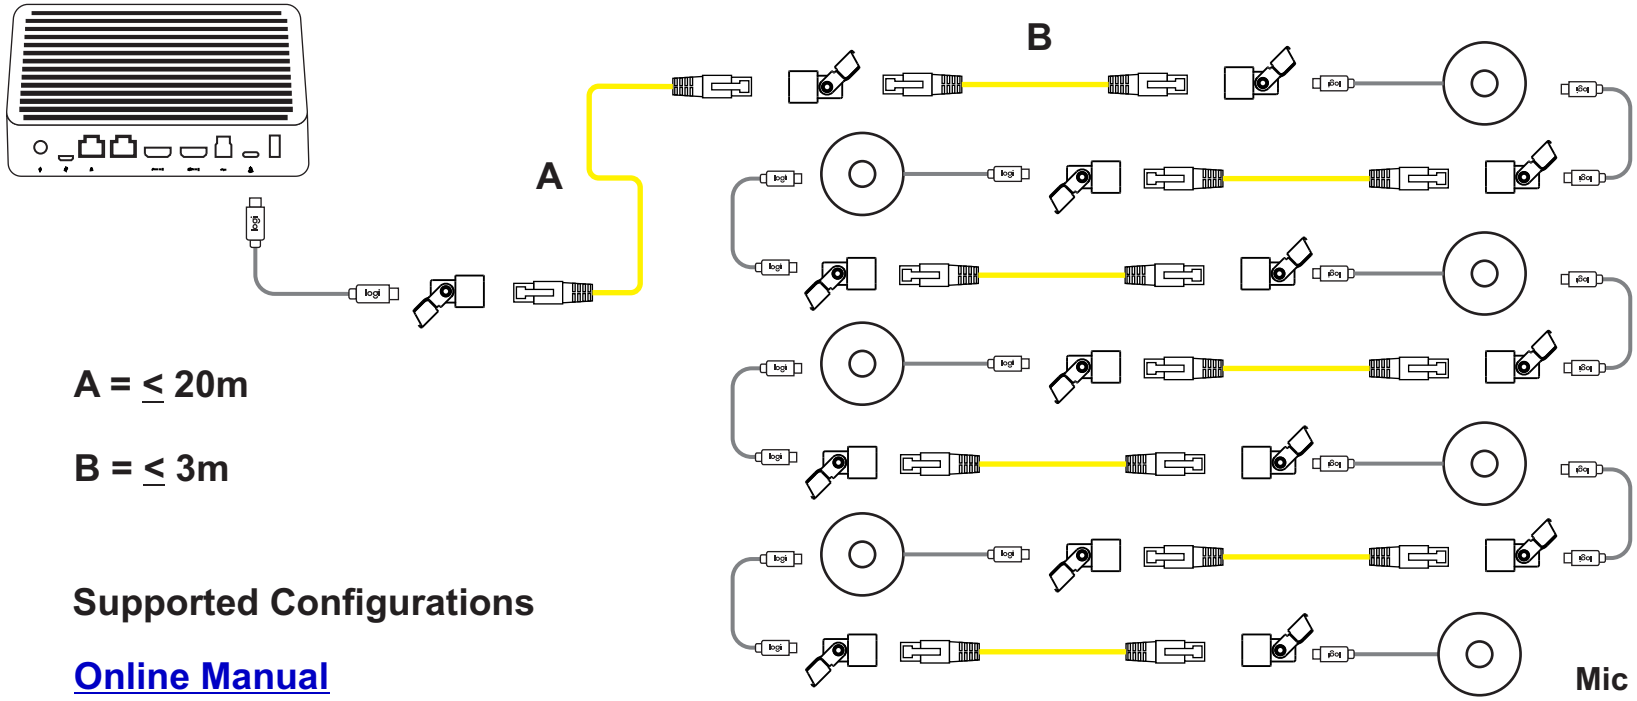

A = ≤ 20m

B = ≤ 3m


Supported Configurations

Online Manual

Mic Pod CAT Coupler
Rally / Rally Plus
Maximum 7 Mic Pods and/or Mic Pod Hubs


RALLY BAR & RALLY BAR MINI IN APPLIANCE MODE

Table of Contents

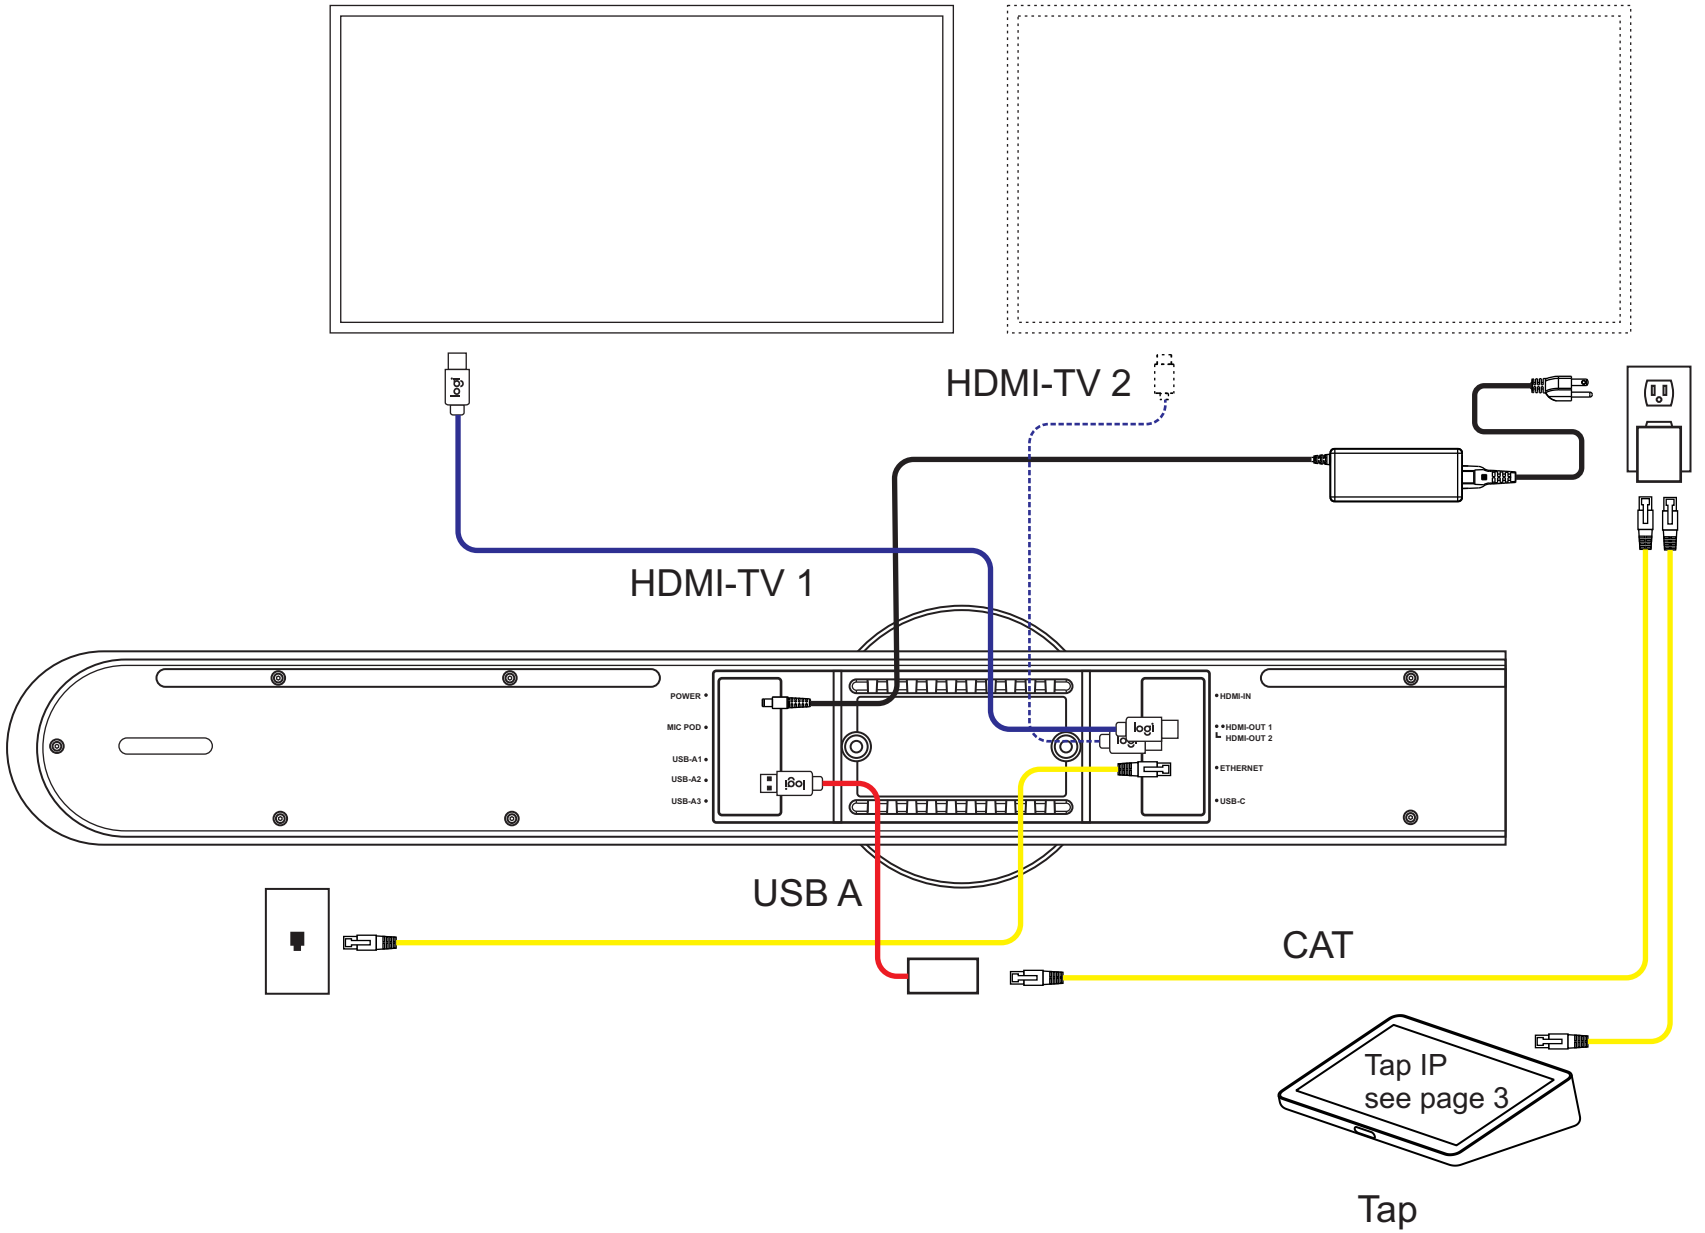


CAT
USB
HDMI

Rally Bar / Rally Bar Mini
Appliance Mode: Default configuration

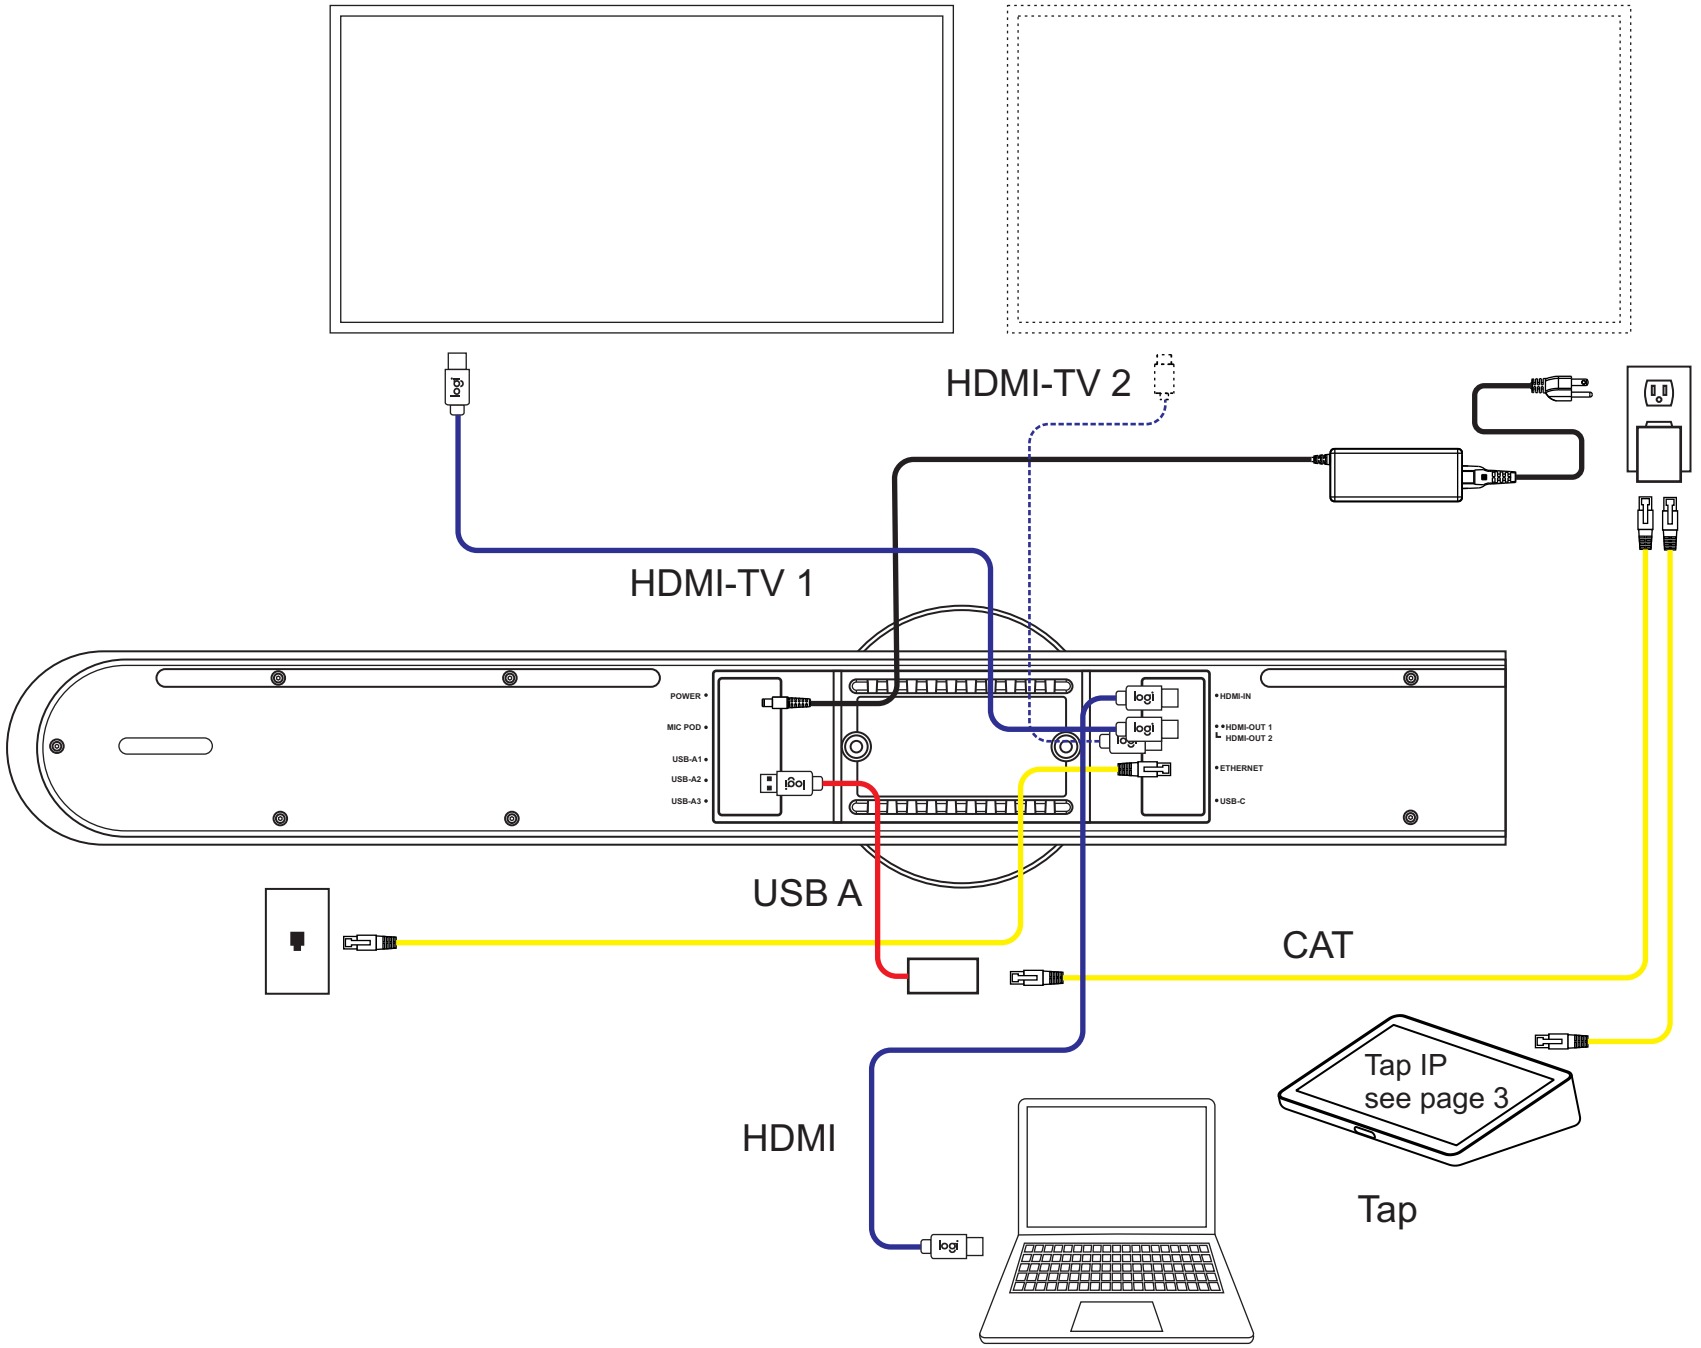


CAT
USB
HDMI

Rally Bar / Rally Bar Mini
Appliance Mode: Wired screen share (VC application dependent)

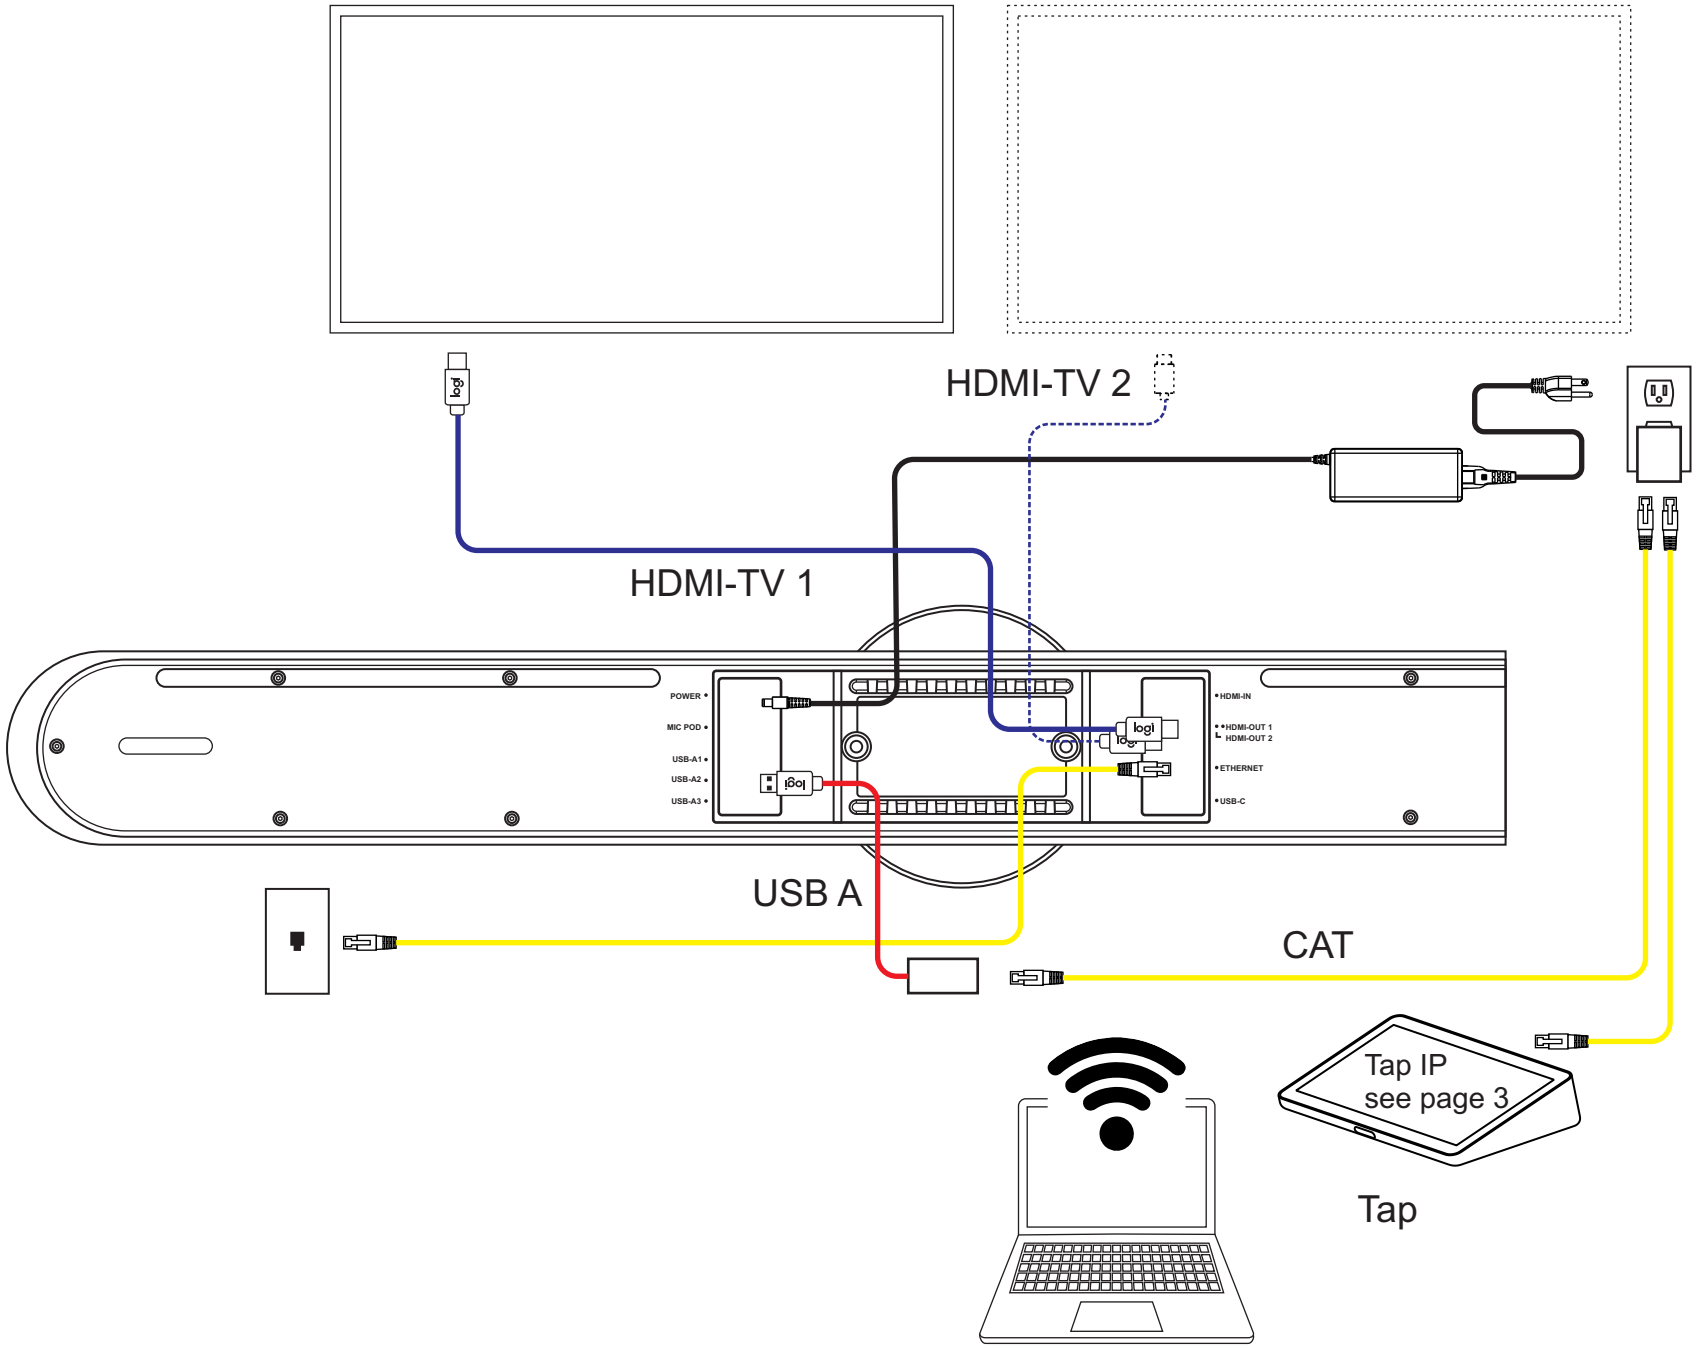


CAT
USB
HDMI

Rally Bar / Rally Bar Mini
Appliance Mode: Wireless screen share through VC application

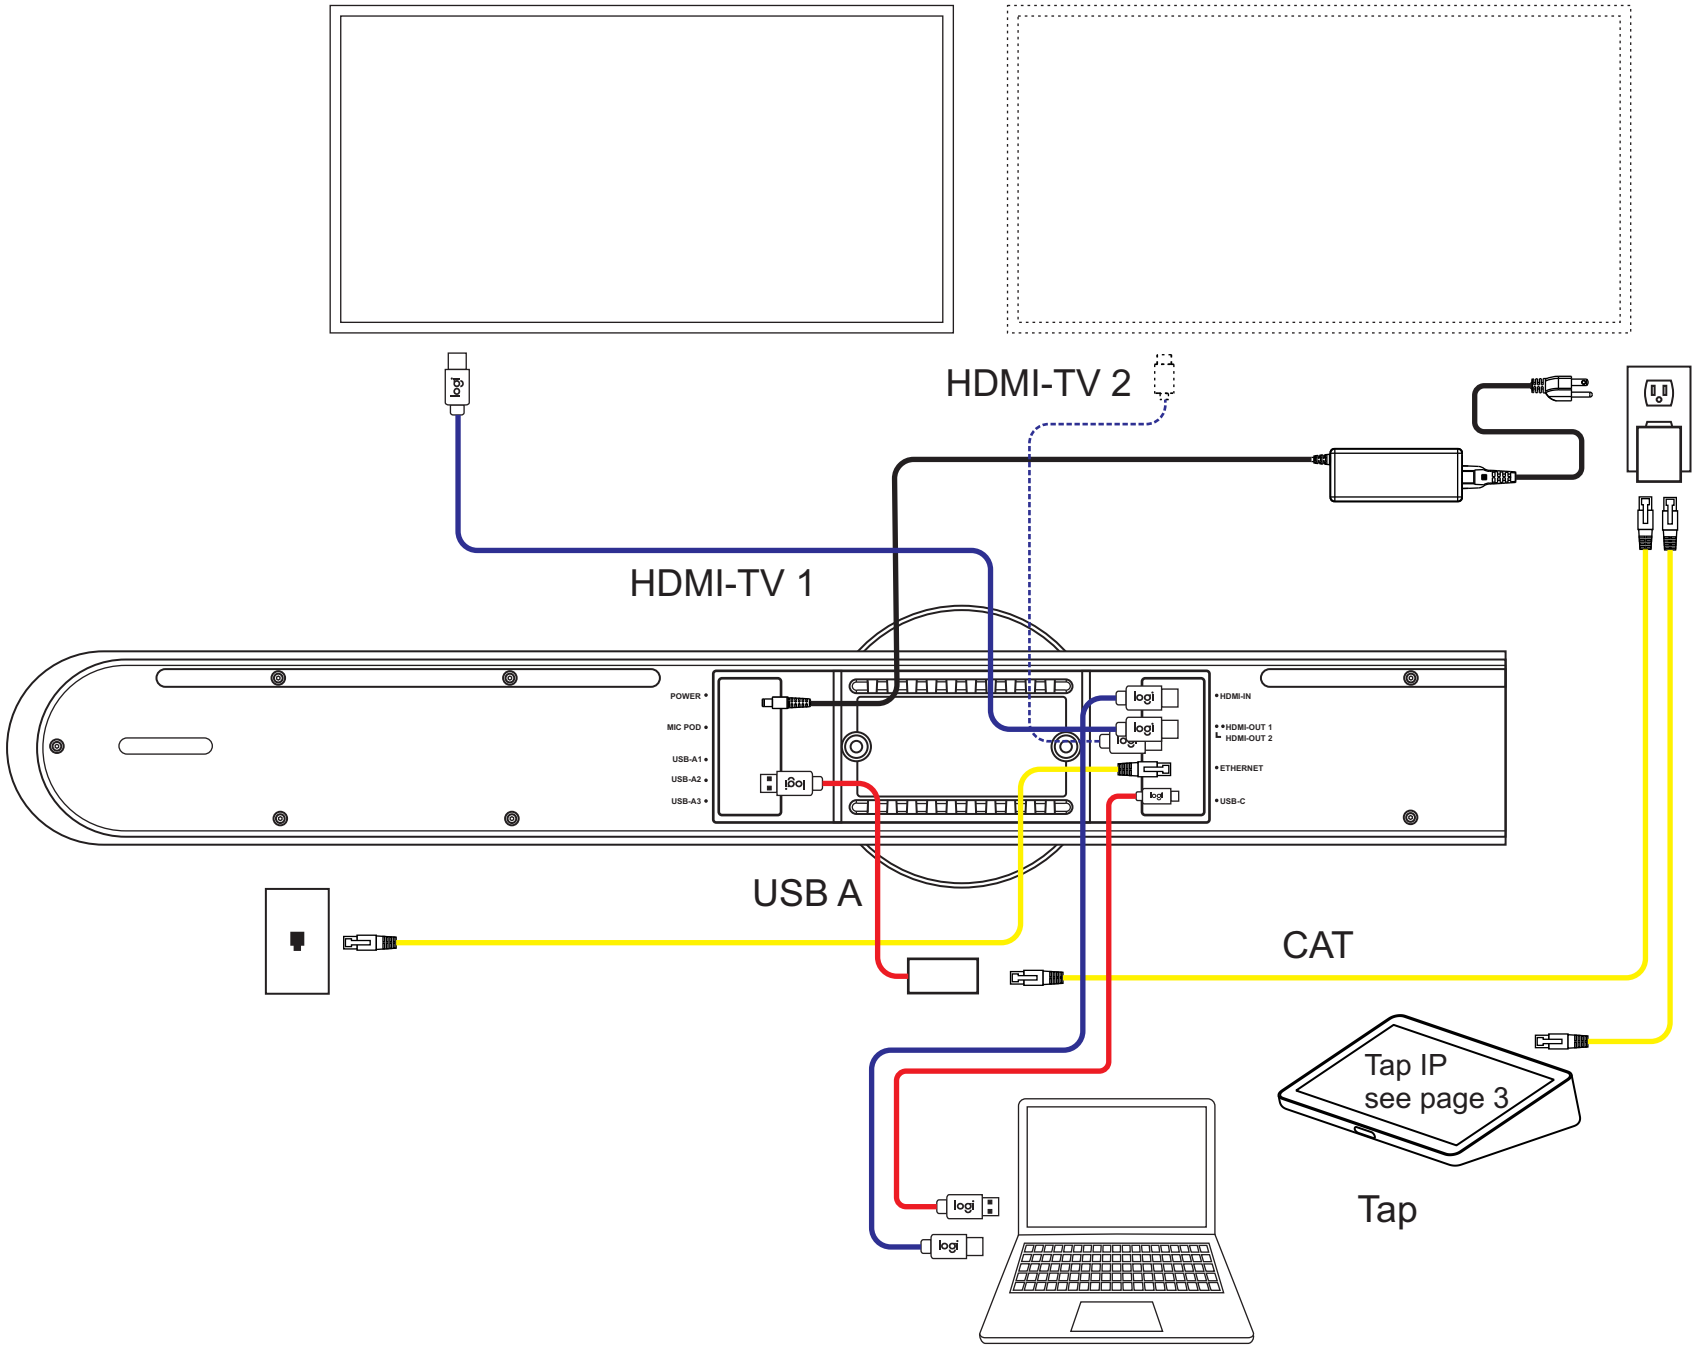


CAT
USB
HDMI

Rally Bar / Rally Bar Mini
Appliance Mode: Temporary switch to USB mode

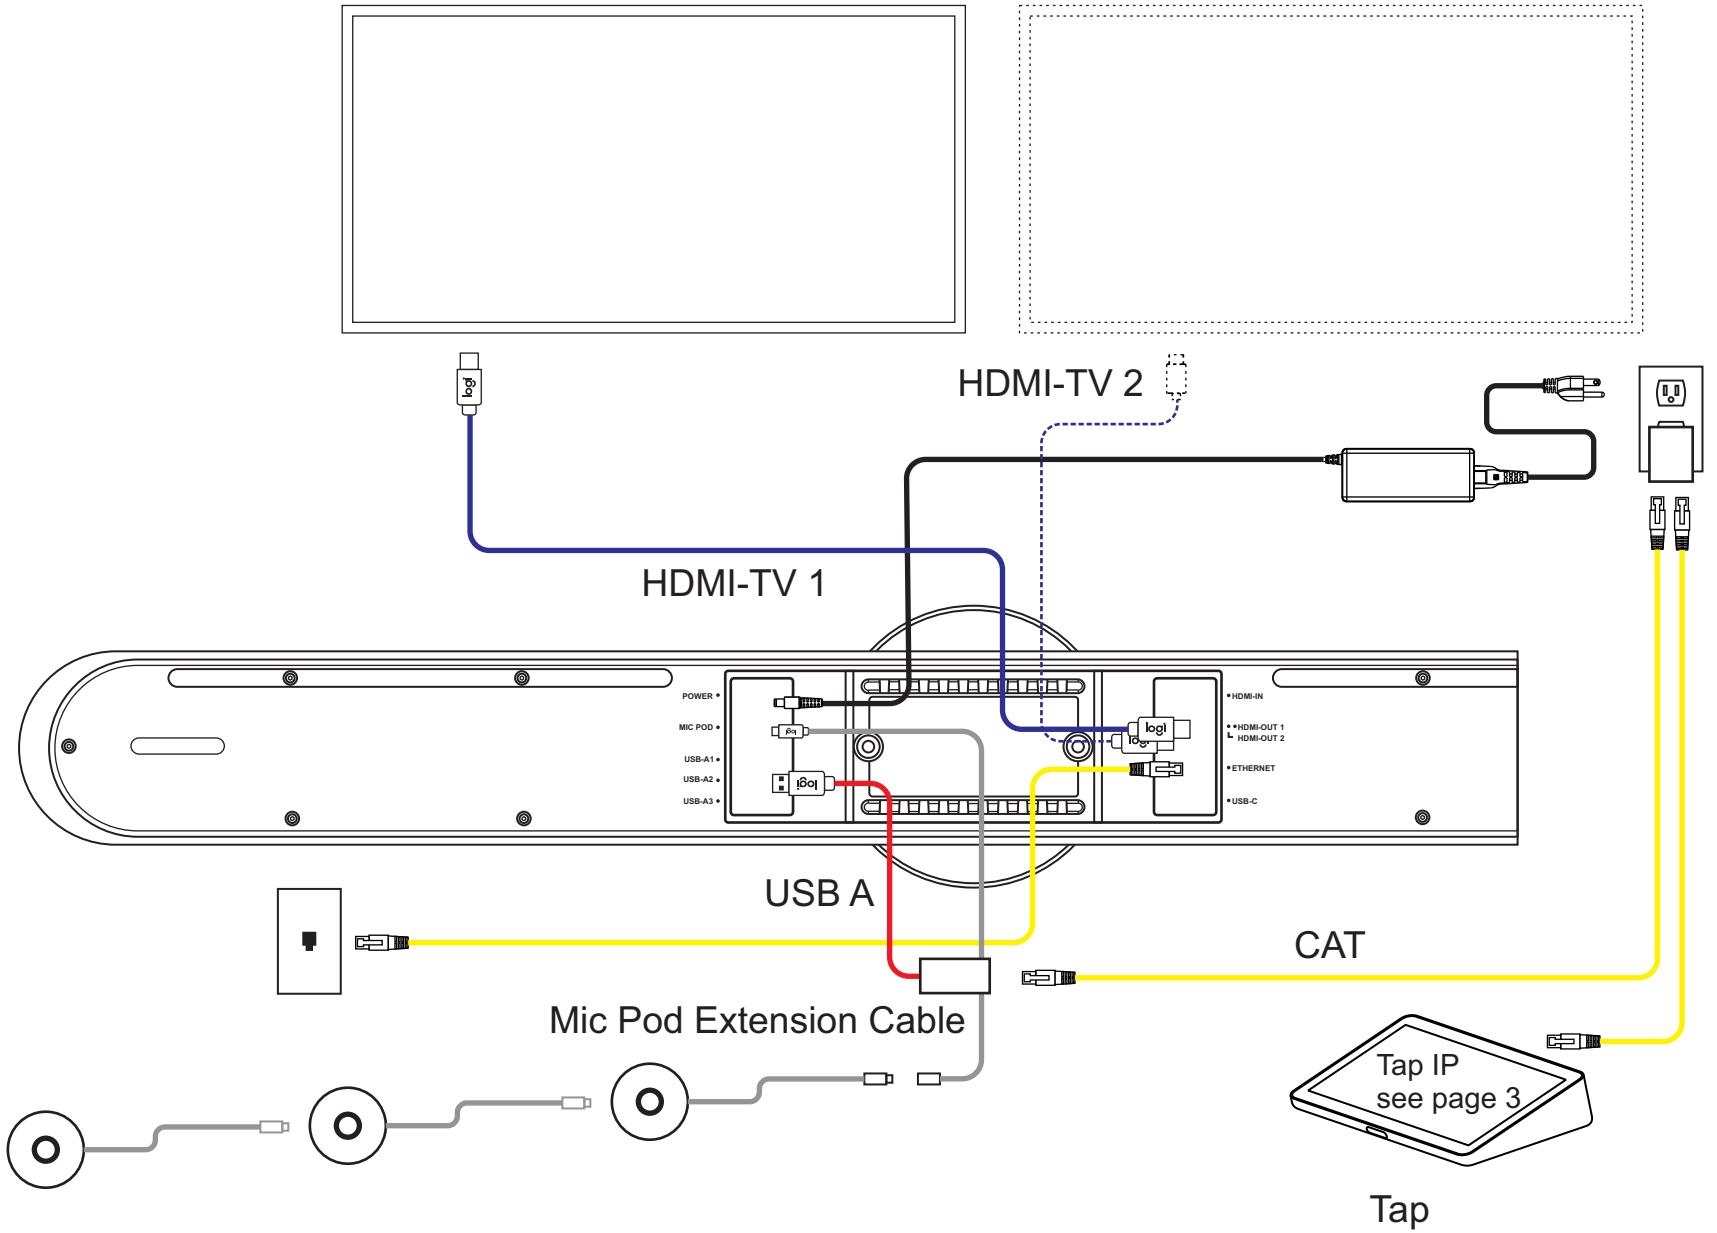


CAT
USB
HDMI
MIC

Rally Bar / Rally Bar Mini
Appliance Mode
Rally Bar max 4 Mic Pods; Rally Bar Mini max 3 Mic Pods

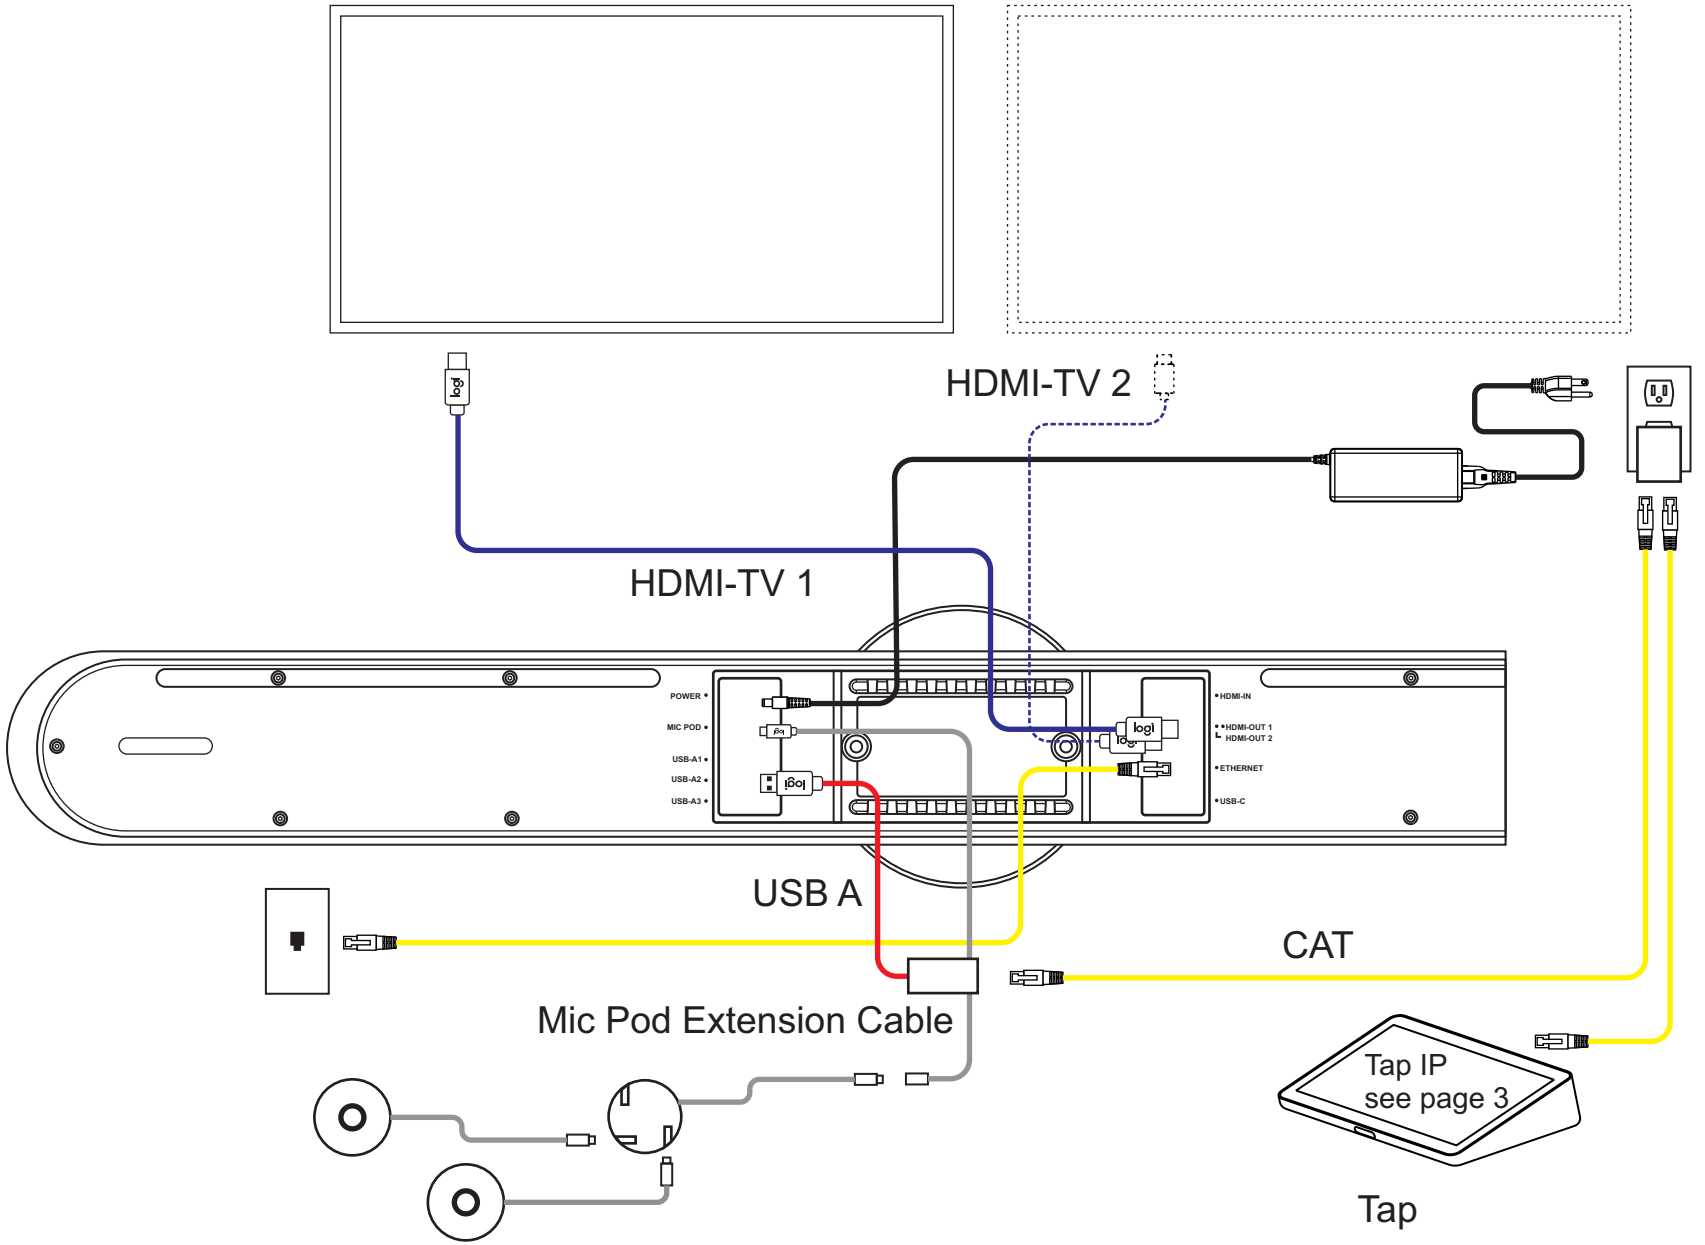

CAT
USB
HDMI
MIC

Rally Bar / Rally Bar Mini
Appliance Mode:
Rally Bar max 4 Mic Pods + 2 Mic Pod Hubs /Rally Bar Mini max 3 Mic Pods + 2 Mic Pod Hubs

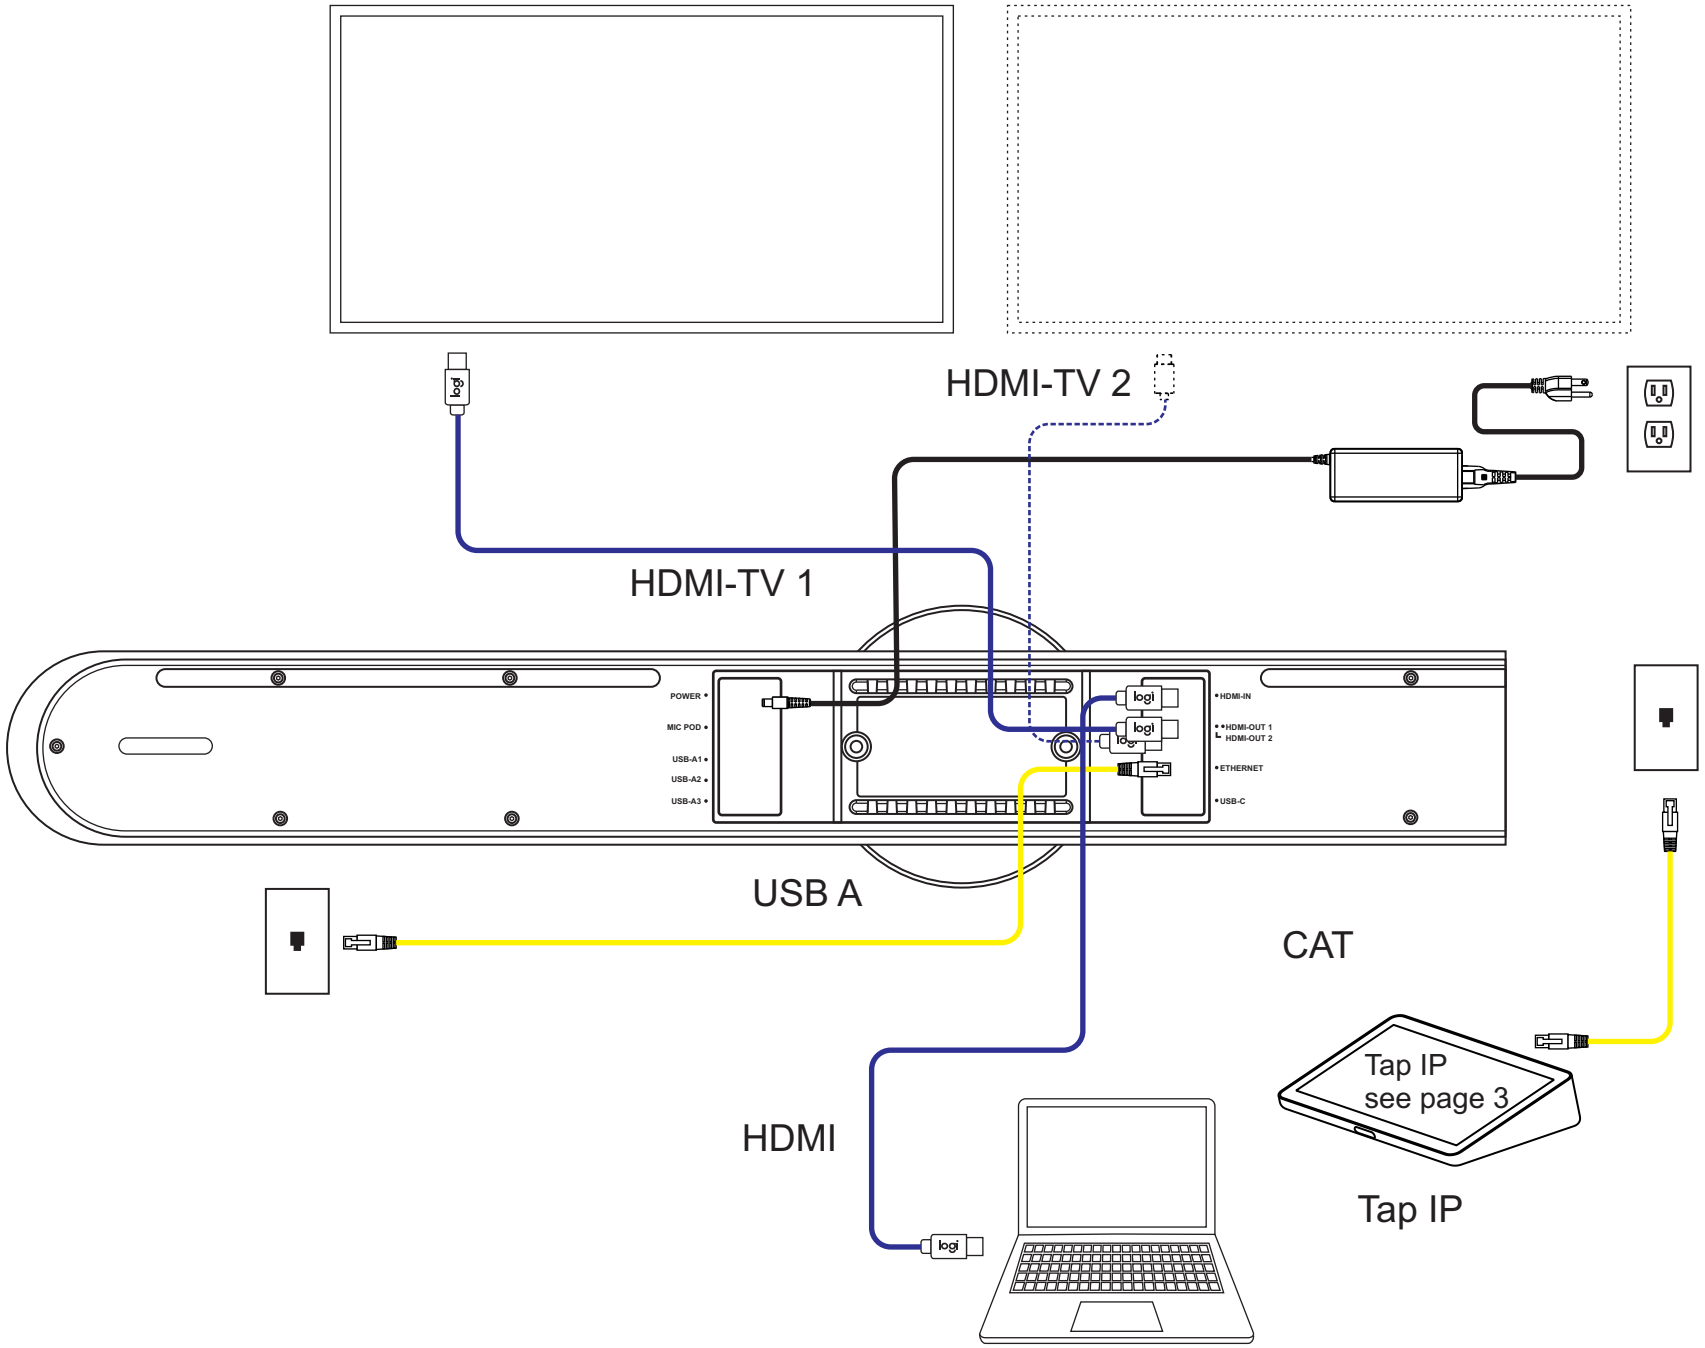


CAT
USB
HDMI

Rally Bar / Rally Bar Mini
Appliance Mode: Wired screen share (VC application dependent)


RALLY BAR & RALLY BAR MINI IN BYOD MODE

Table of Contents

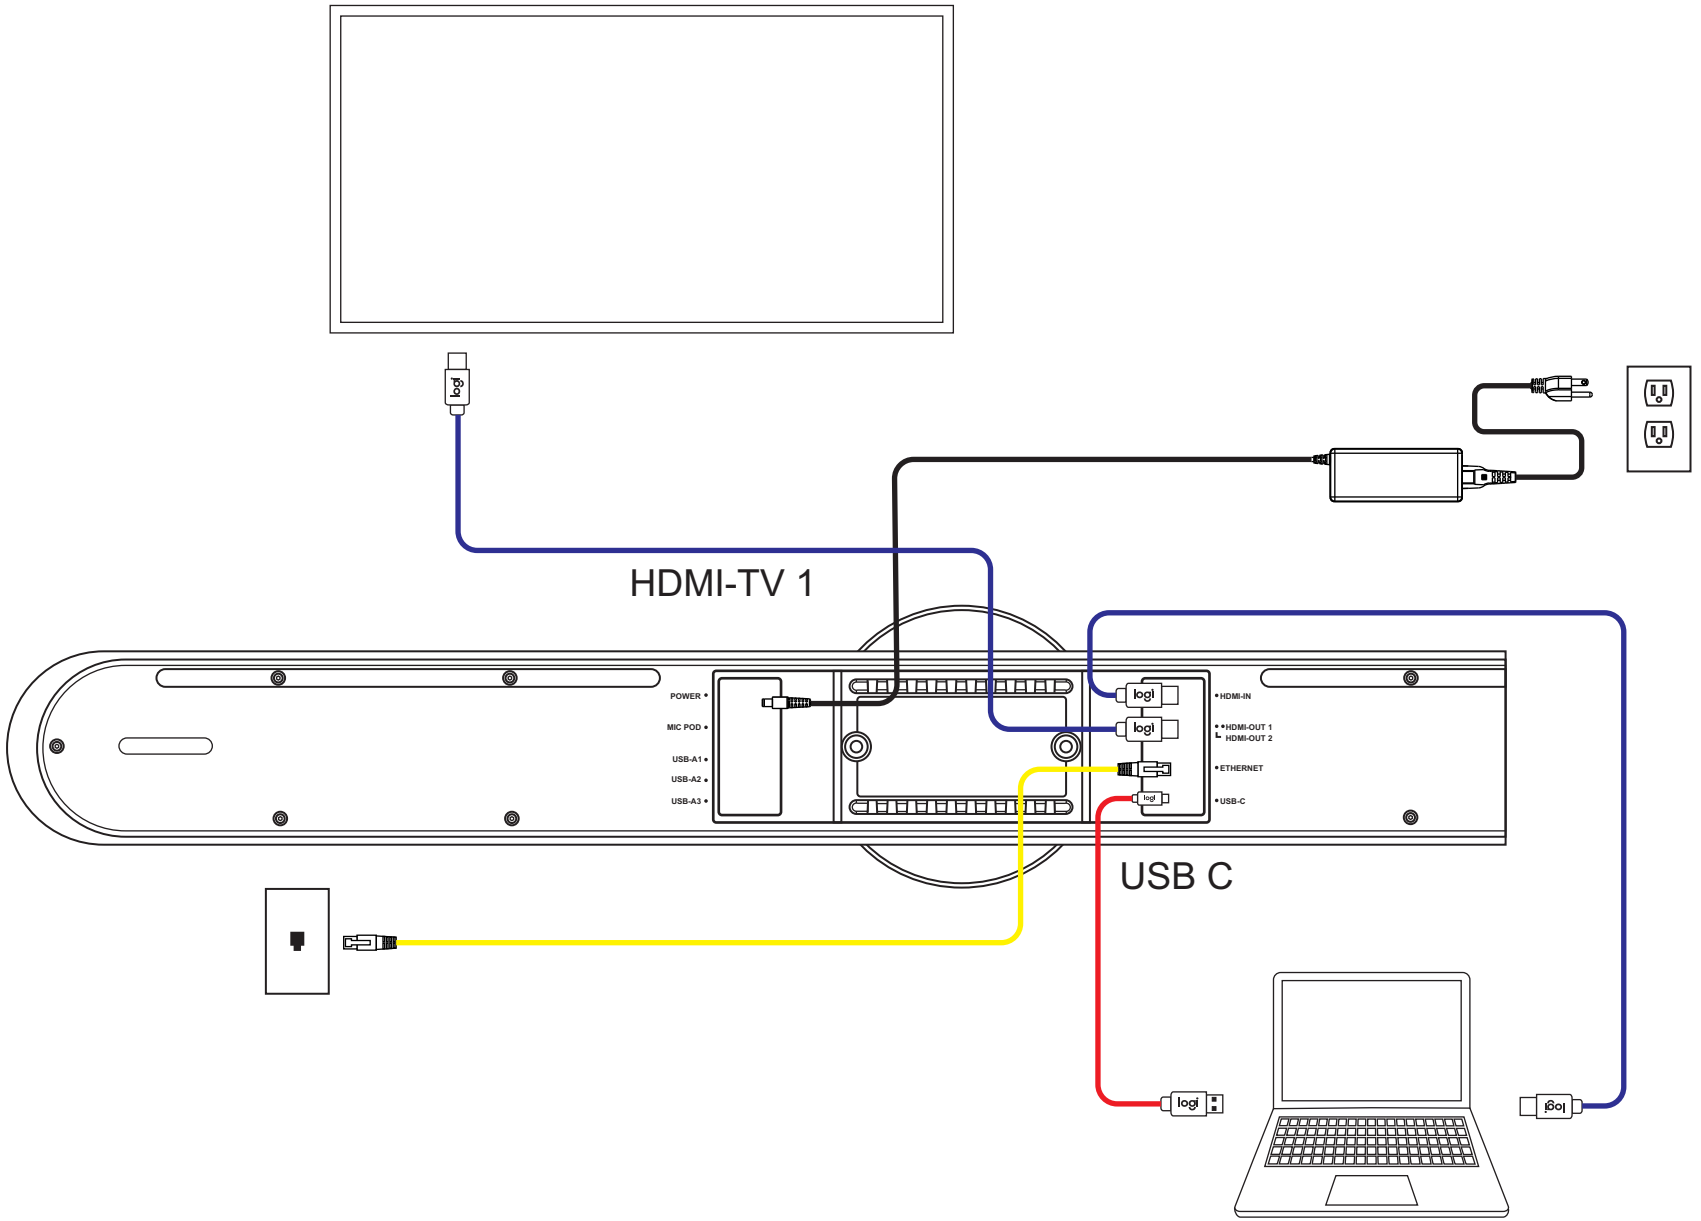


CAT
USB
HDMI

Rally Bar / Rally Bar Mini
BYOD Mode: Default configuration

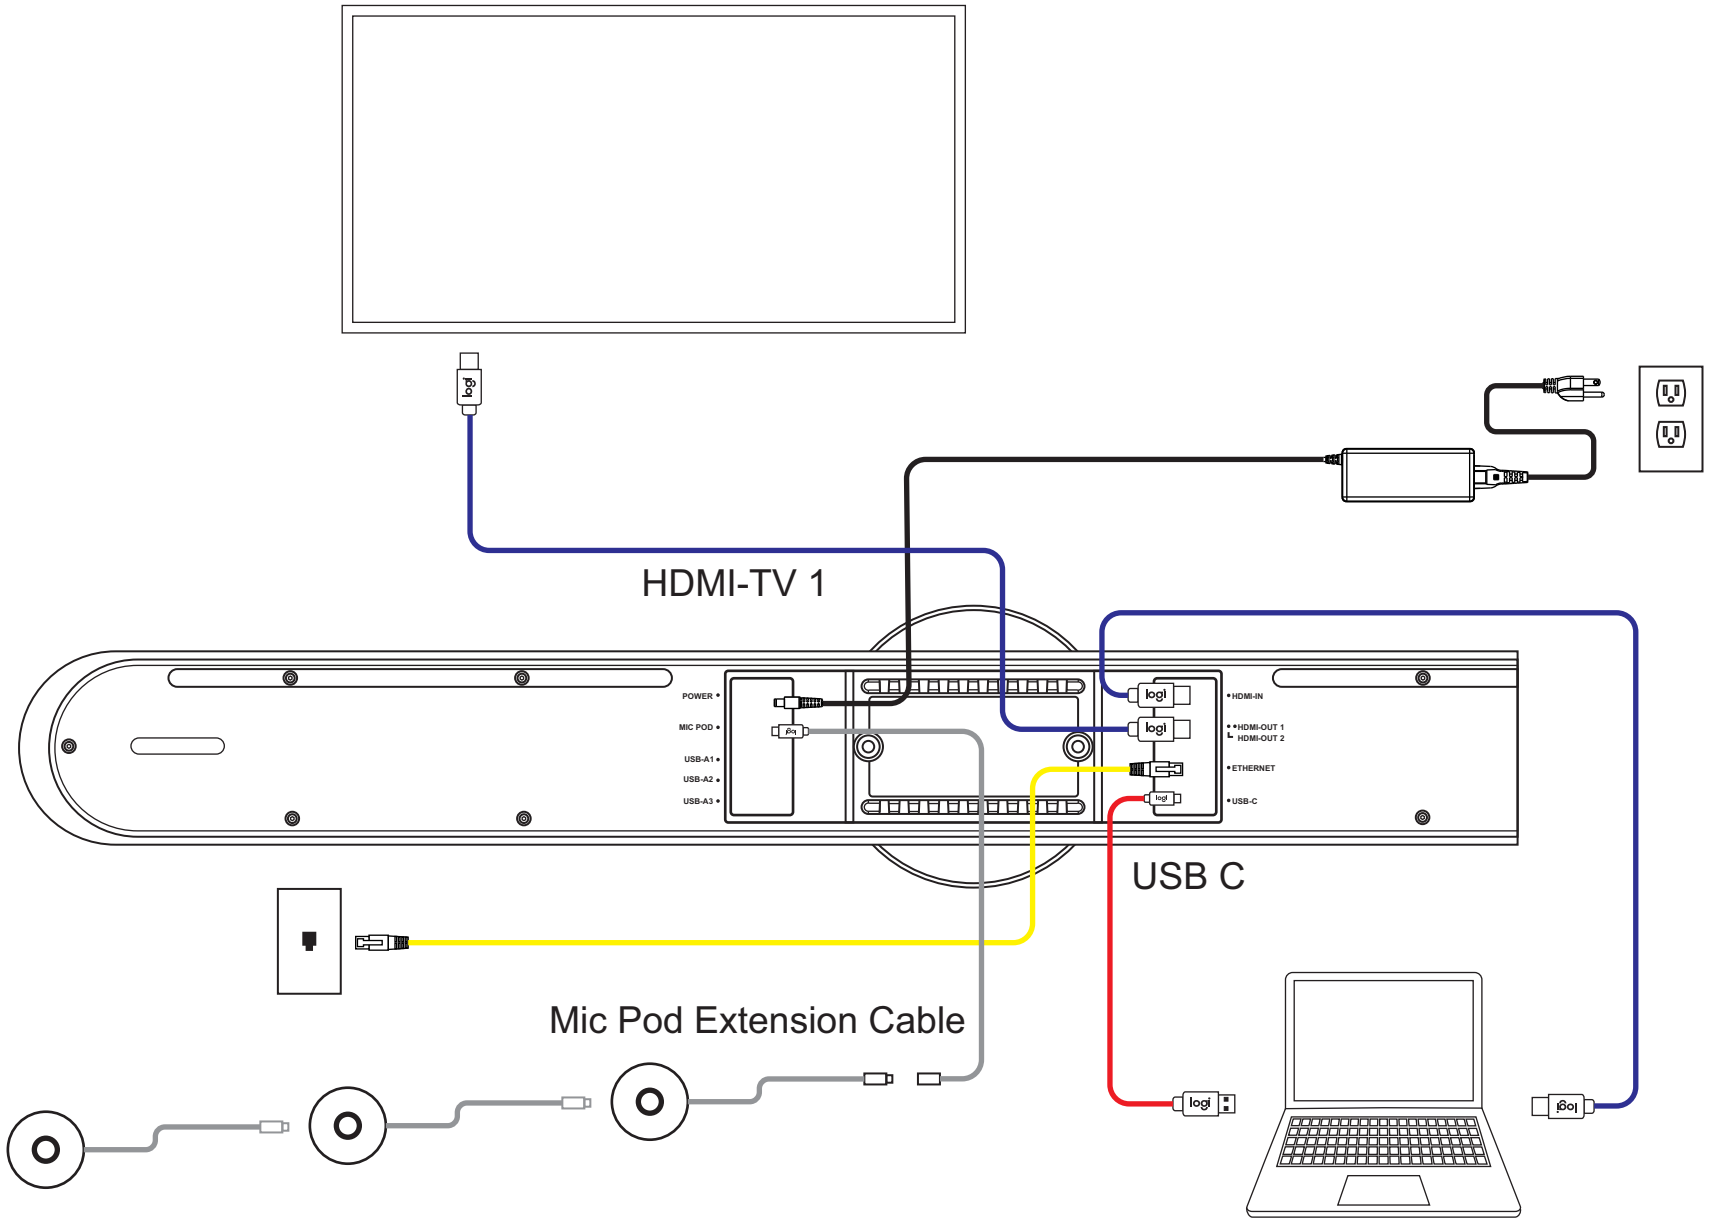


CAT
USB
HDMI
MIC

Rally Bar / Rally Bar Mini
BYOD Mode: Rally Bar up to 4 Mic Pods
Rally Bar Mini up to 3 Mic Pods

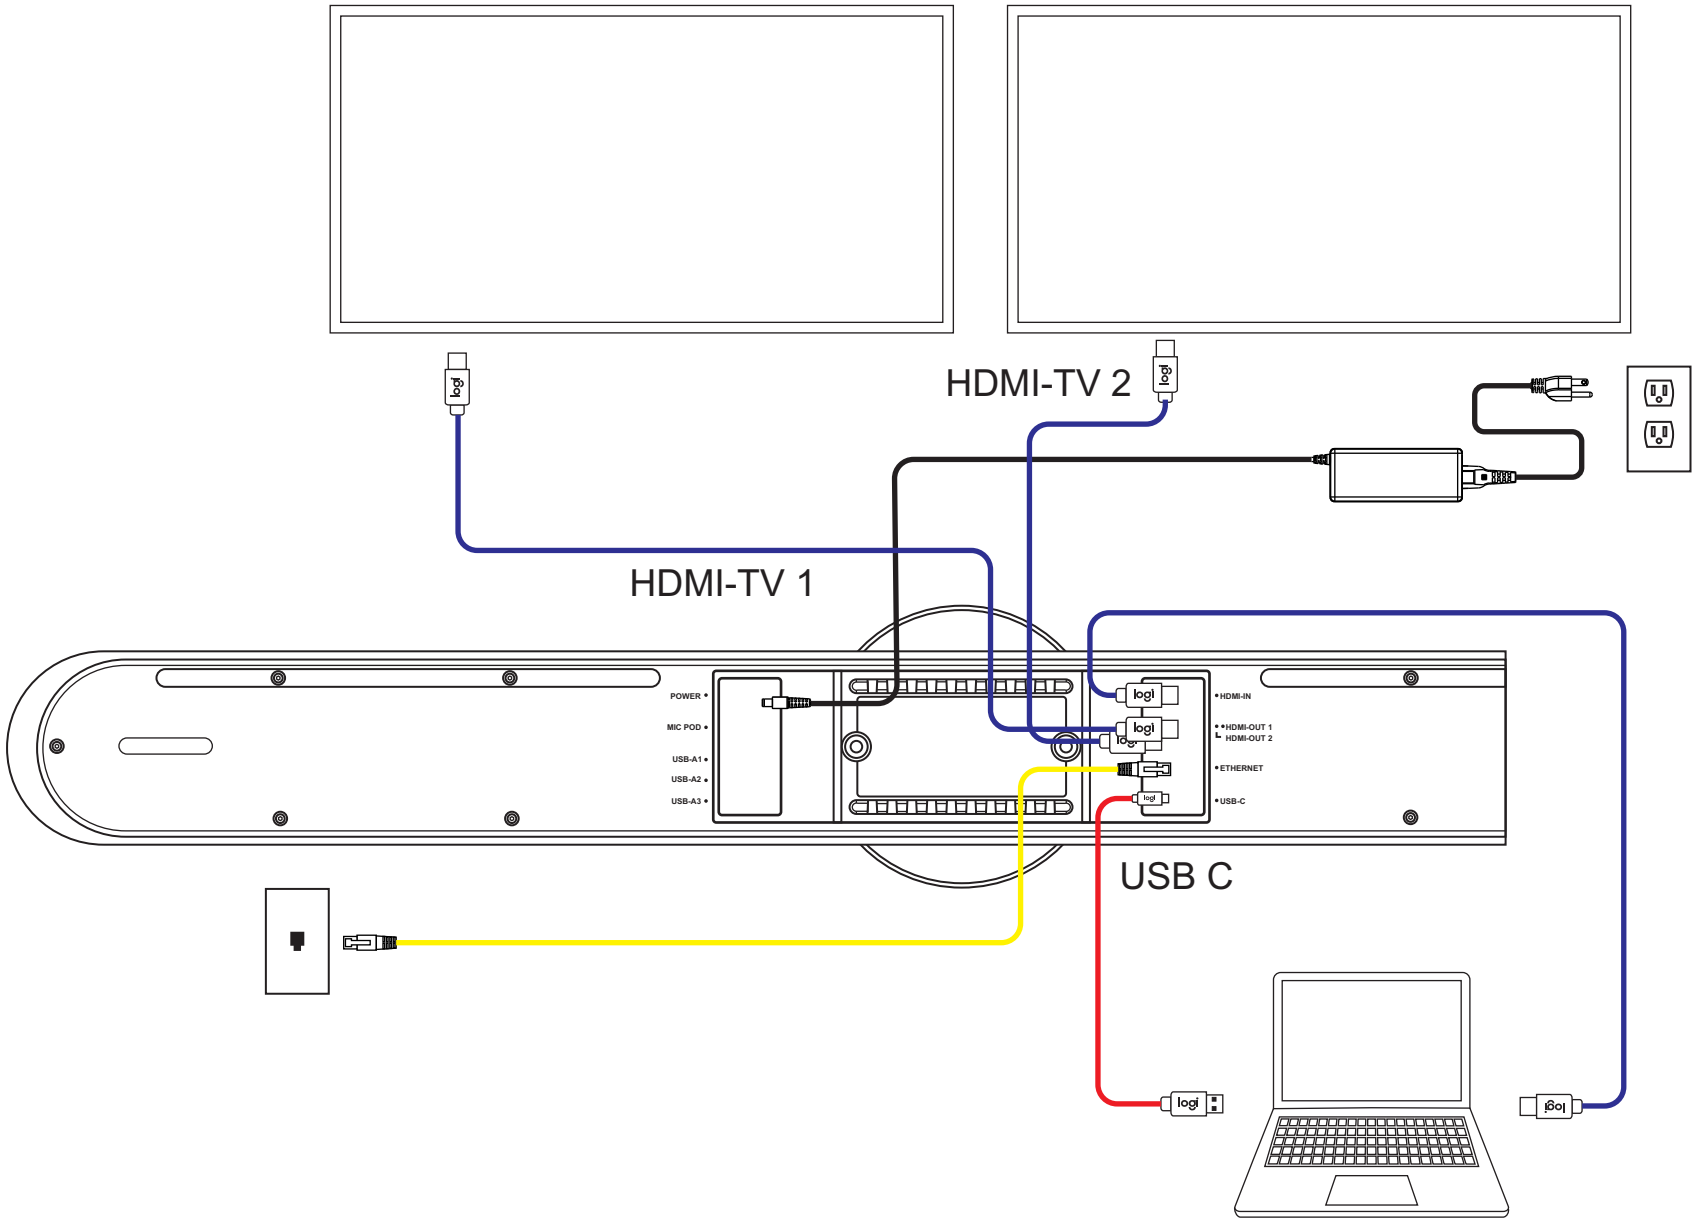

CAT
USB
HDMI

Rally Bar / Rally Bar Mini
BYOD Mode: Dual screens - screens are duplicated

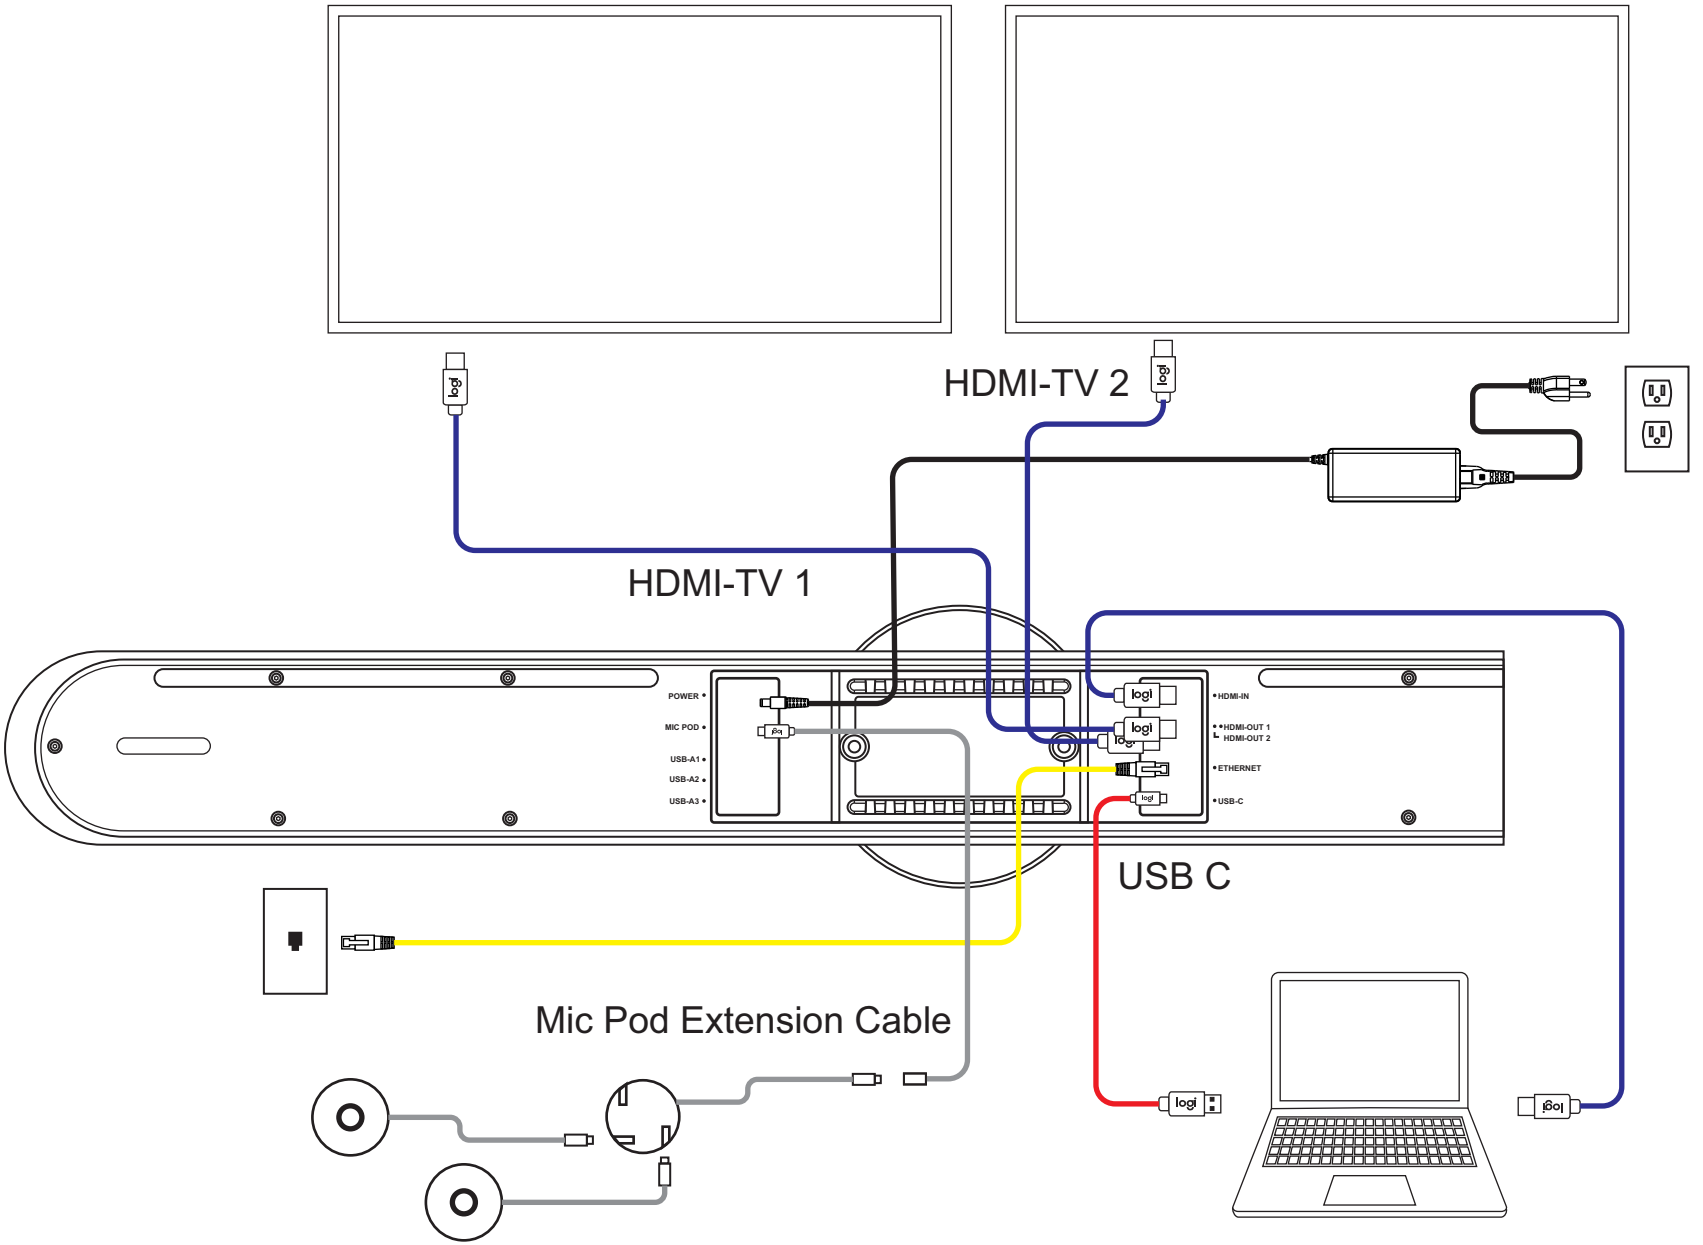


CAT
USB
HDMI
MIC

Rally Bar / Rally Bar Mini

BYOD Mode: Rally Bar max 4 Mic Pods + 2 Mic Pod Hubs /Rally Bar Mini max 3 Mic Pods + 2 Mic Pod Hubs


RALLY BAR & RALLY BAR MINI IN USB MODE

Table of Contents

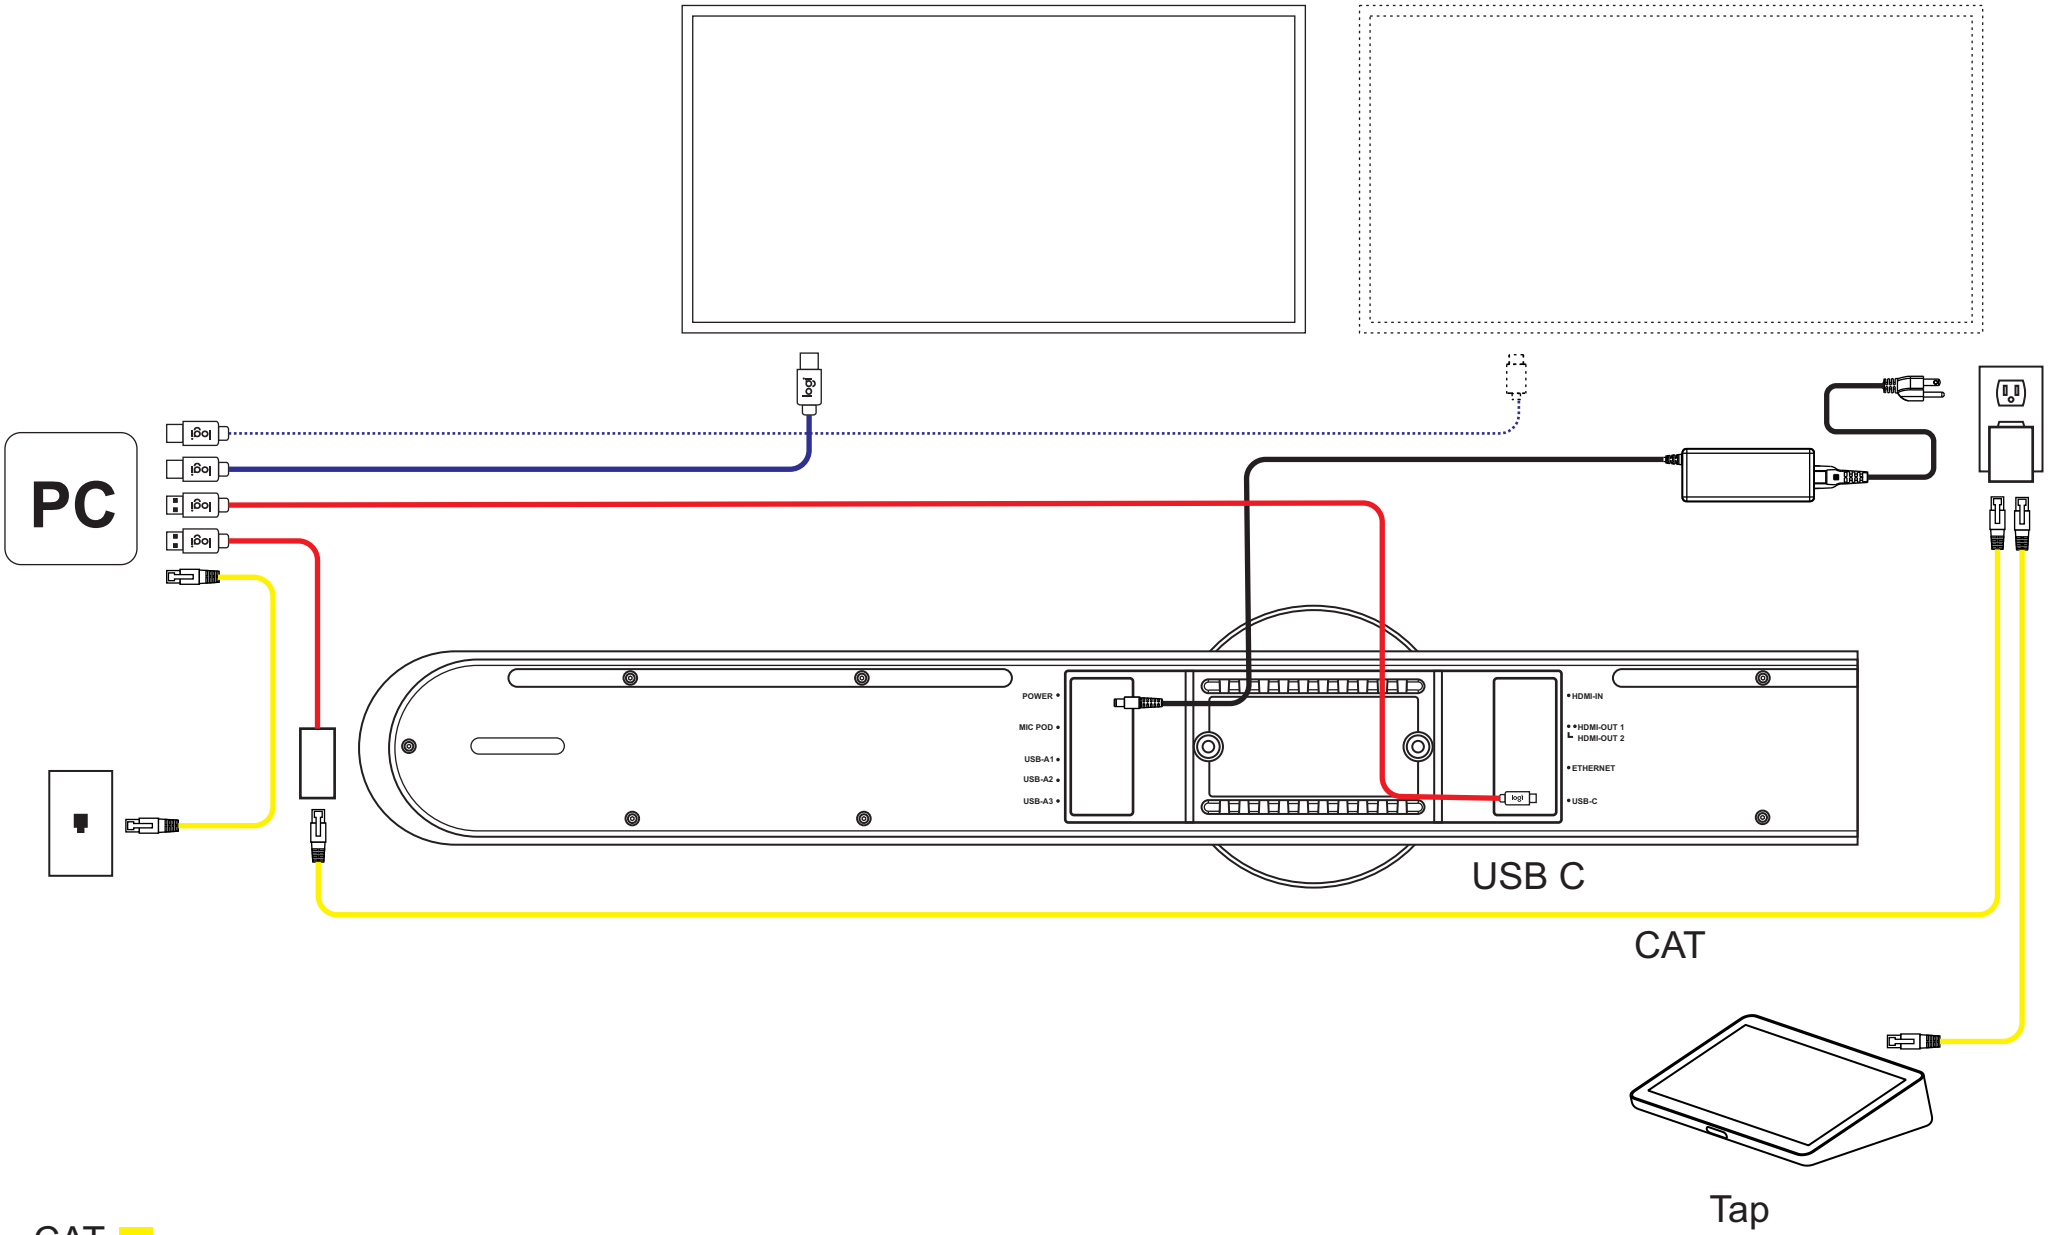


CAT
USB
HDMI

Rally Bar / Rally Bar Mini
USB Mode: Default configuration

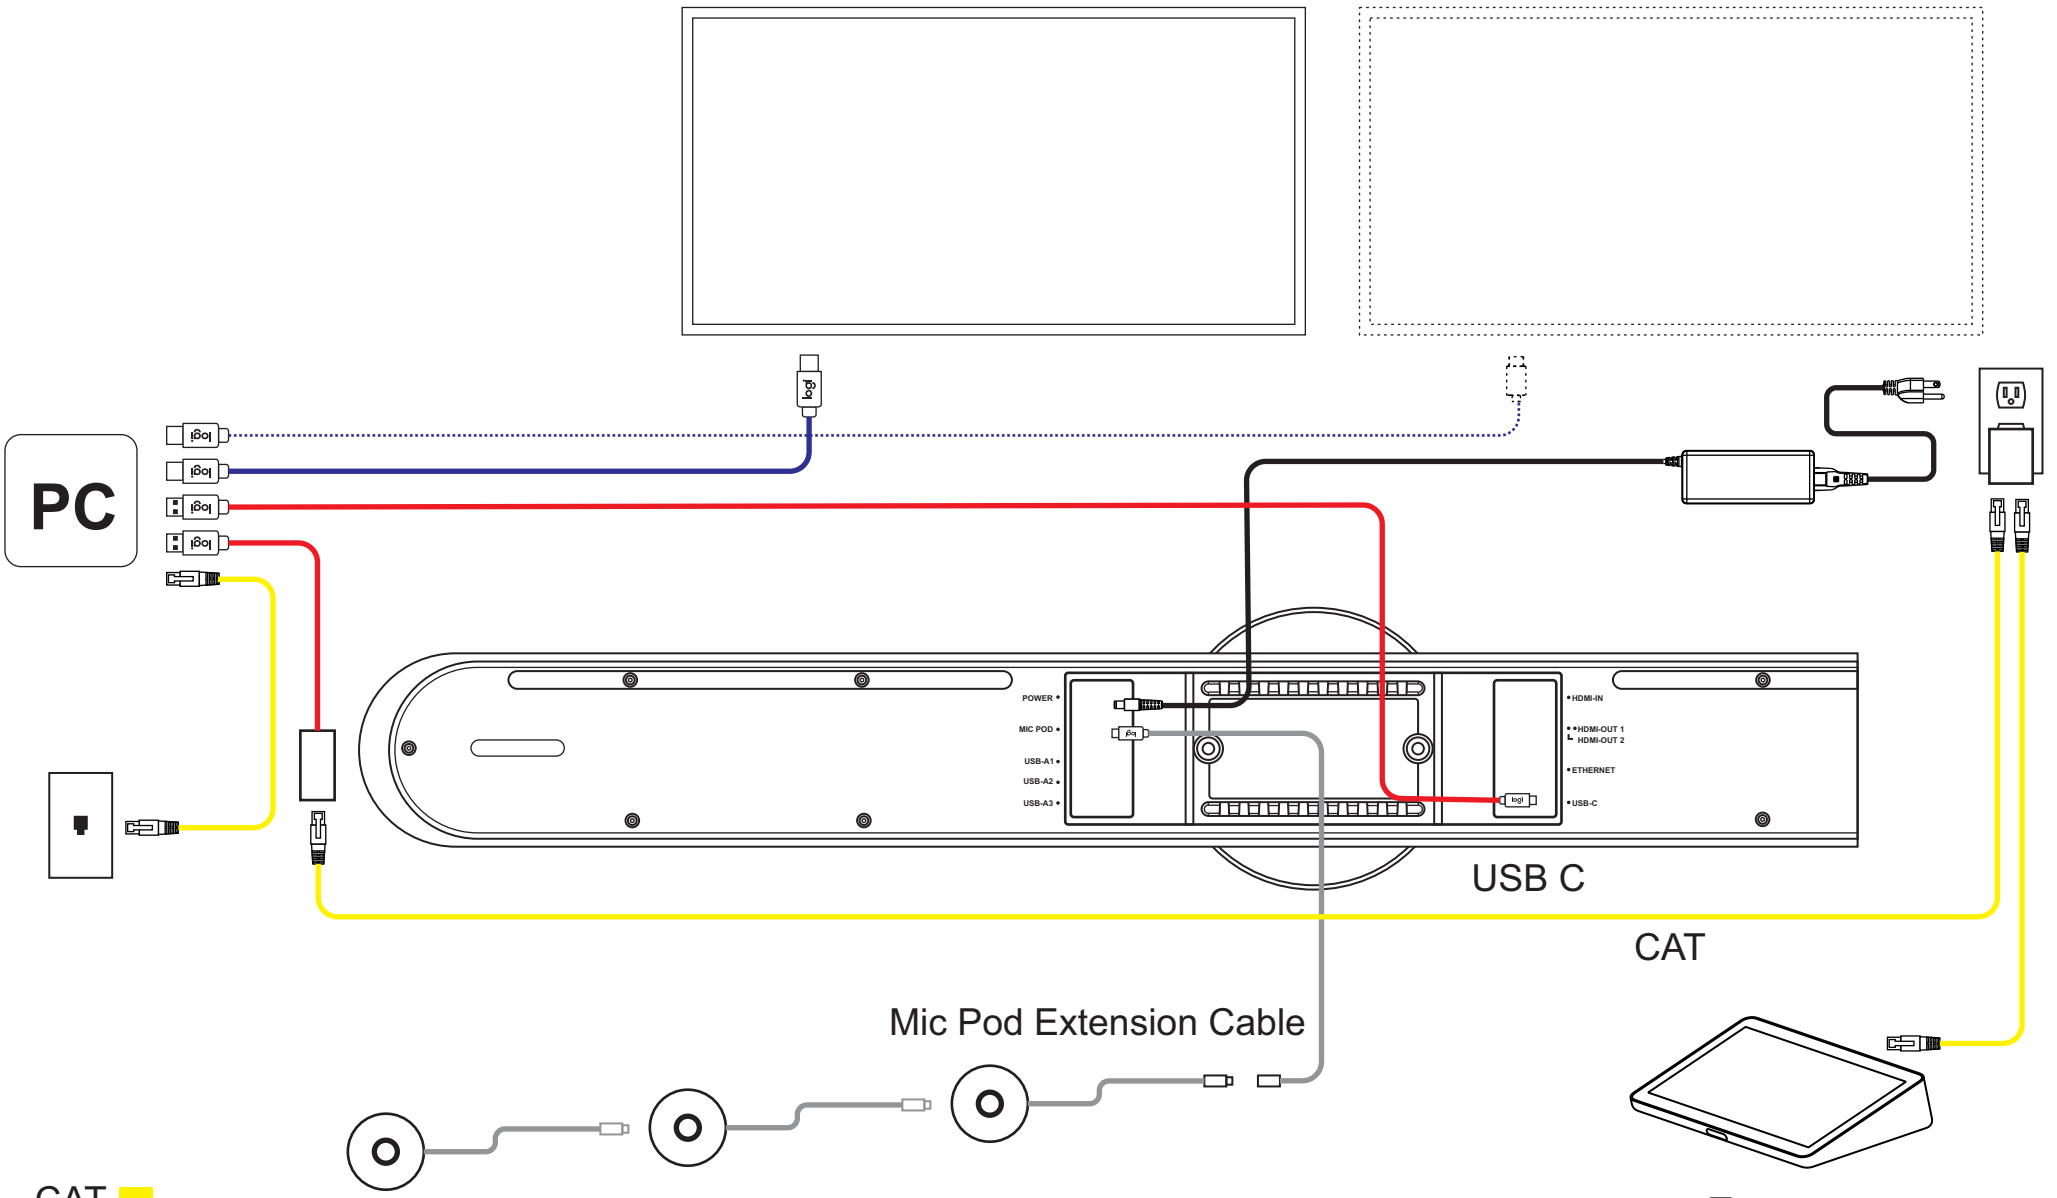


Rally Bar / Rally Bar Mini
USB Mode: Rally Bar up to 4 mic pods
Rally Bar Mini up to 3 mic pods

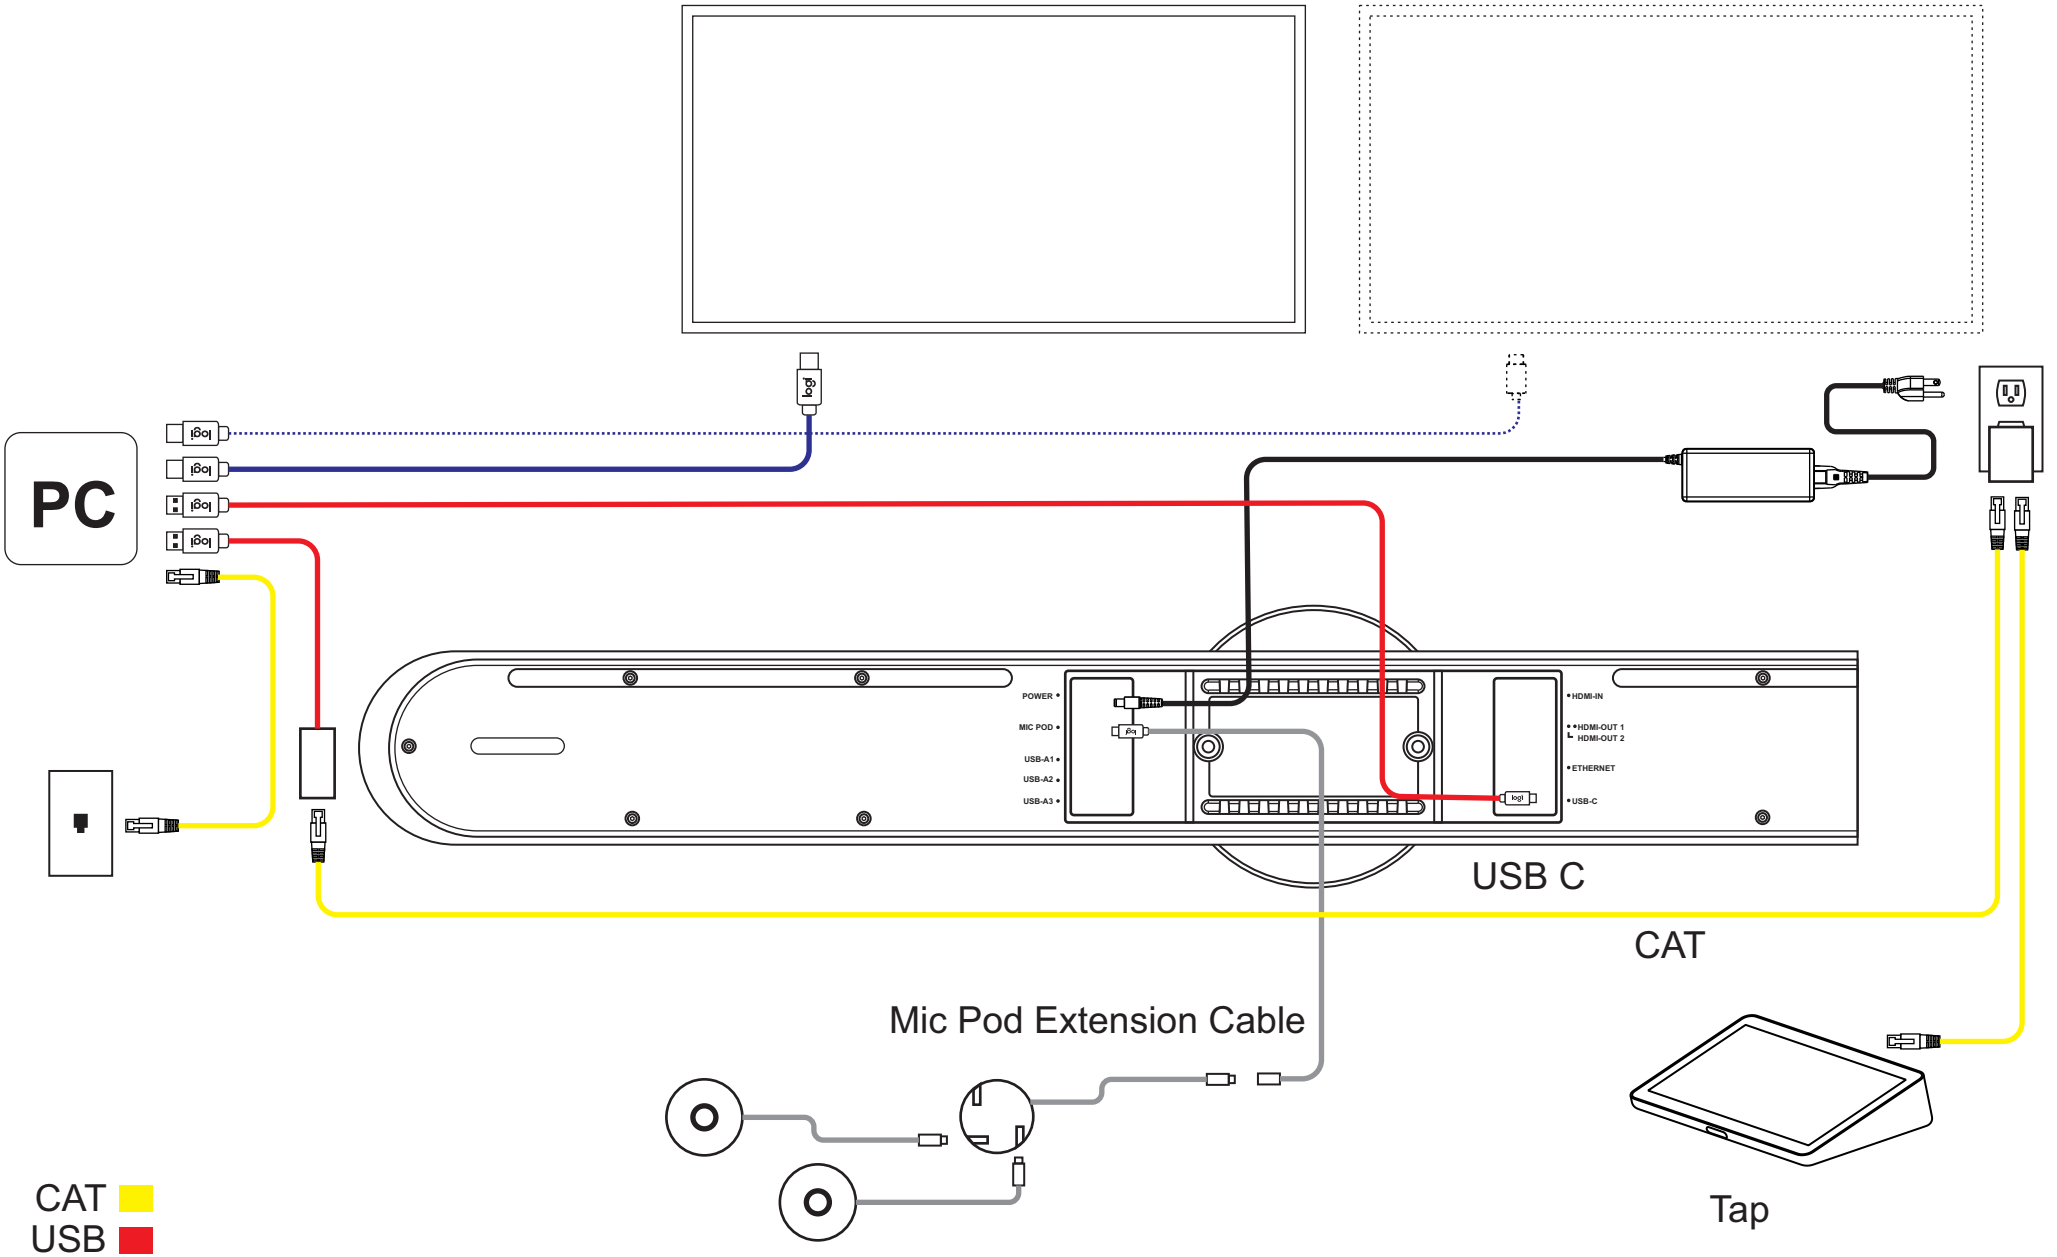


Rally Bar / Rally Bar Mini

USB Mode: Rally Bar max 4 Mic Pods + 2 Mic Pod Hubs /Rally Bar Mini max 3 Mic Pods + 2 Mic Pod Hubs

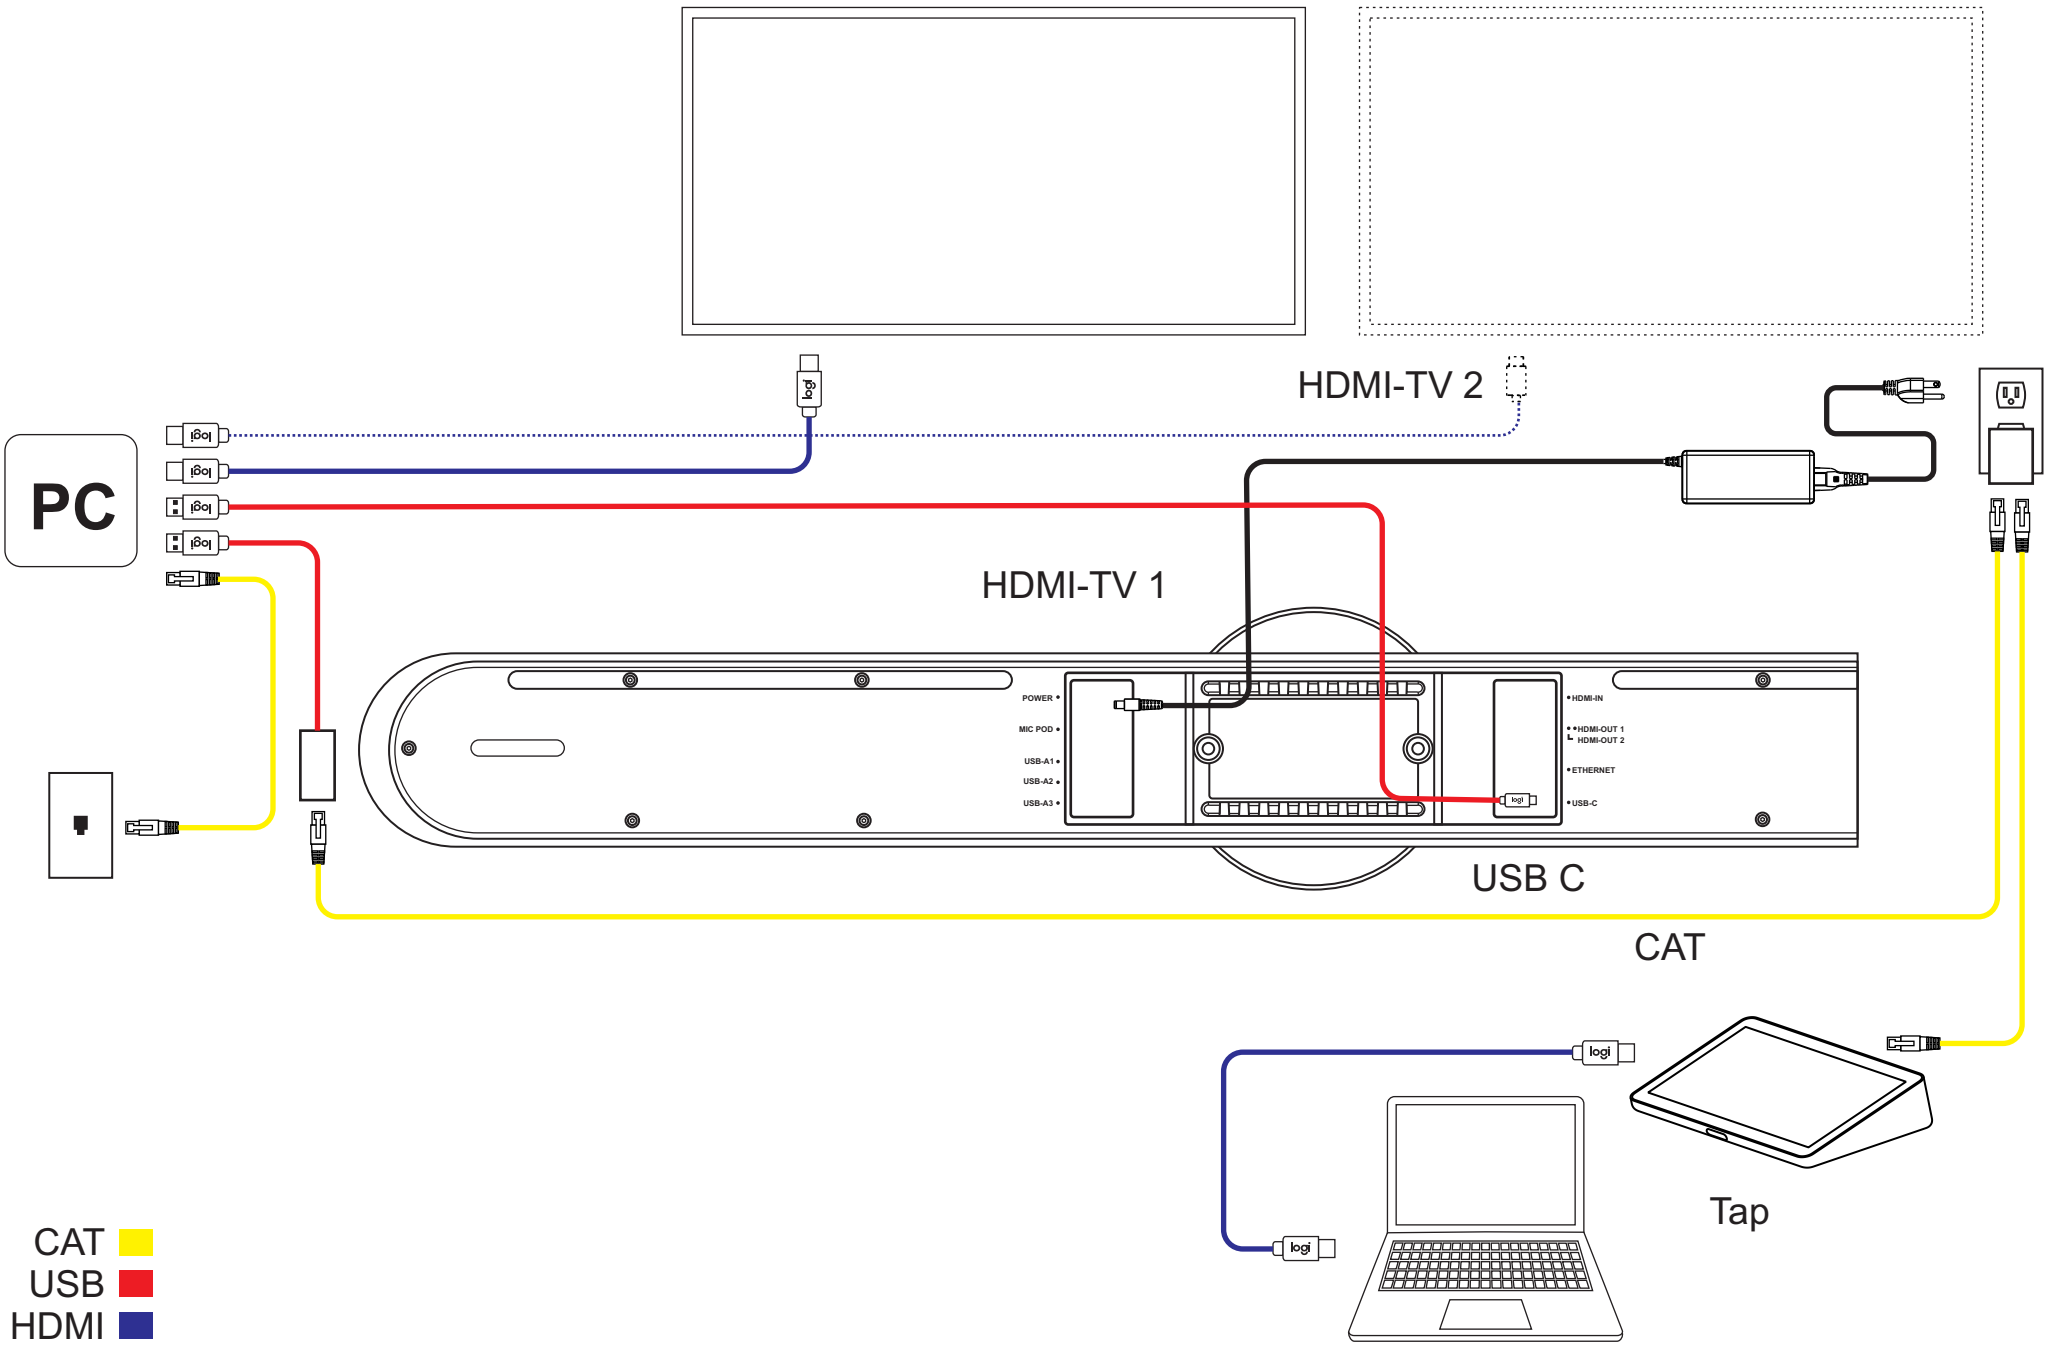

Rally Bar / Rally Bar Mini
USB Mode: Wired screen share (VC application dependent)

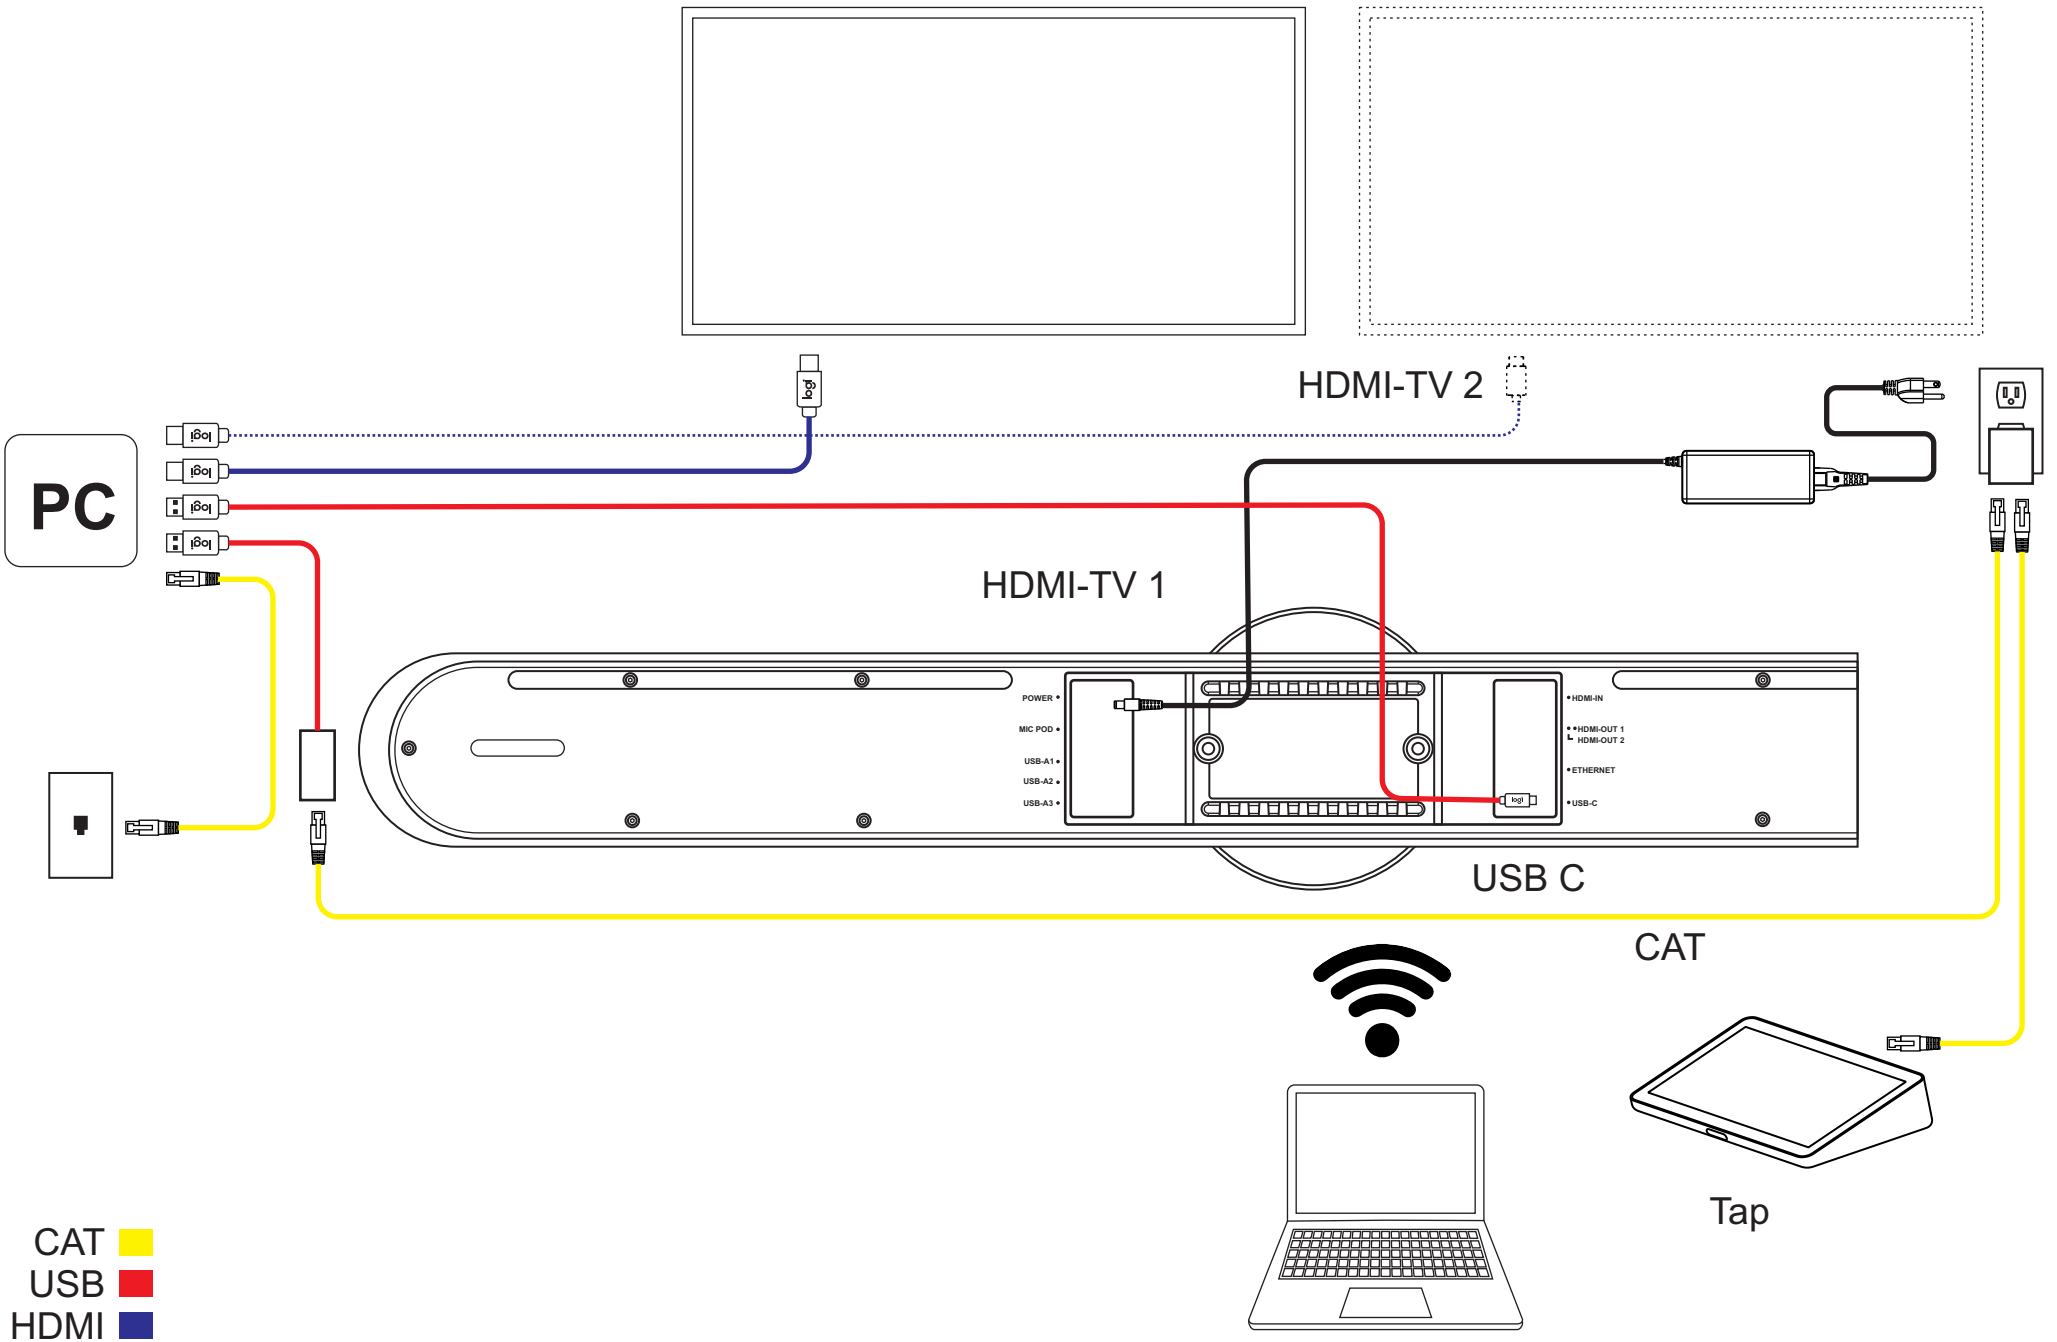


Rally Bar / Rally Bar Mini

USB Mode: Wireless screen share through VC application (VC application dependent)


RALLY BAR, RALLY BAR MINI, RALLY BAR HUDDLE & ROOMMATE WITH INTERACTIVE TOUCH SCREENS

Table of Contents

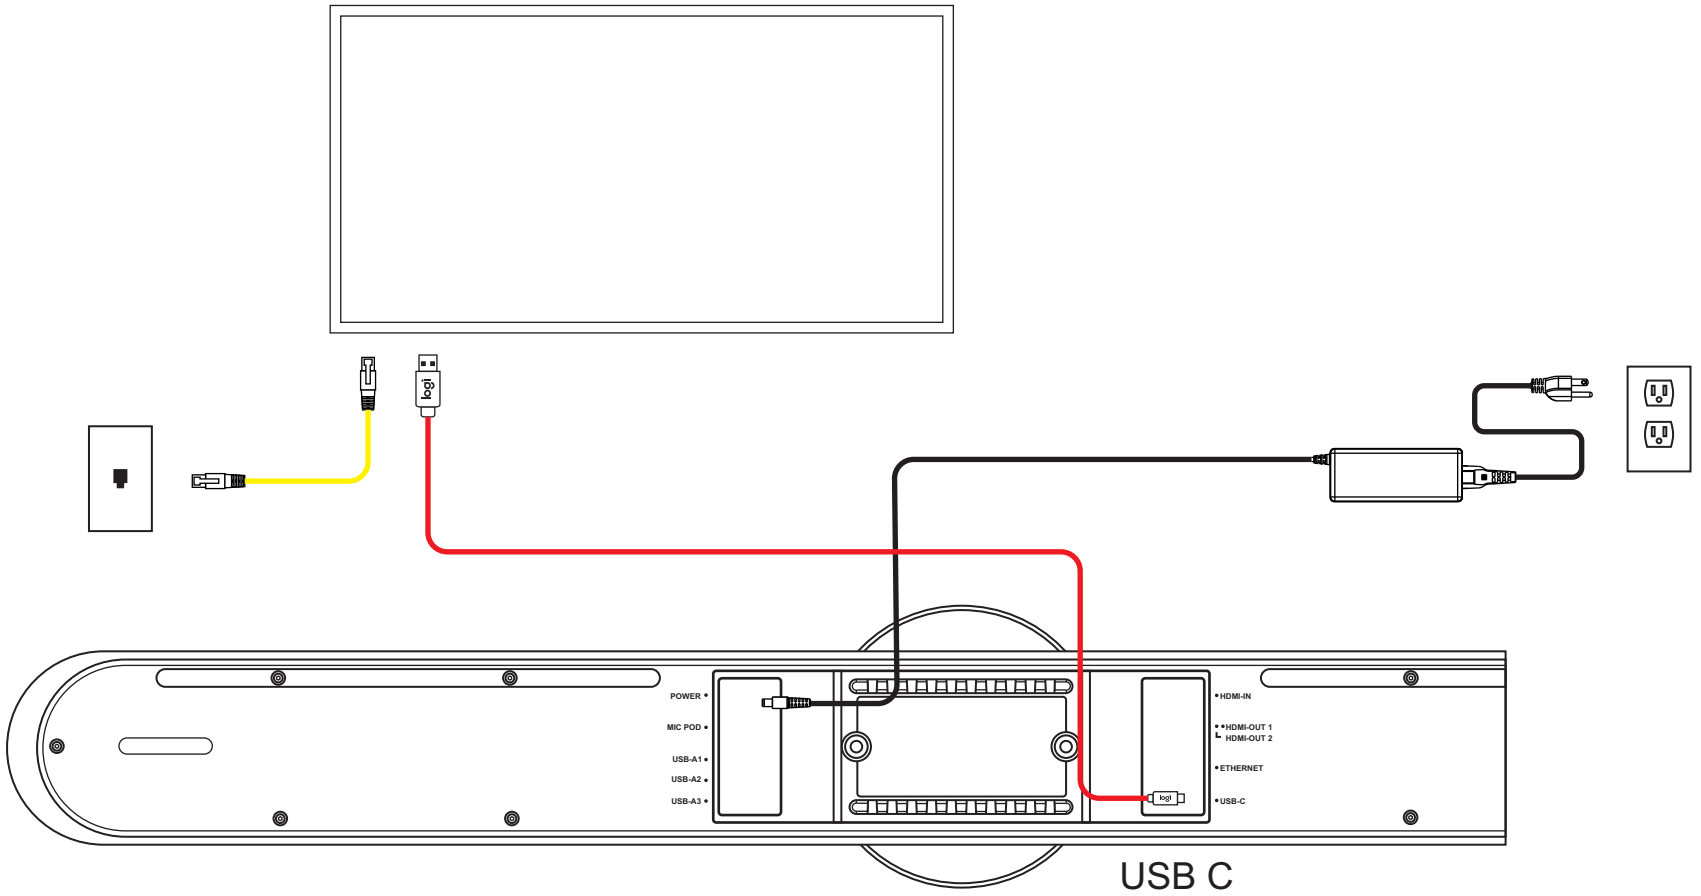


CAT
USB
HDMI

Rally Bar / Rally Bar Mini
USB Mode: Touch panel with built-in computer
Tap USB not supported in touch screen environments

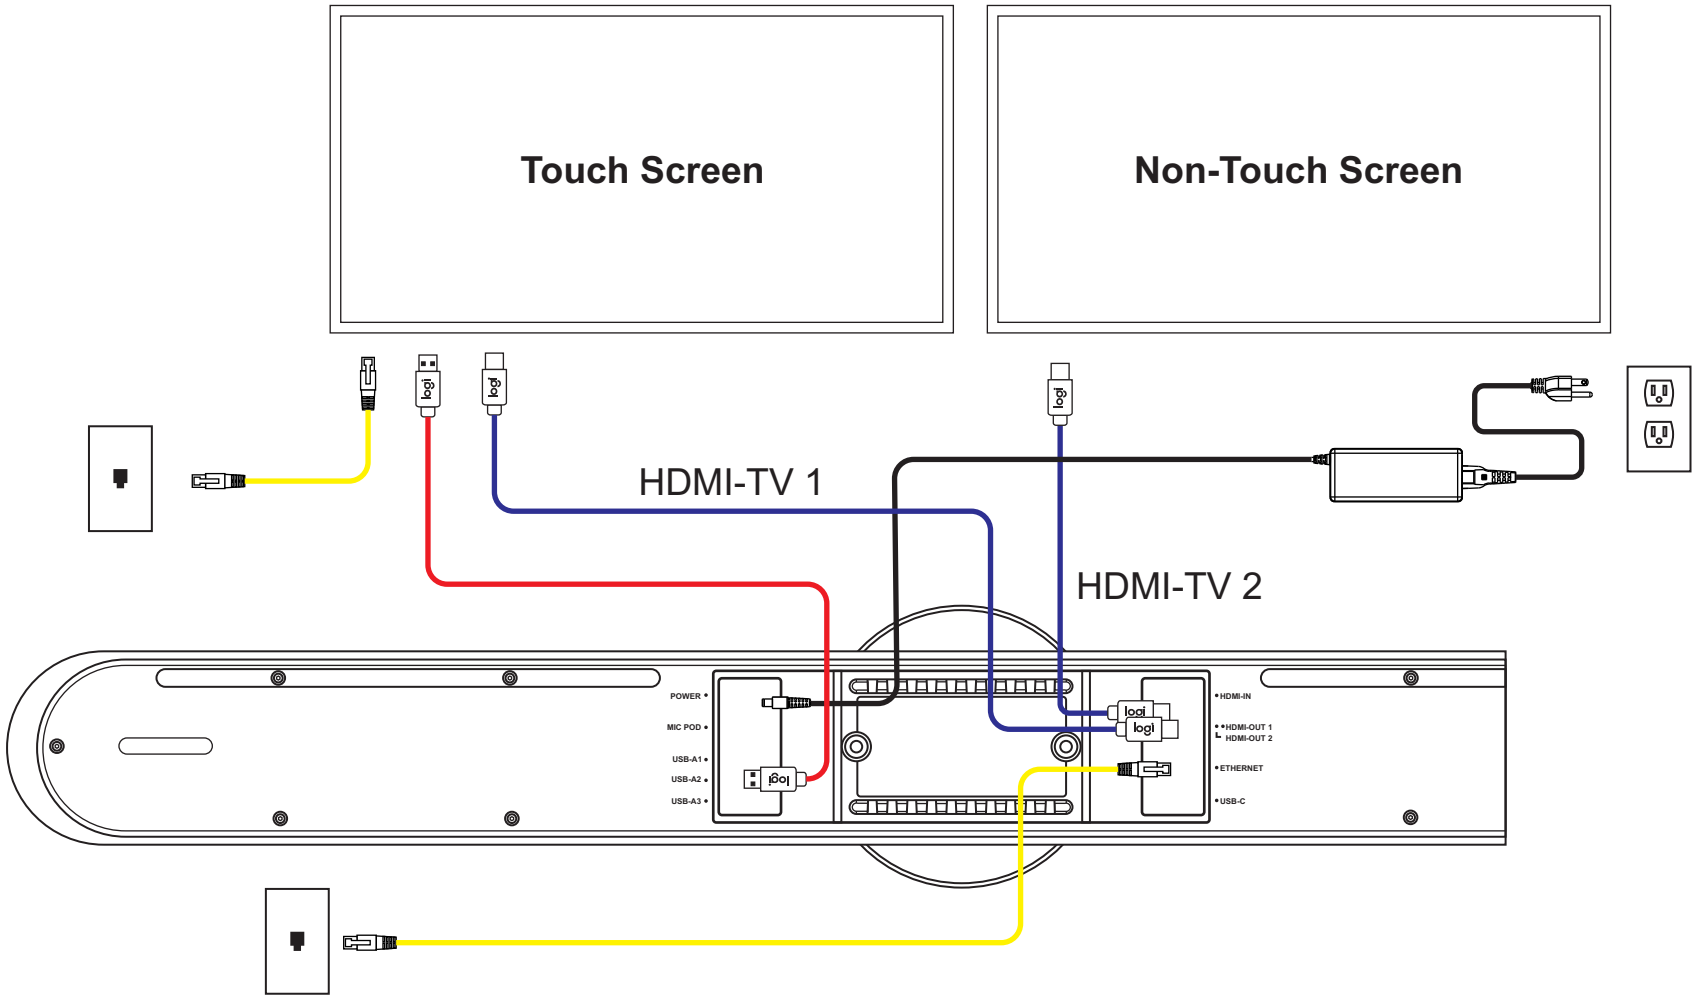


CAT
USB
HDMI

Rally Bar / Rally Bar Mini
Appliance Mode: Touch screen
Tap USB not supported in touch screen environments
Second screen not supported in Teams

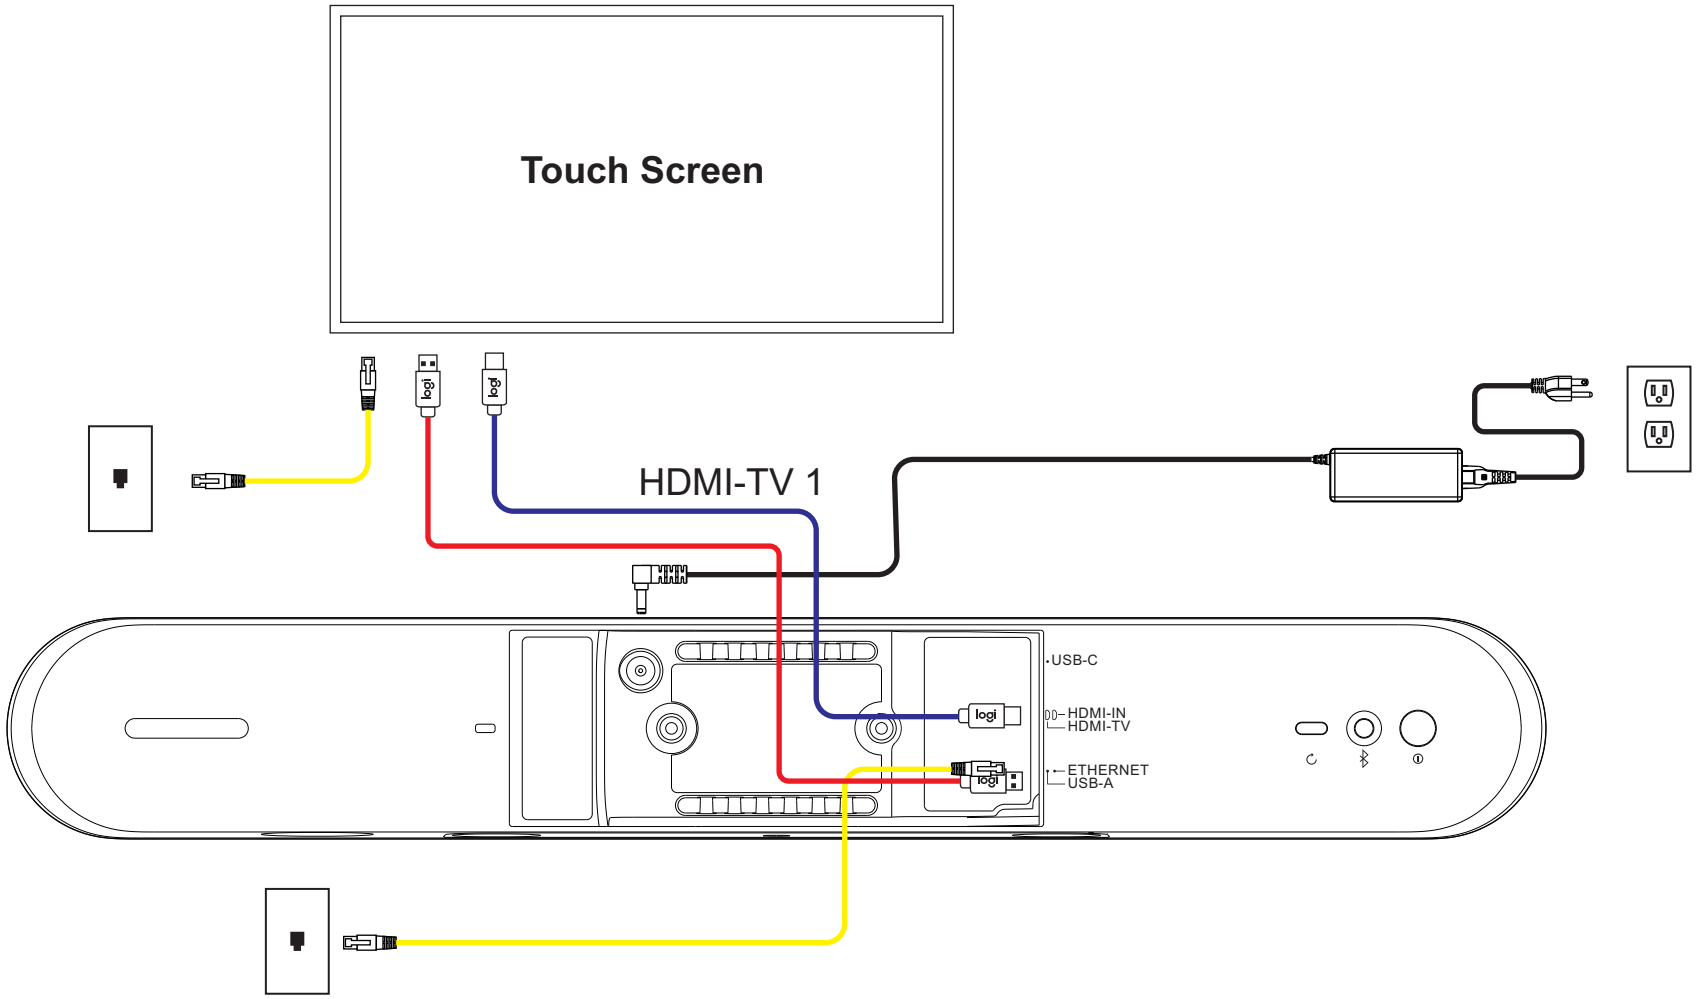

CAT
USB
HDMI

Rally Bar Huddle
Appliance Mode: Touch screen
Tap USB not supported in touch screen environments

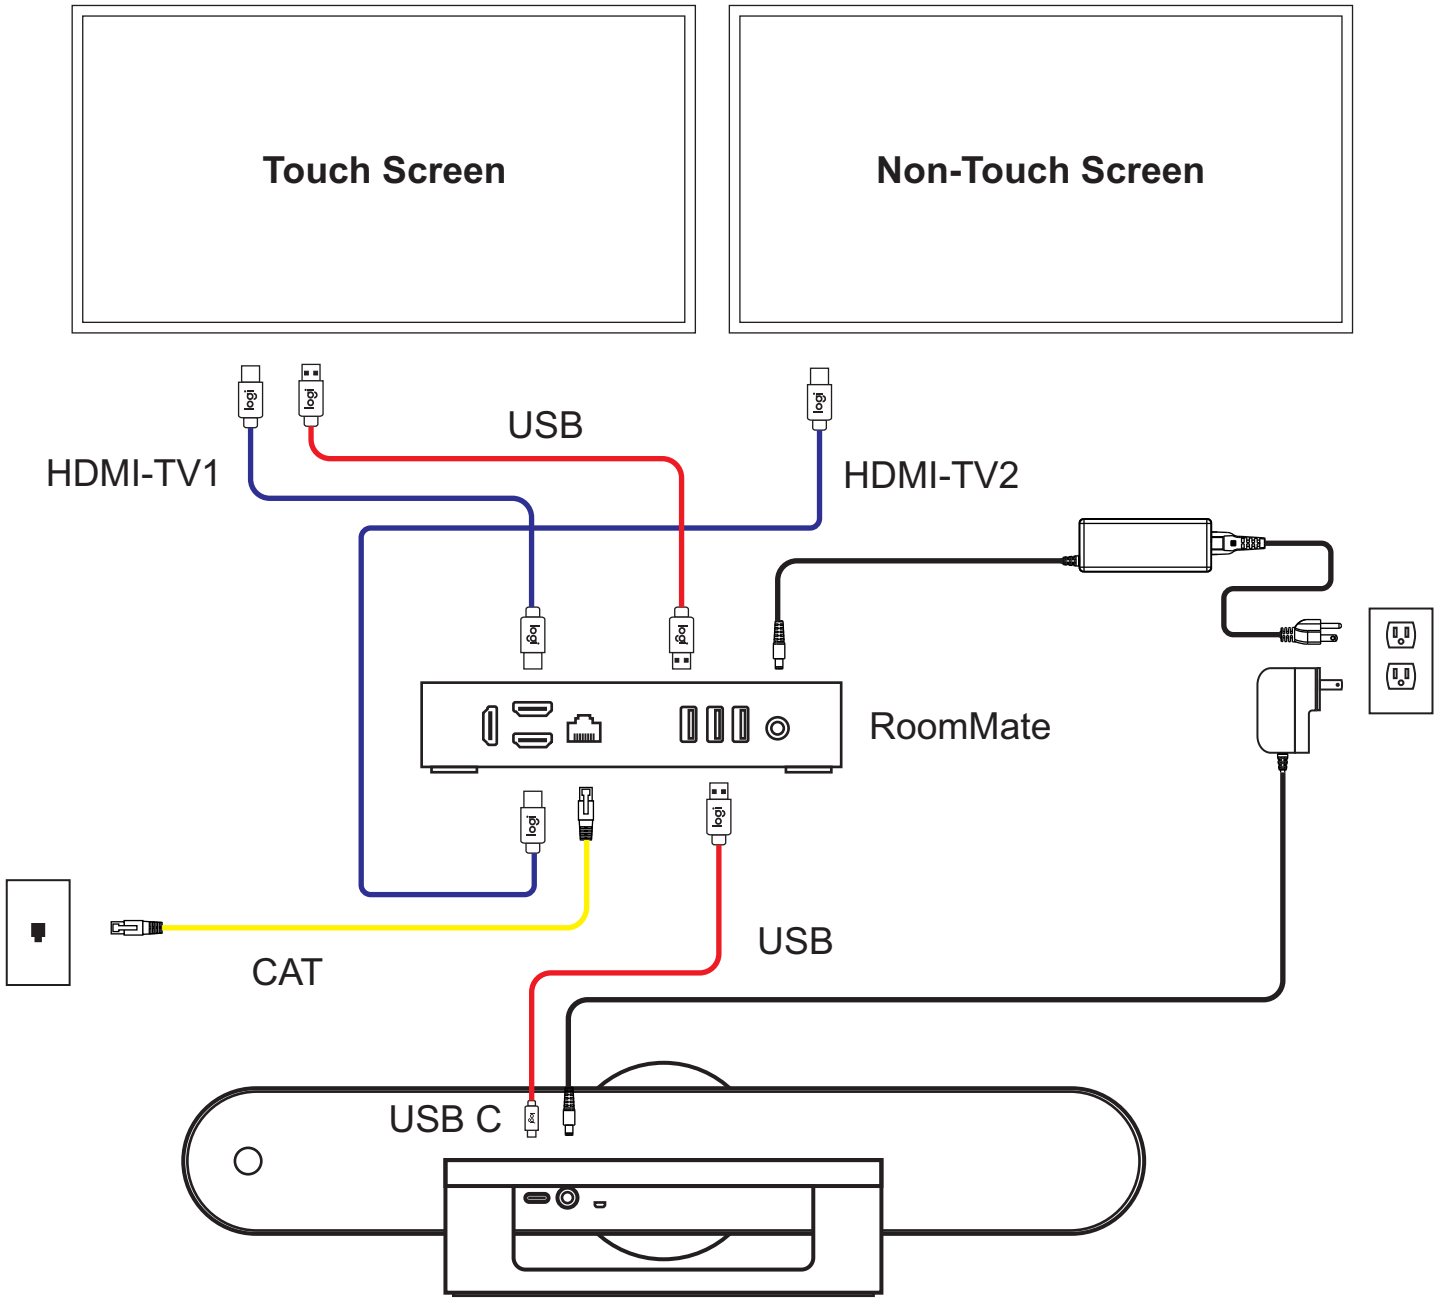


CAT
USB
HDMI


RoomMate and MeetUp
Appliance Mode: Touch screen
Tap USB not supported in touch screen environments
Second screen not supported in Teams


RALLY & RALLY PLUS

Table of Contents

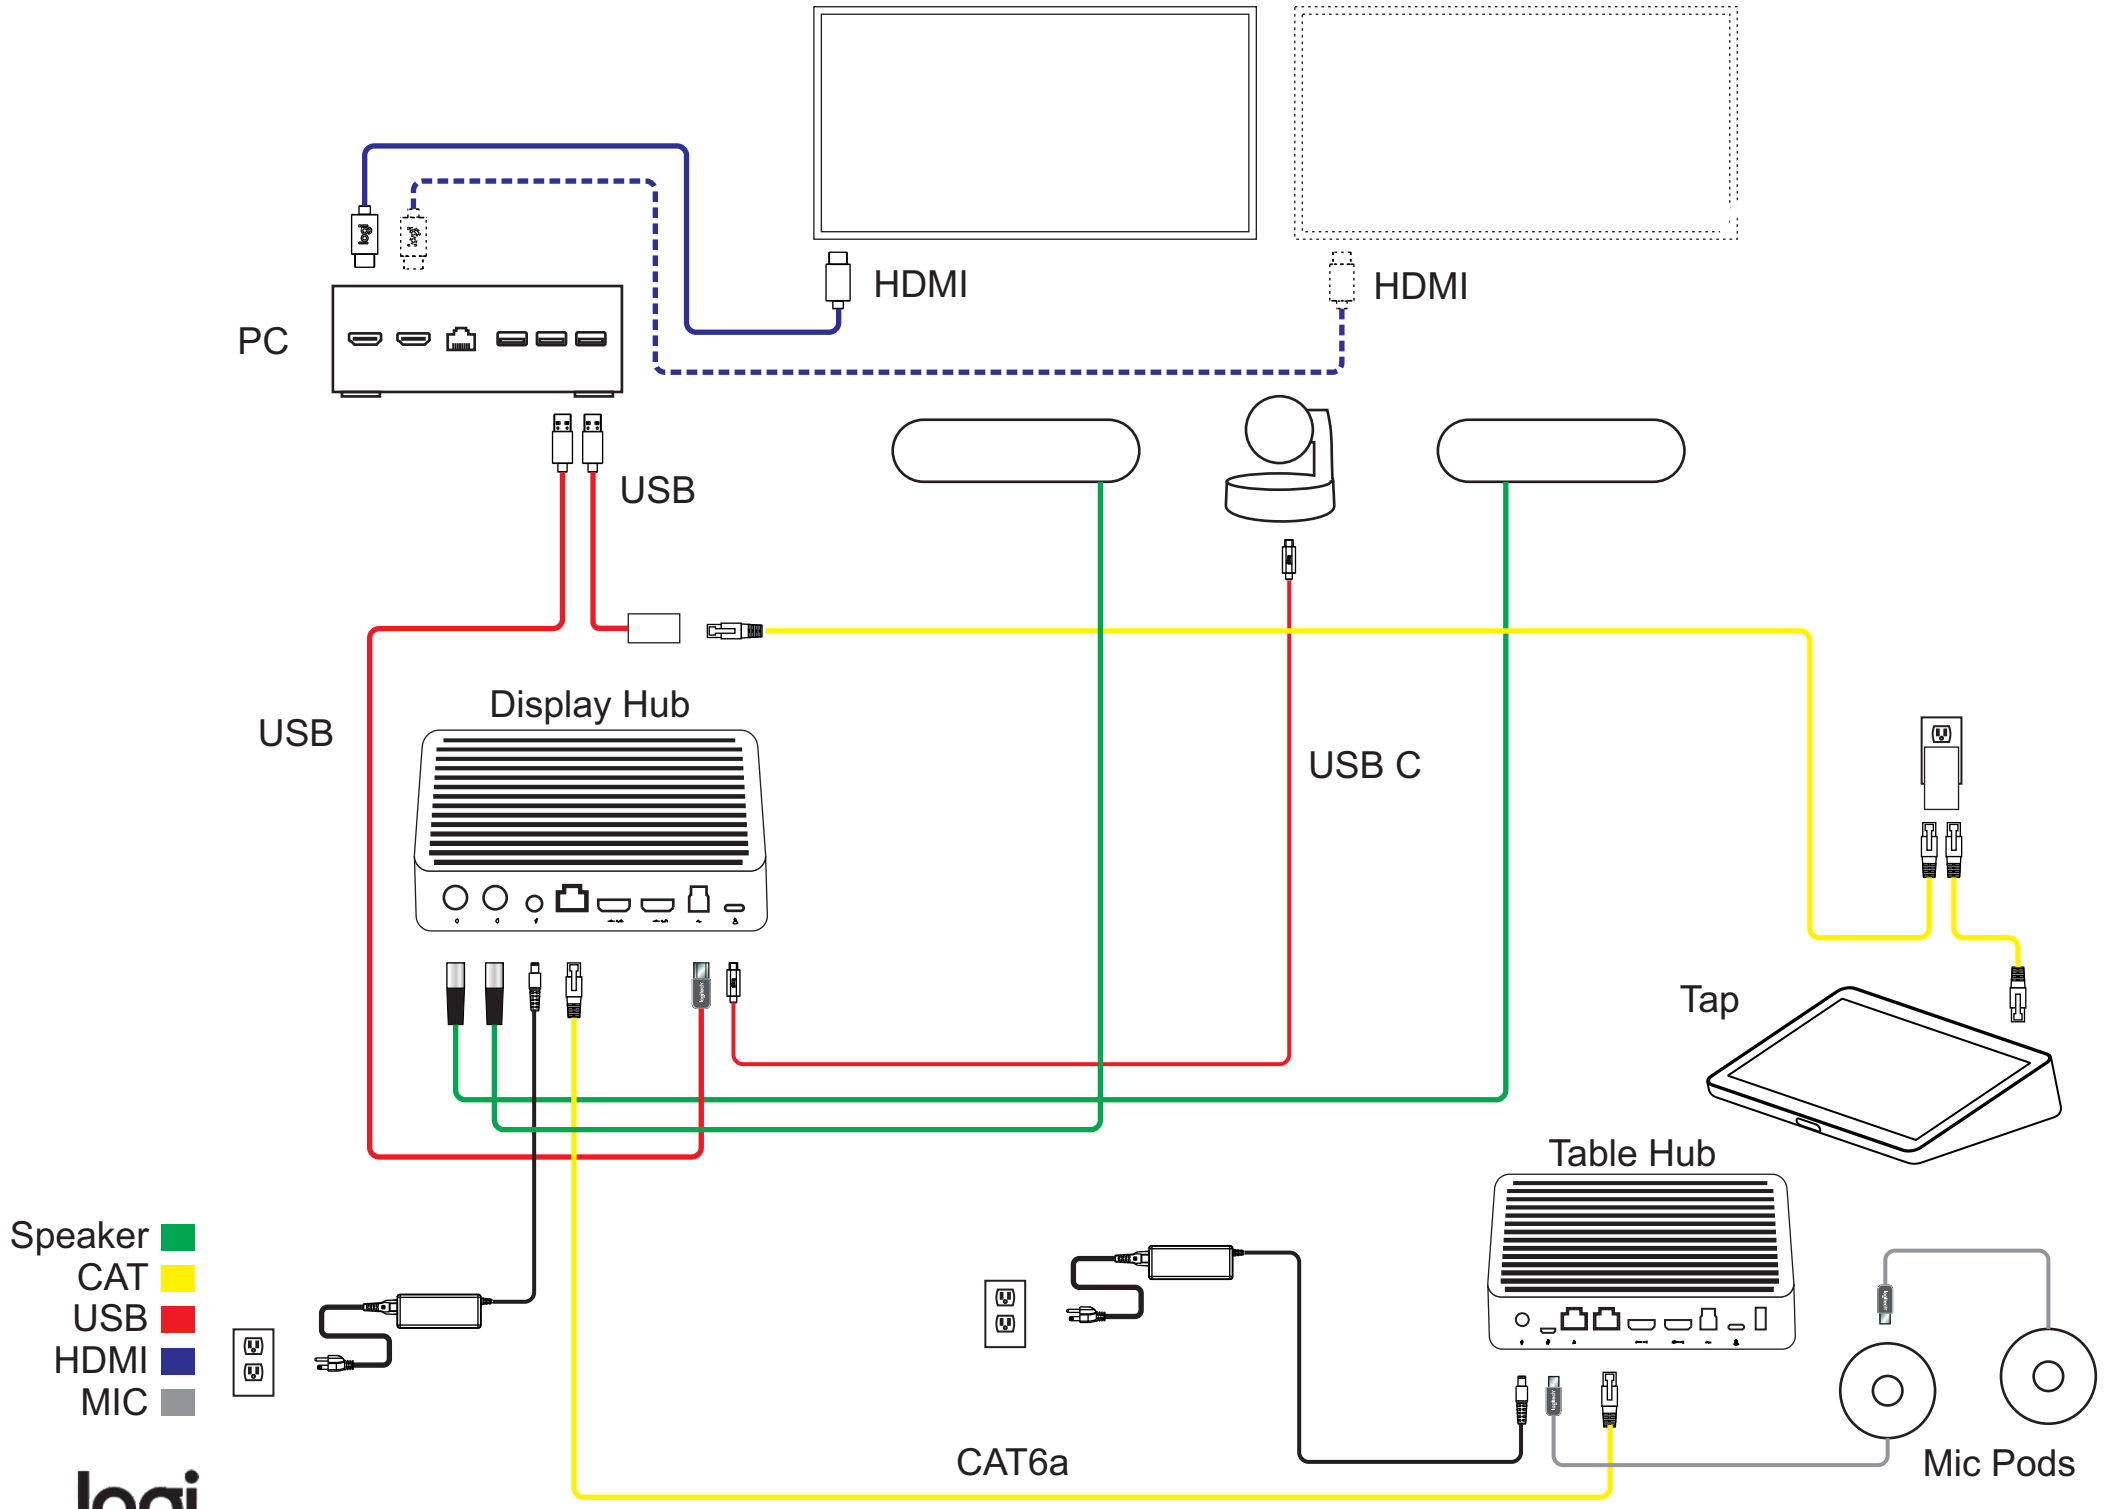


Rally Plus: compute at Display Hub. Up to 7 Mic Pod and 7 Mic Pod Hubs

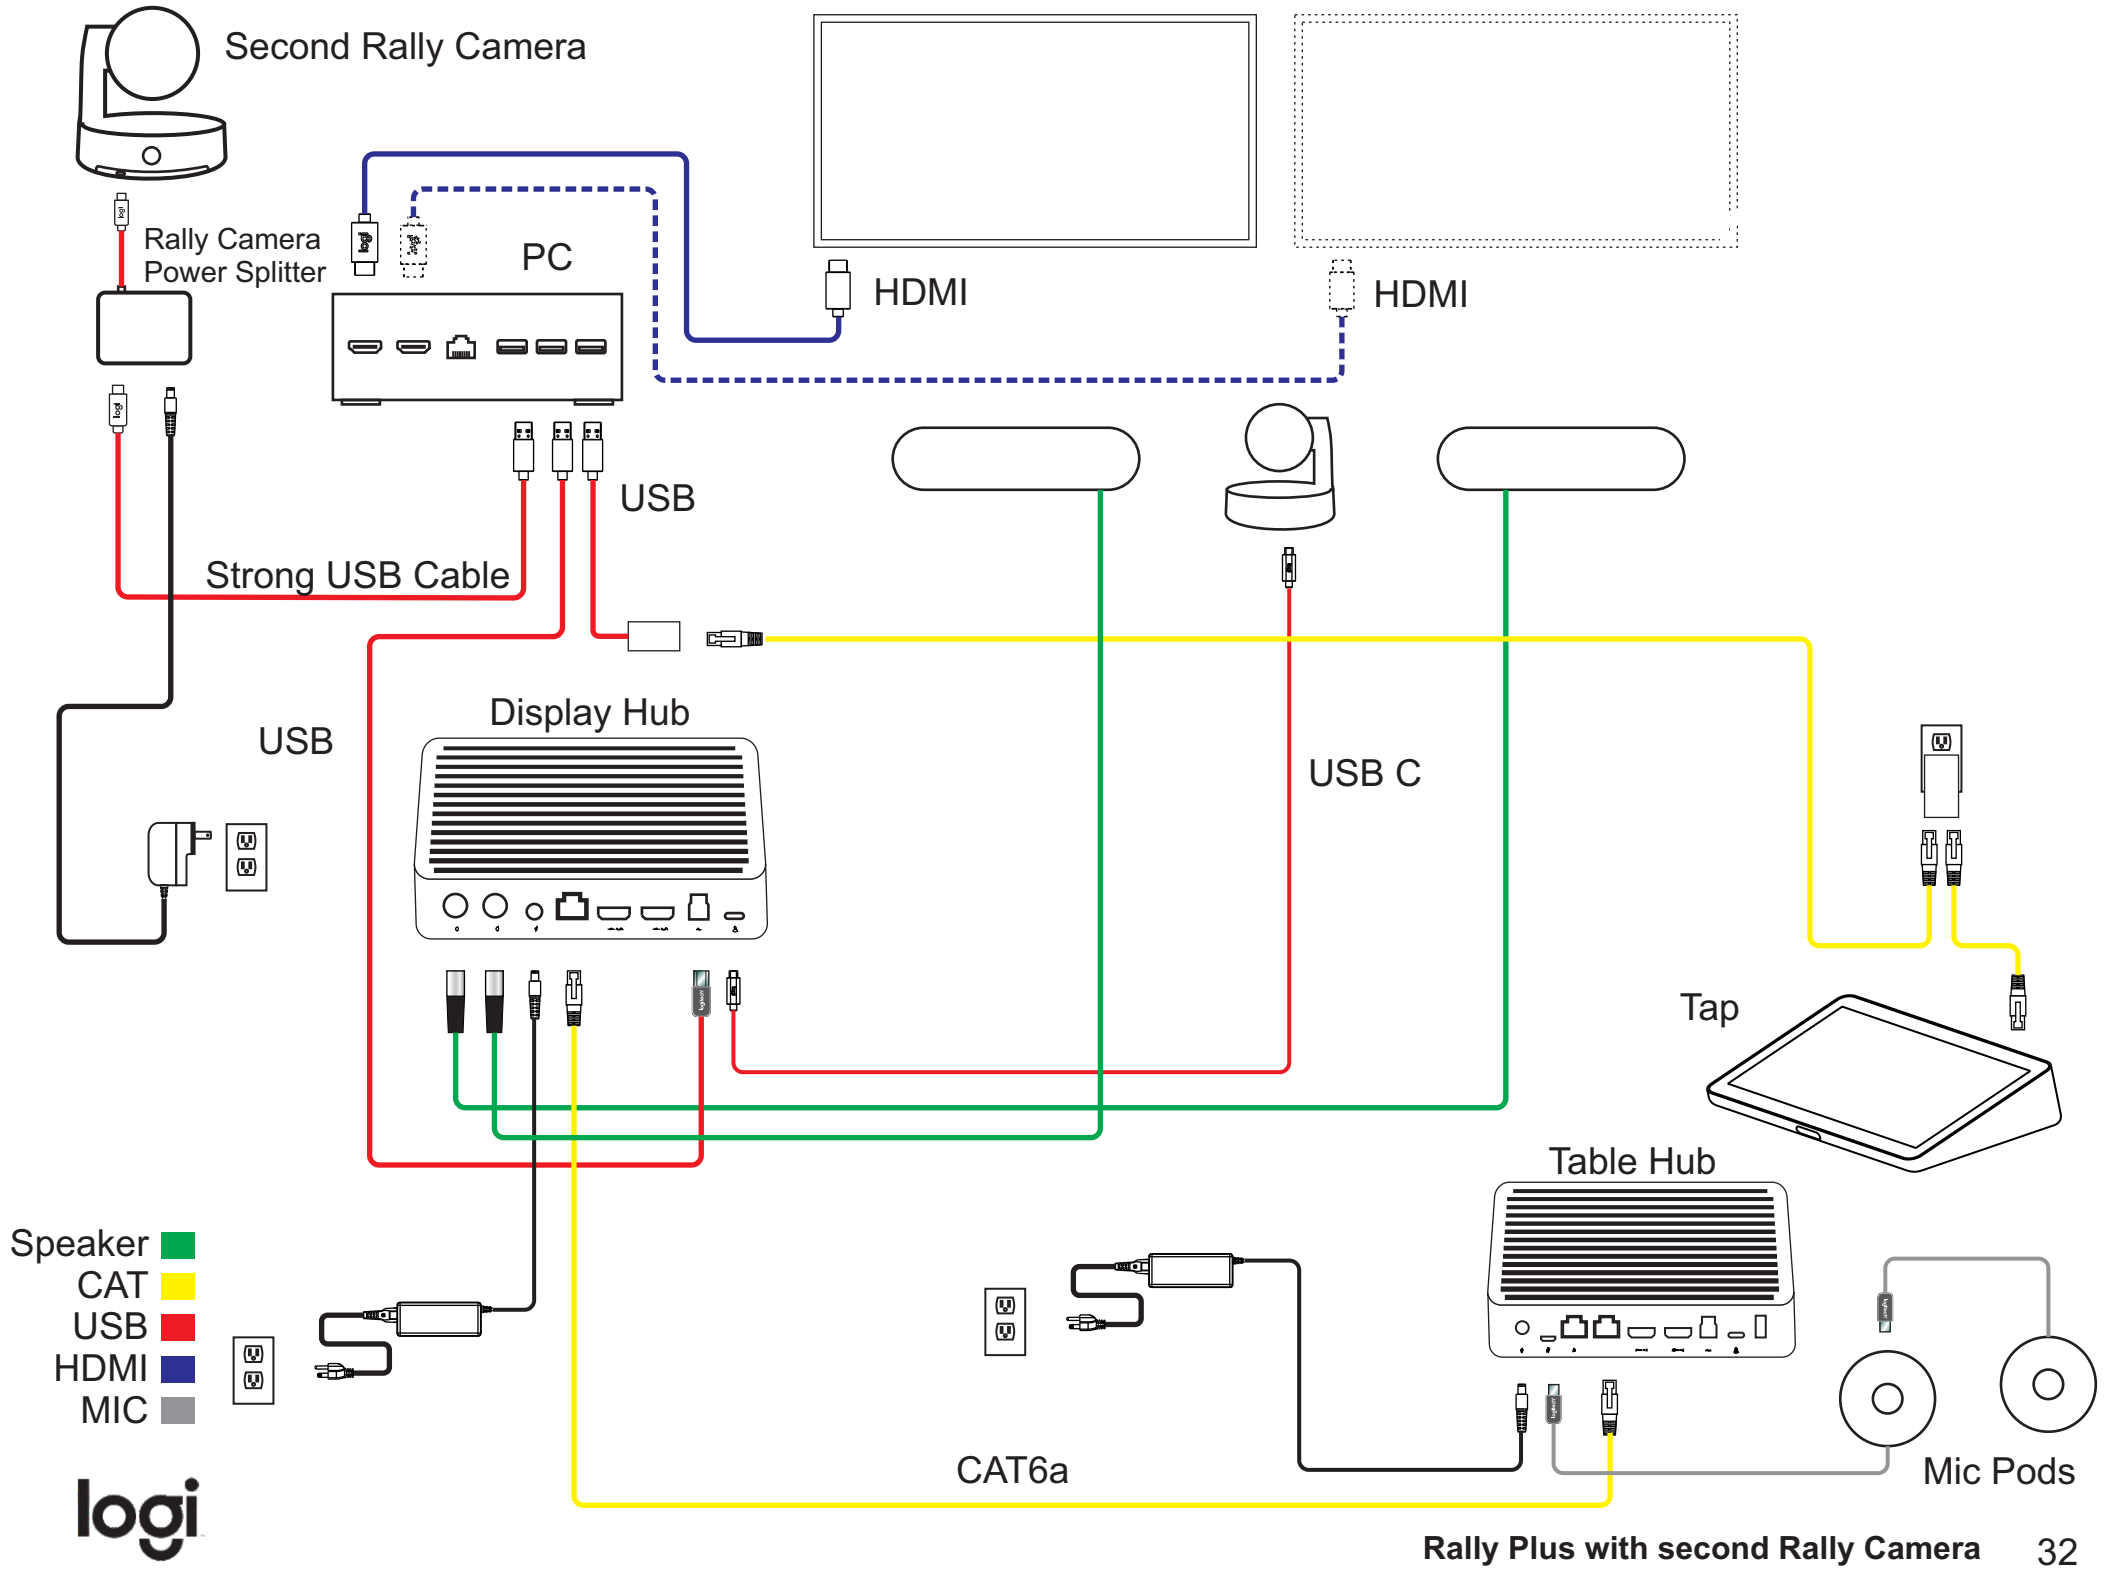
Second Rally Camera
Rally Camera
Power Splitter
PC
HDMI
HDMI
USB
Strong USB Cable
USB
Display Hub
USB C
Tap
Table Hub
Speaker
CAT
USB
HDMI
MIC
CAT6a
Mic Pods

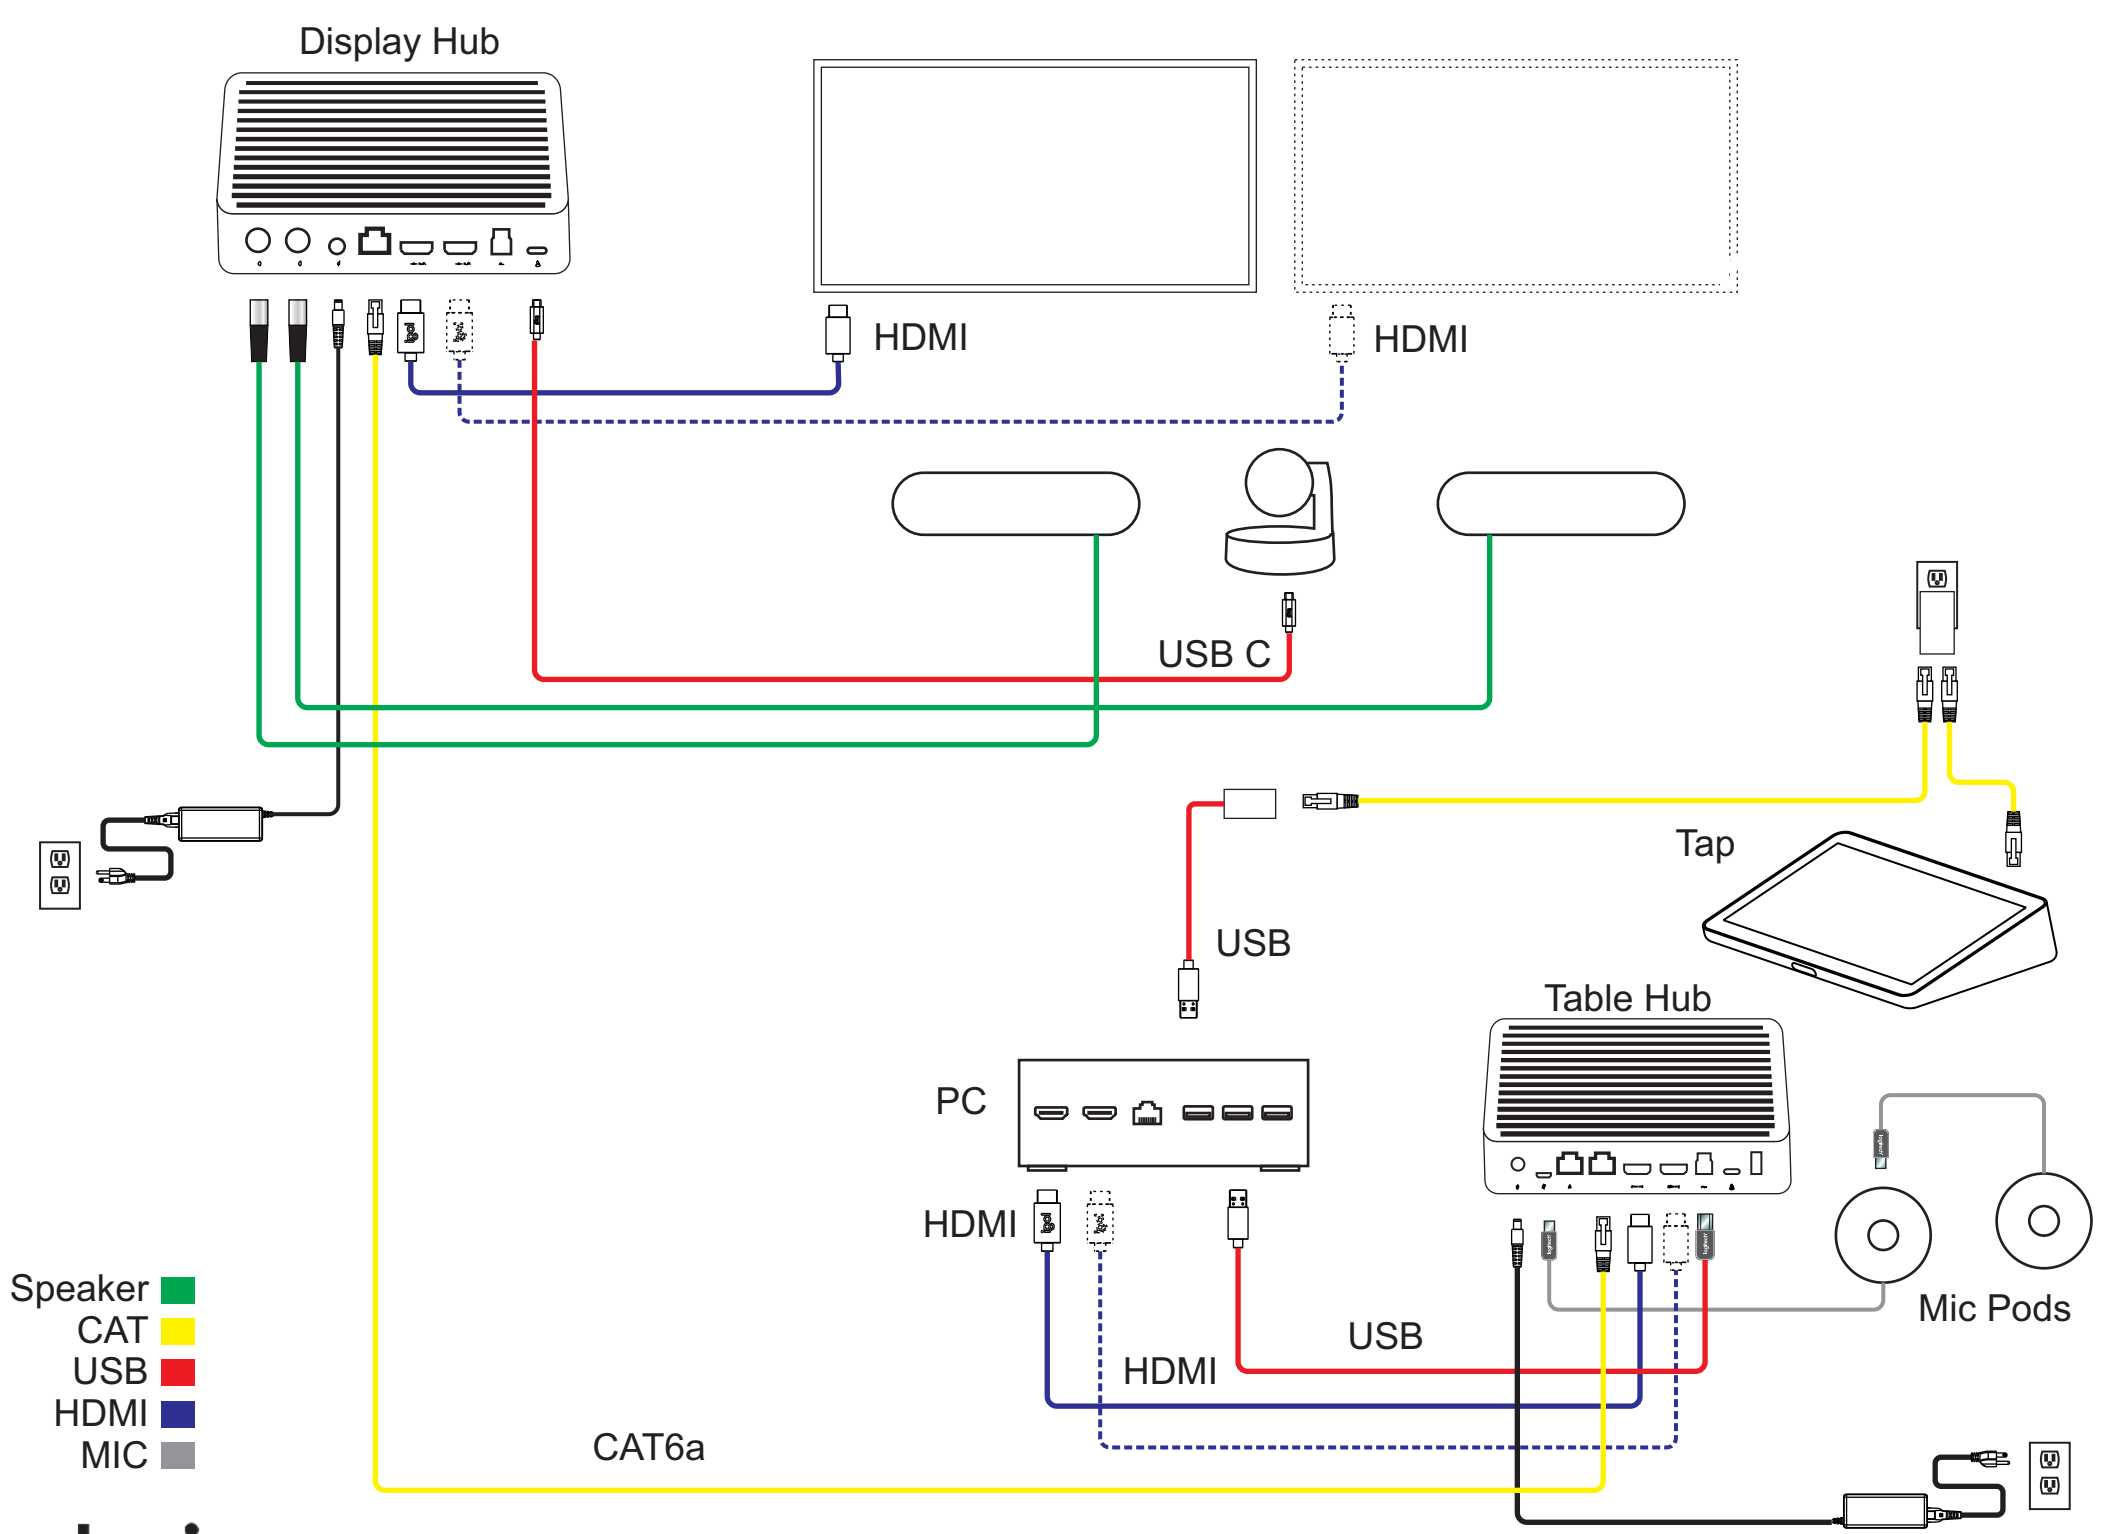

Rally Plus: compute at Table Hub. Up to 7 Mic Pod and 7 Mic Pod Hubs.

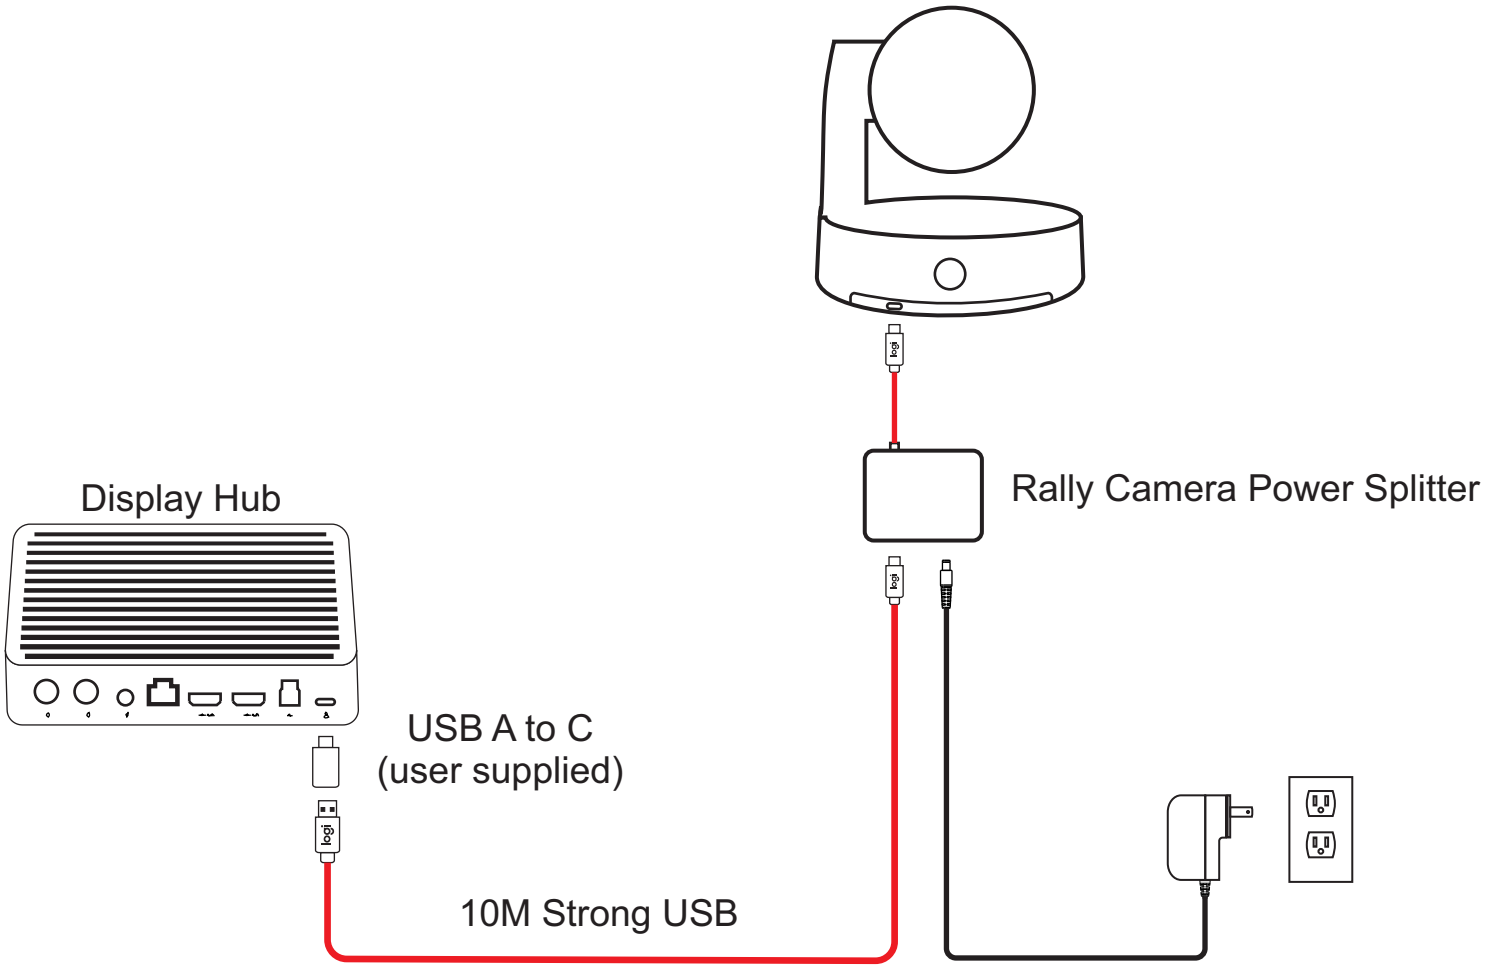


USB


Rally Plus: Extending the USB cable between the camera and Display Hub
Please note: this configuration does not work with Swytch

SWYTCH


Table of Contents

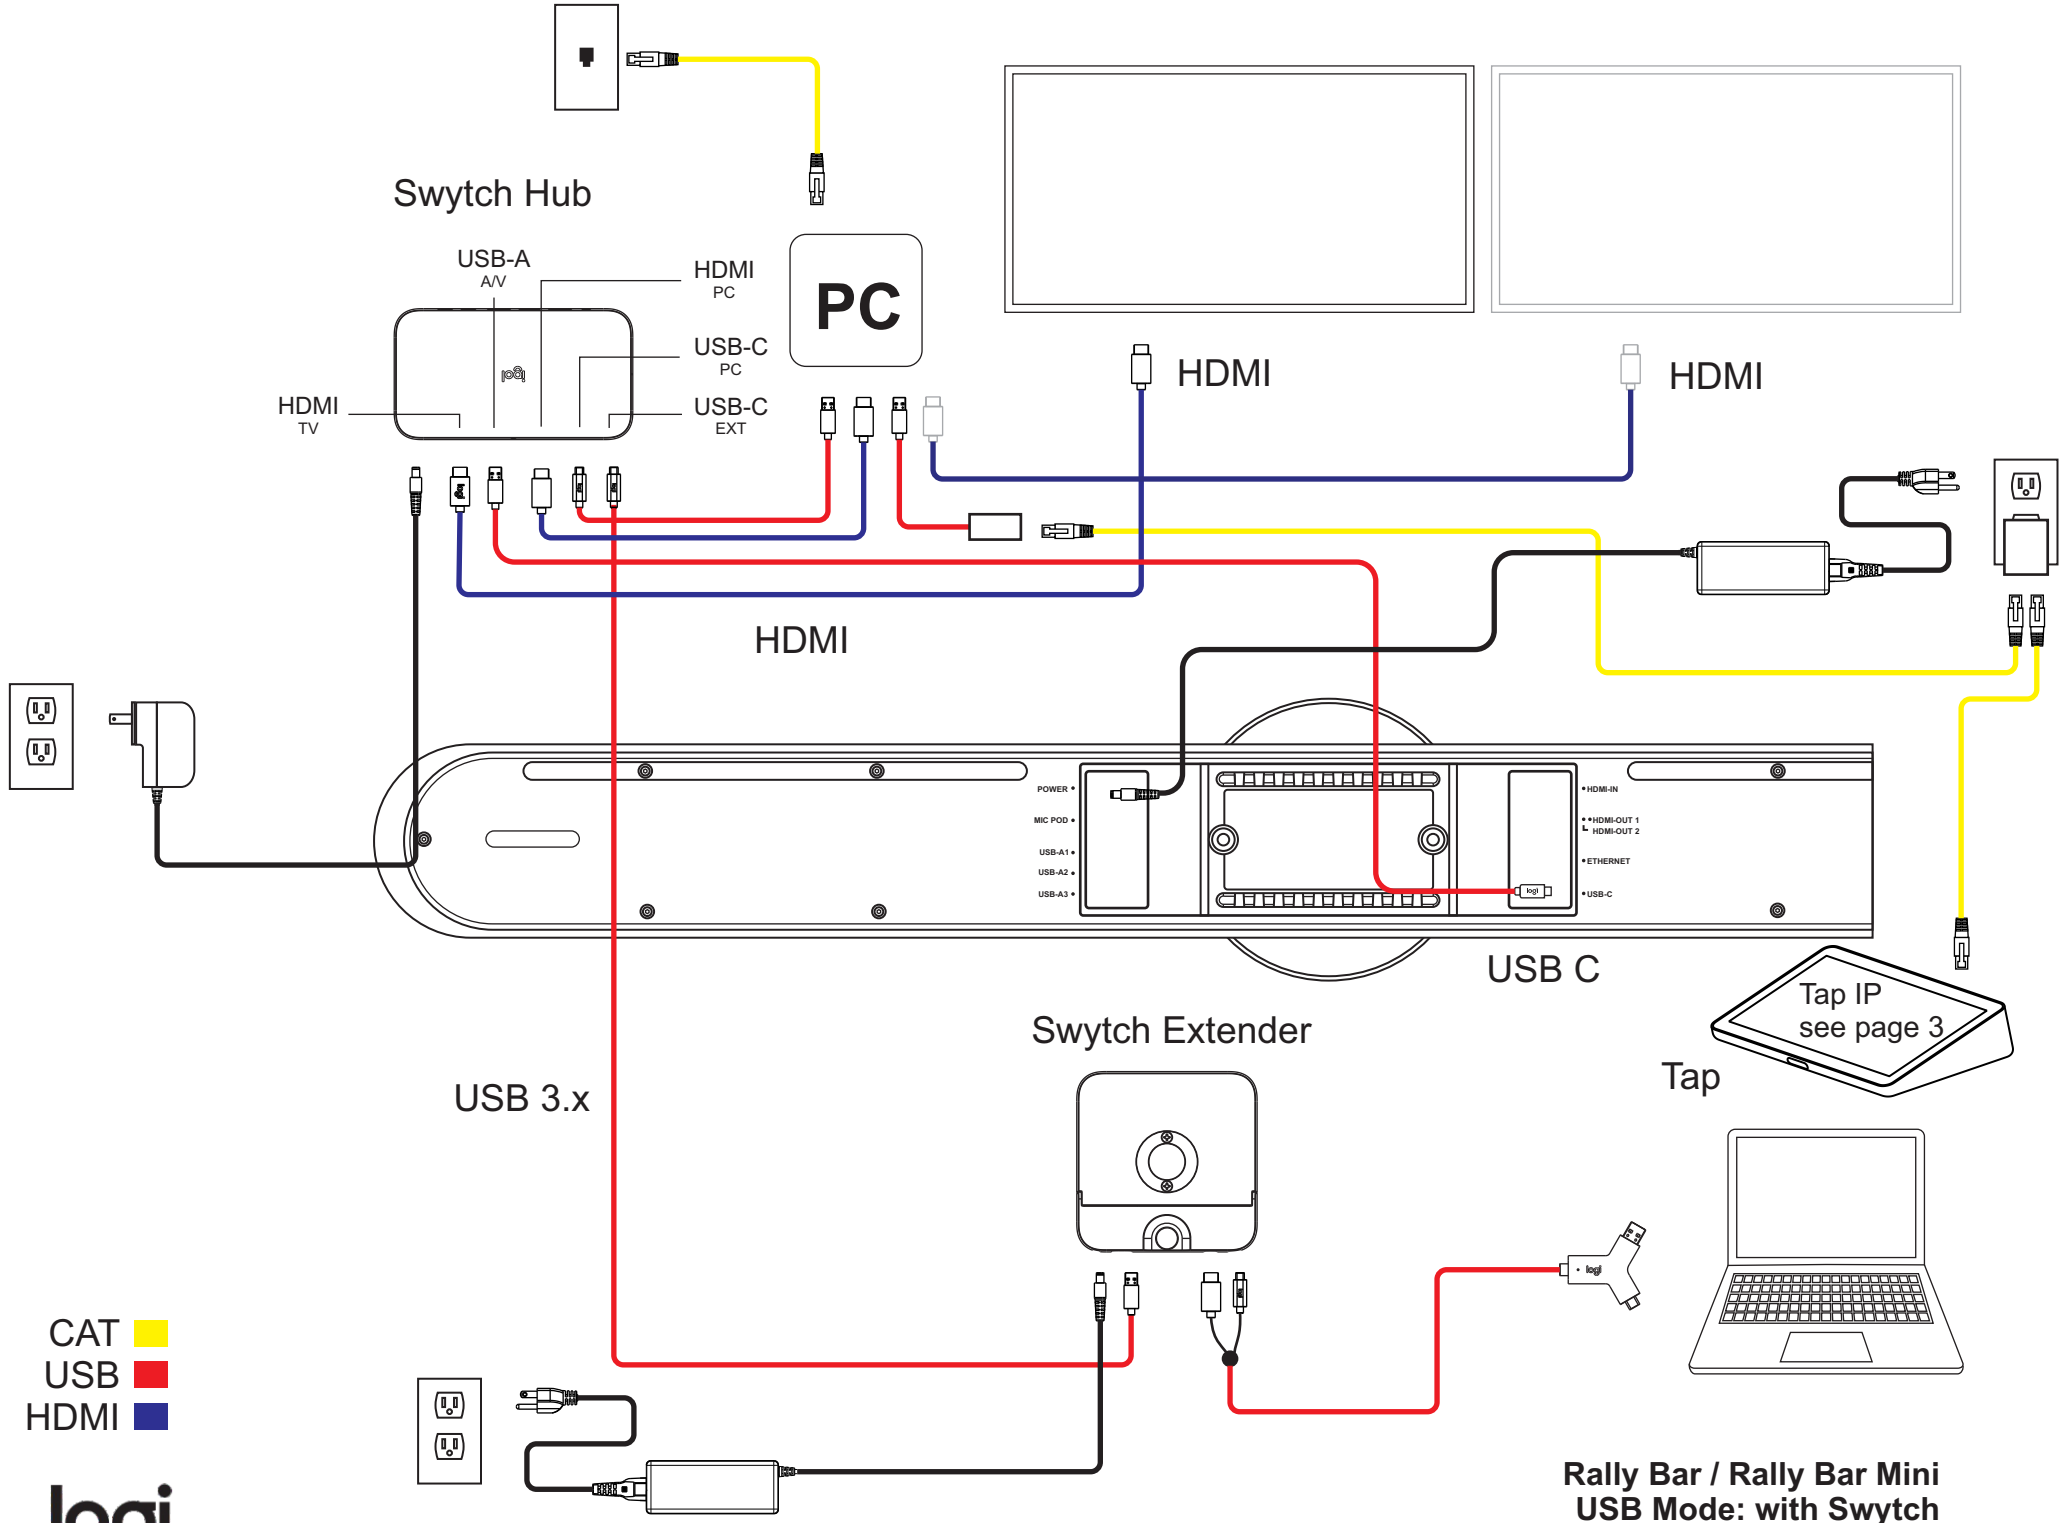


Rally Bar / Rally Bar Mini
USB Mode: with Swytch

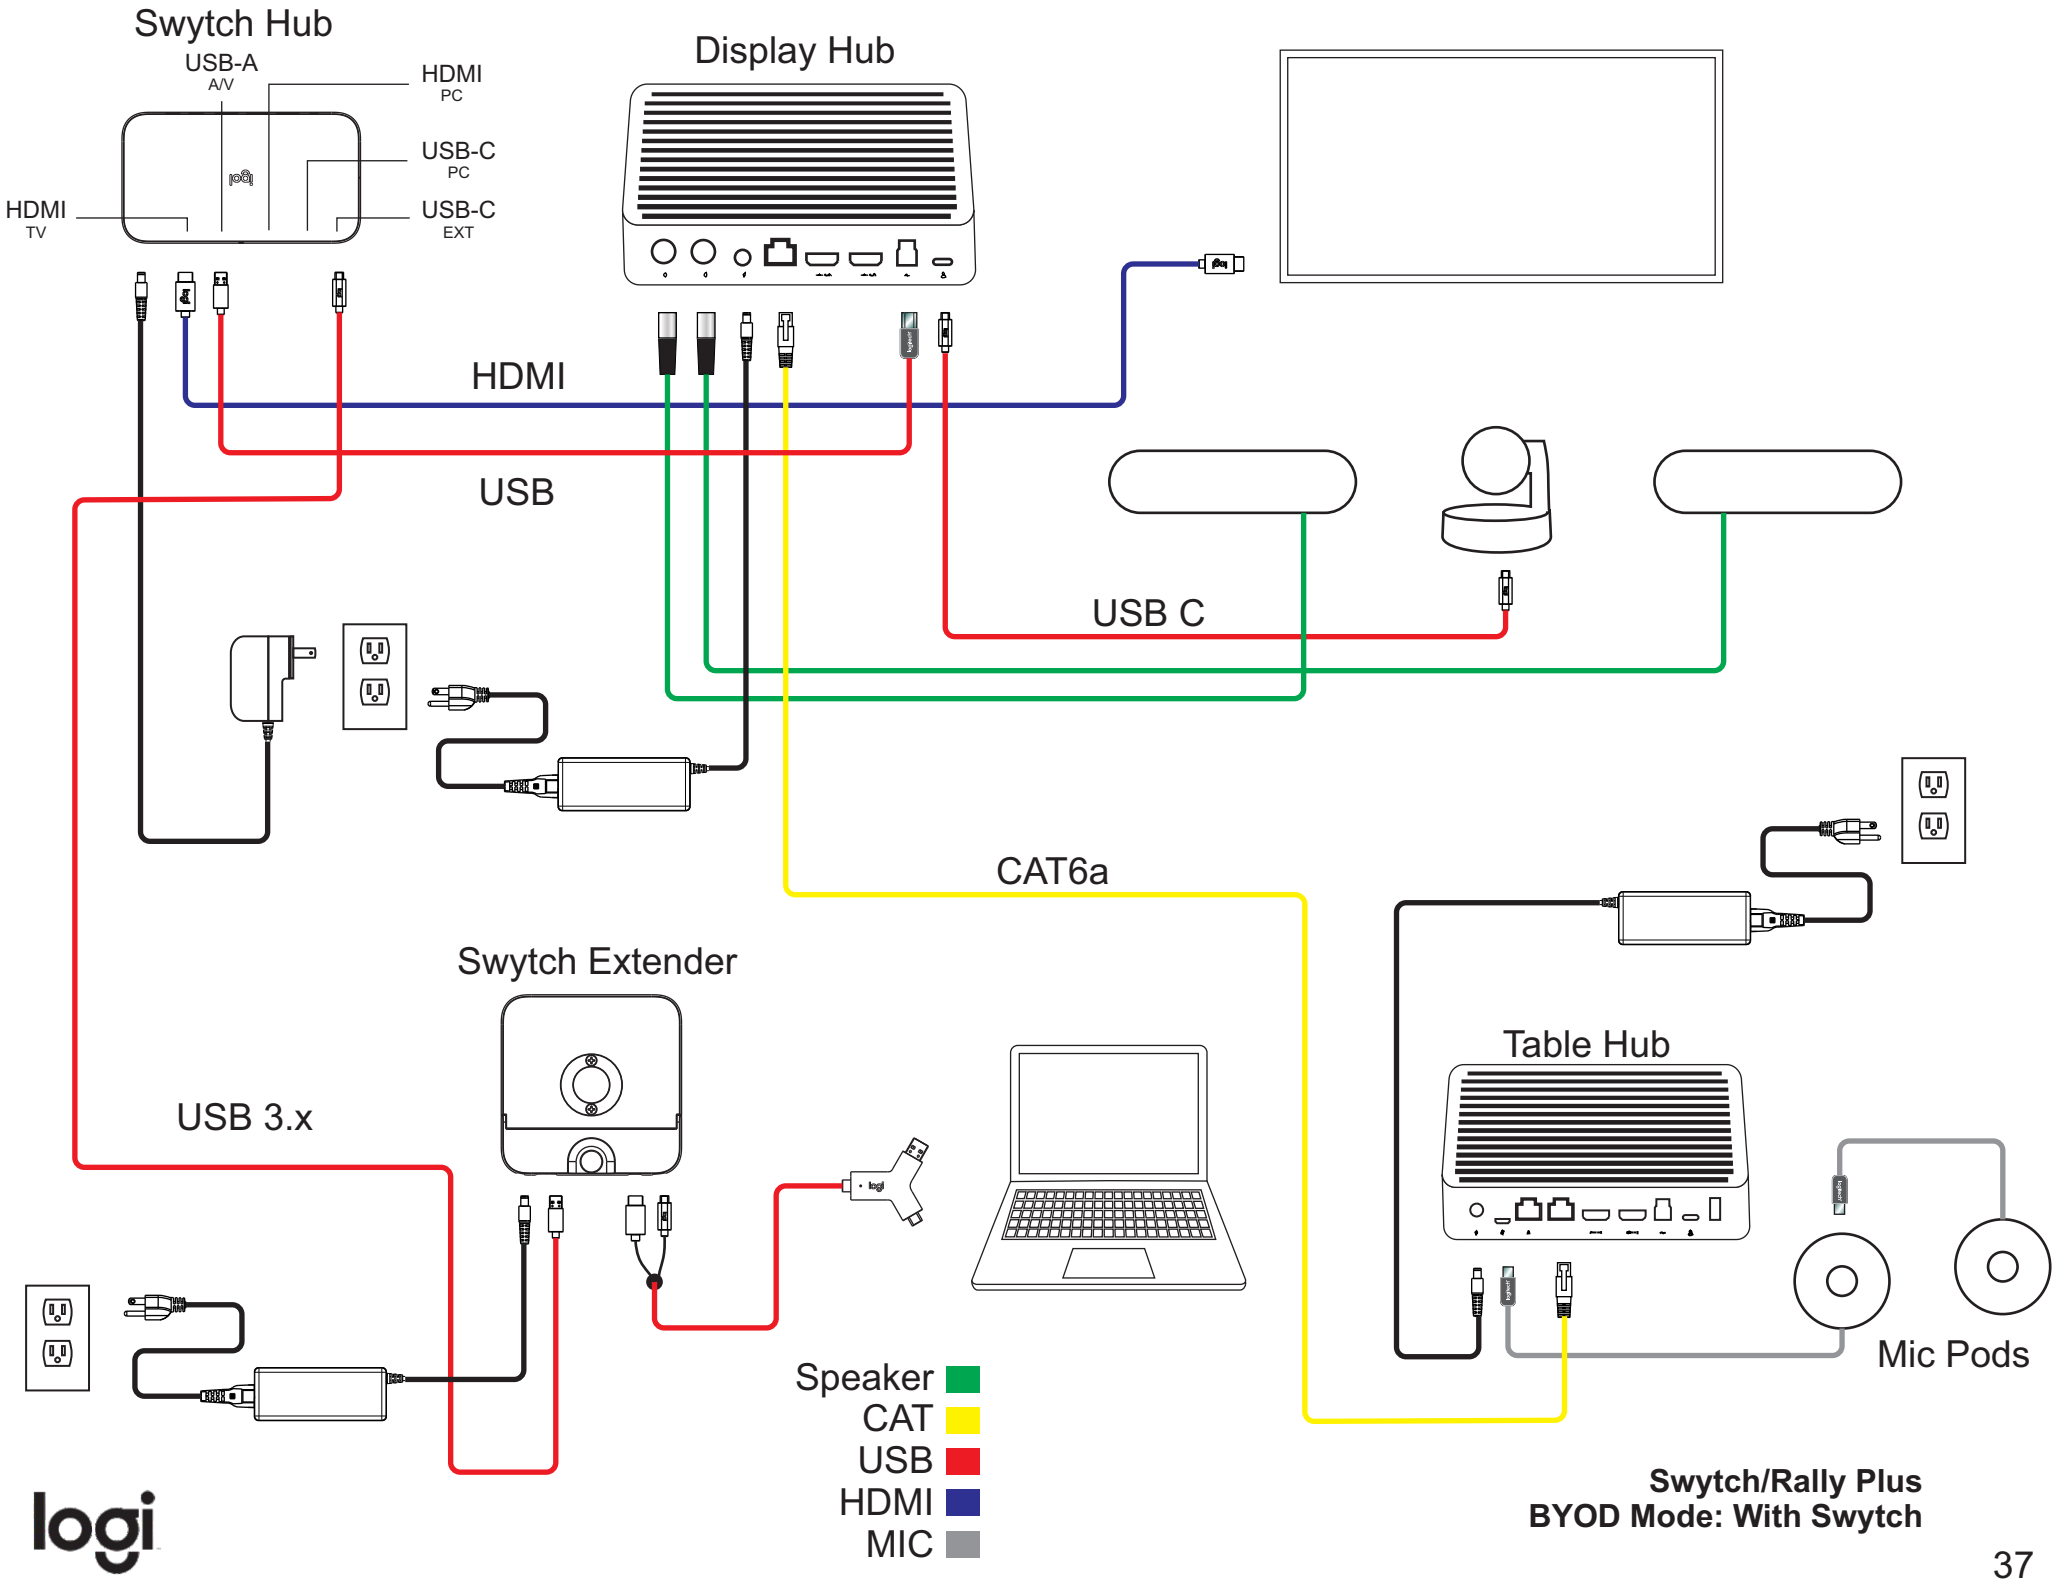


Swytch/Rally Plus
BYOD Mode: With Swytch

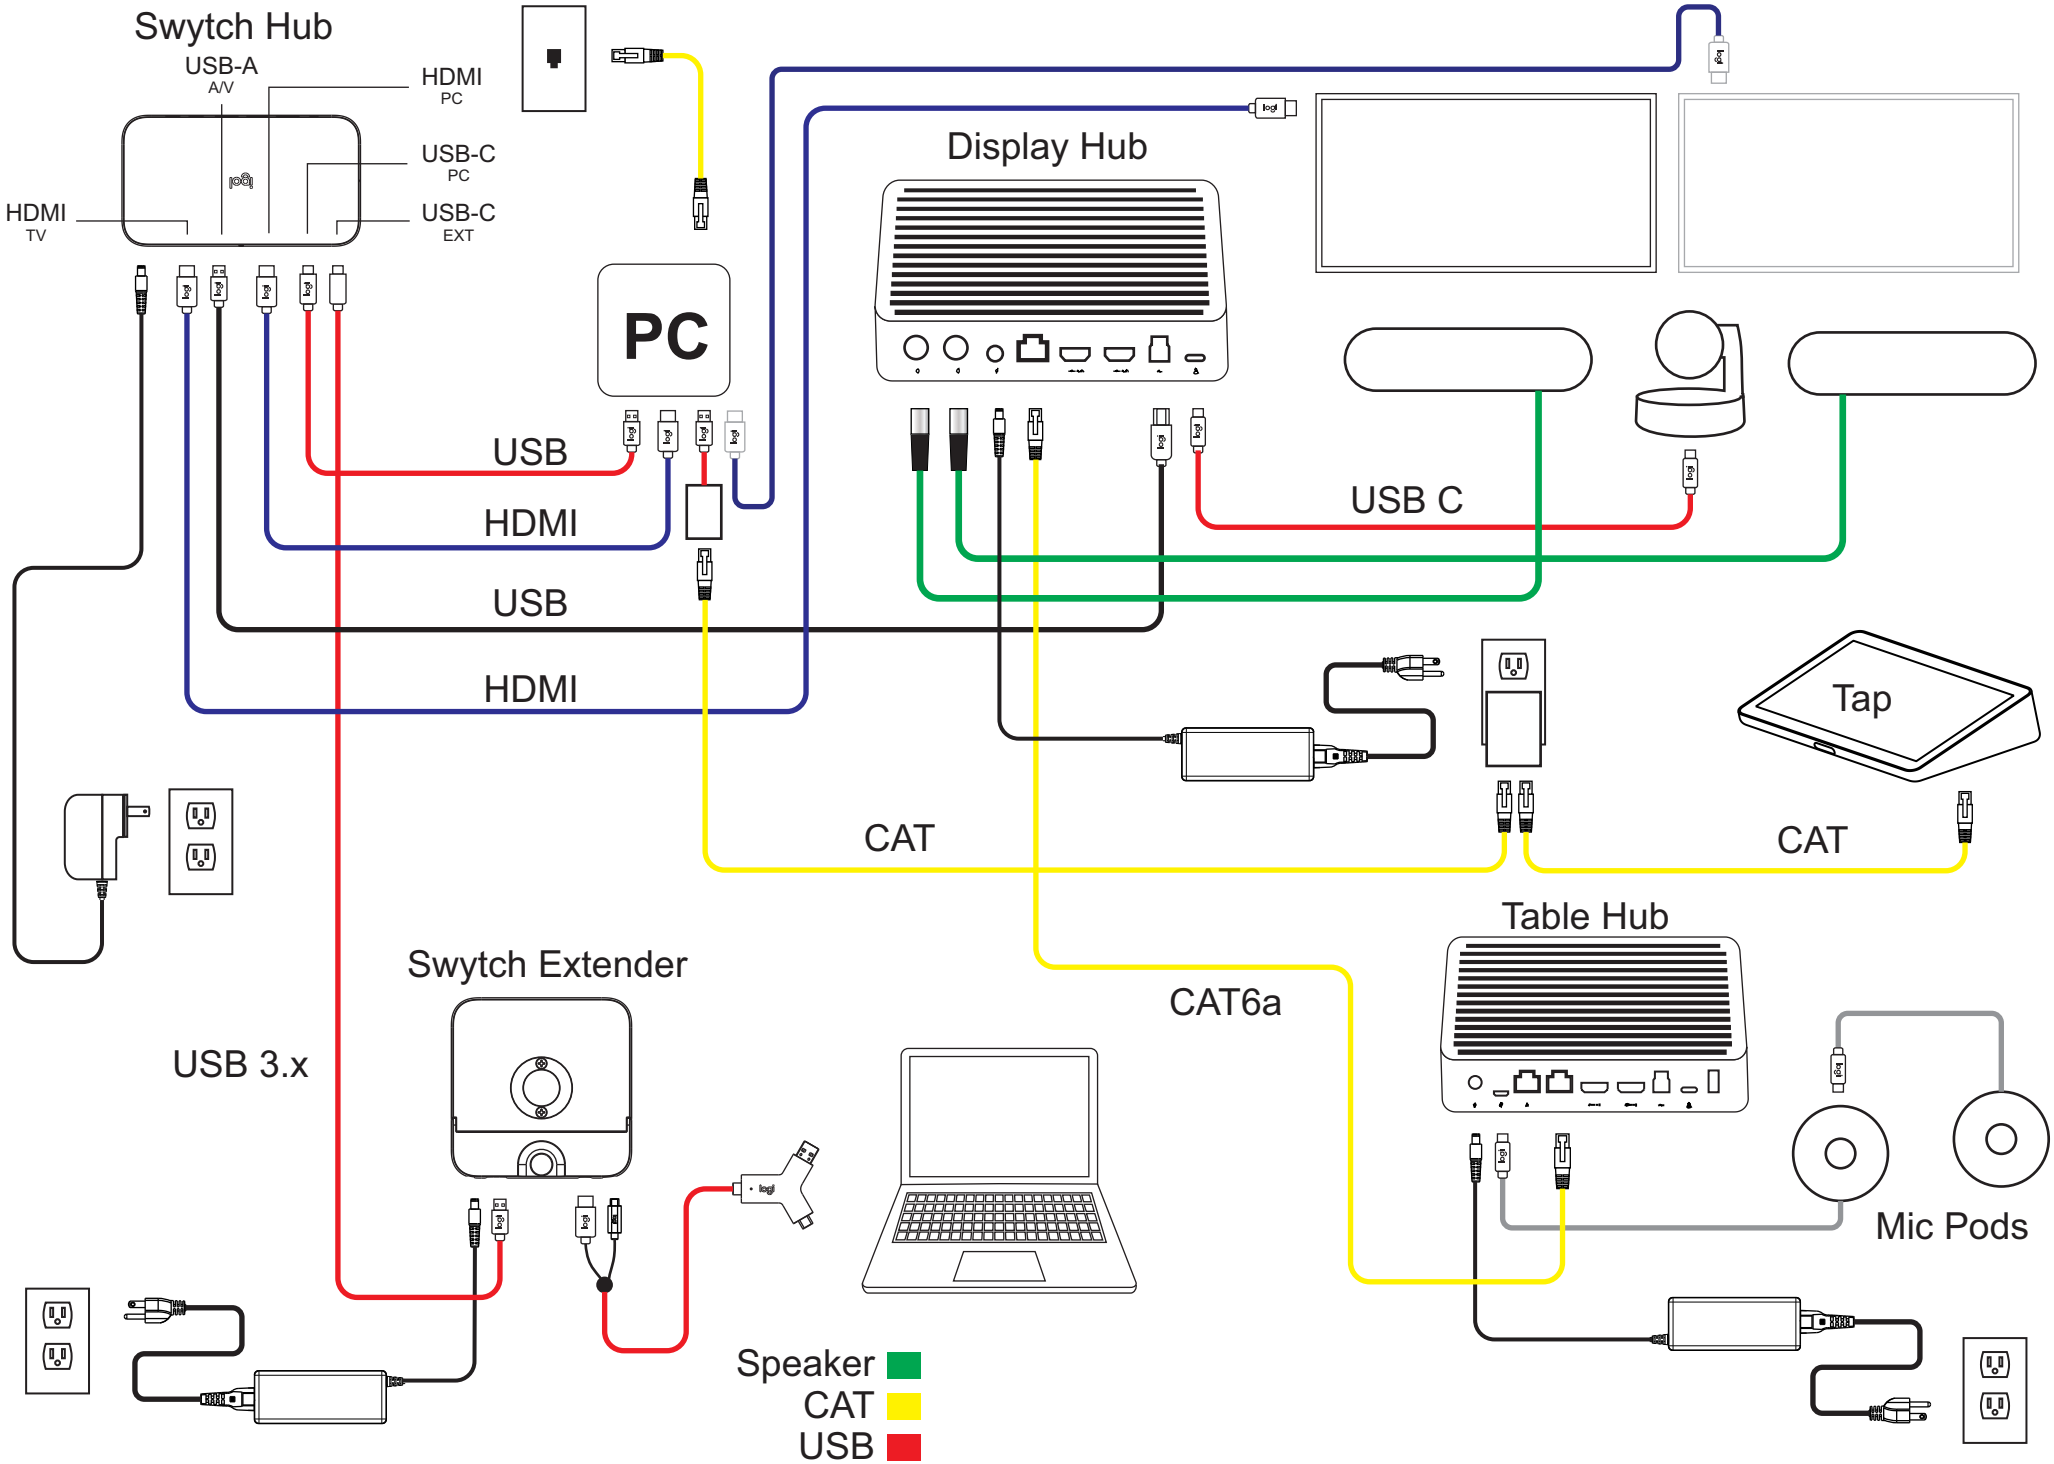


Swytch/Rally Plus
USB Mode: With Swytch

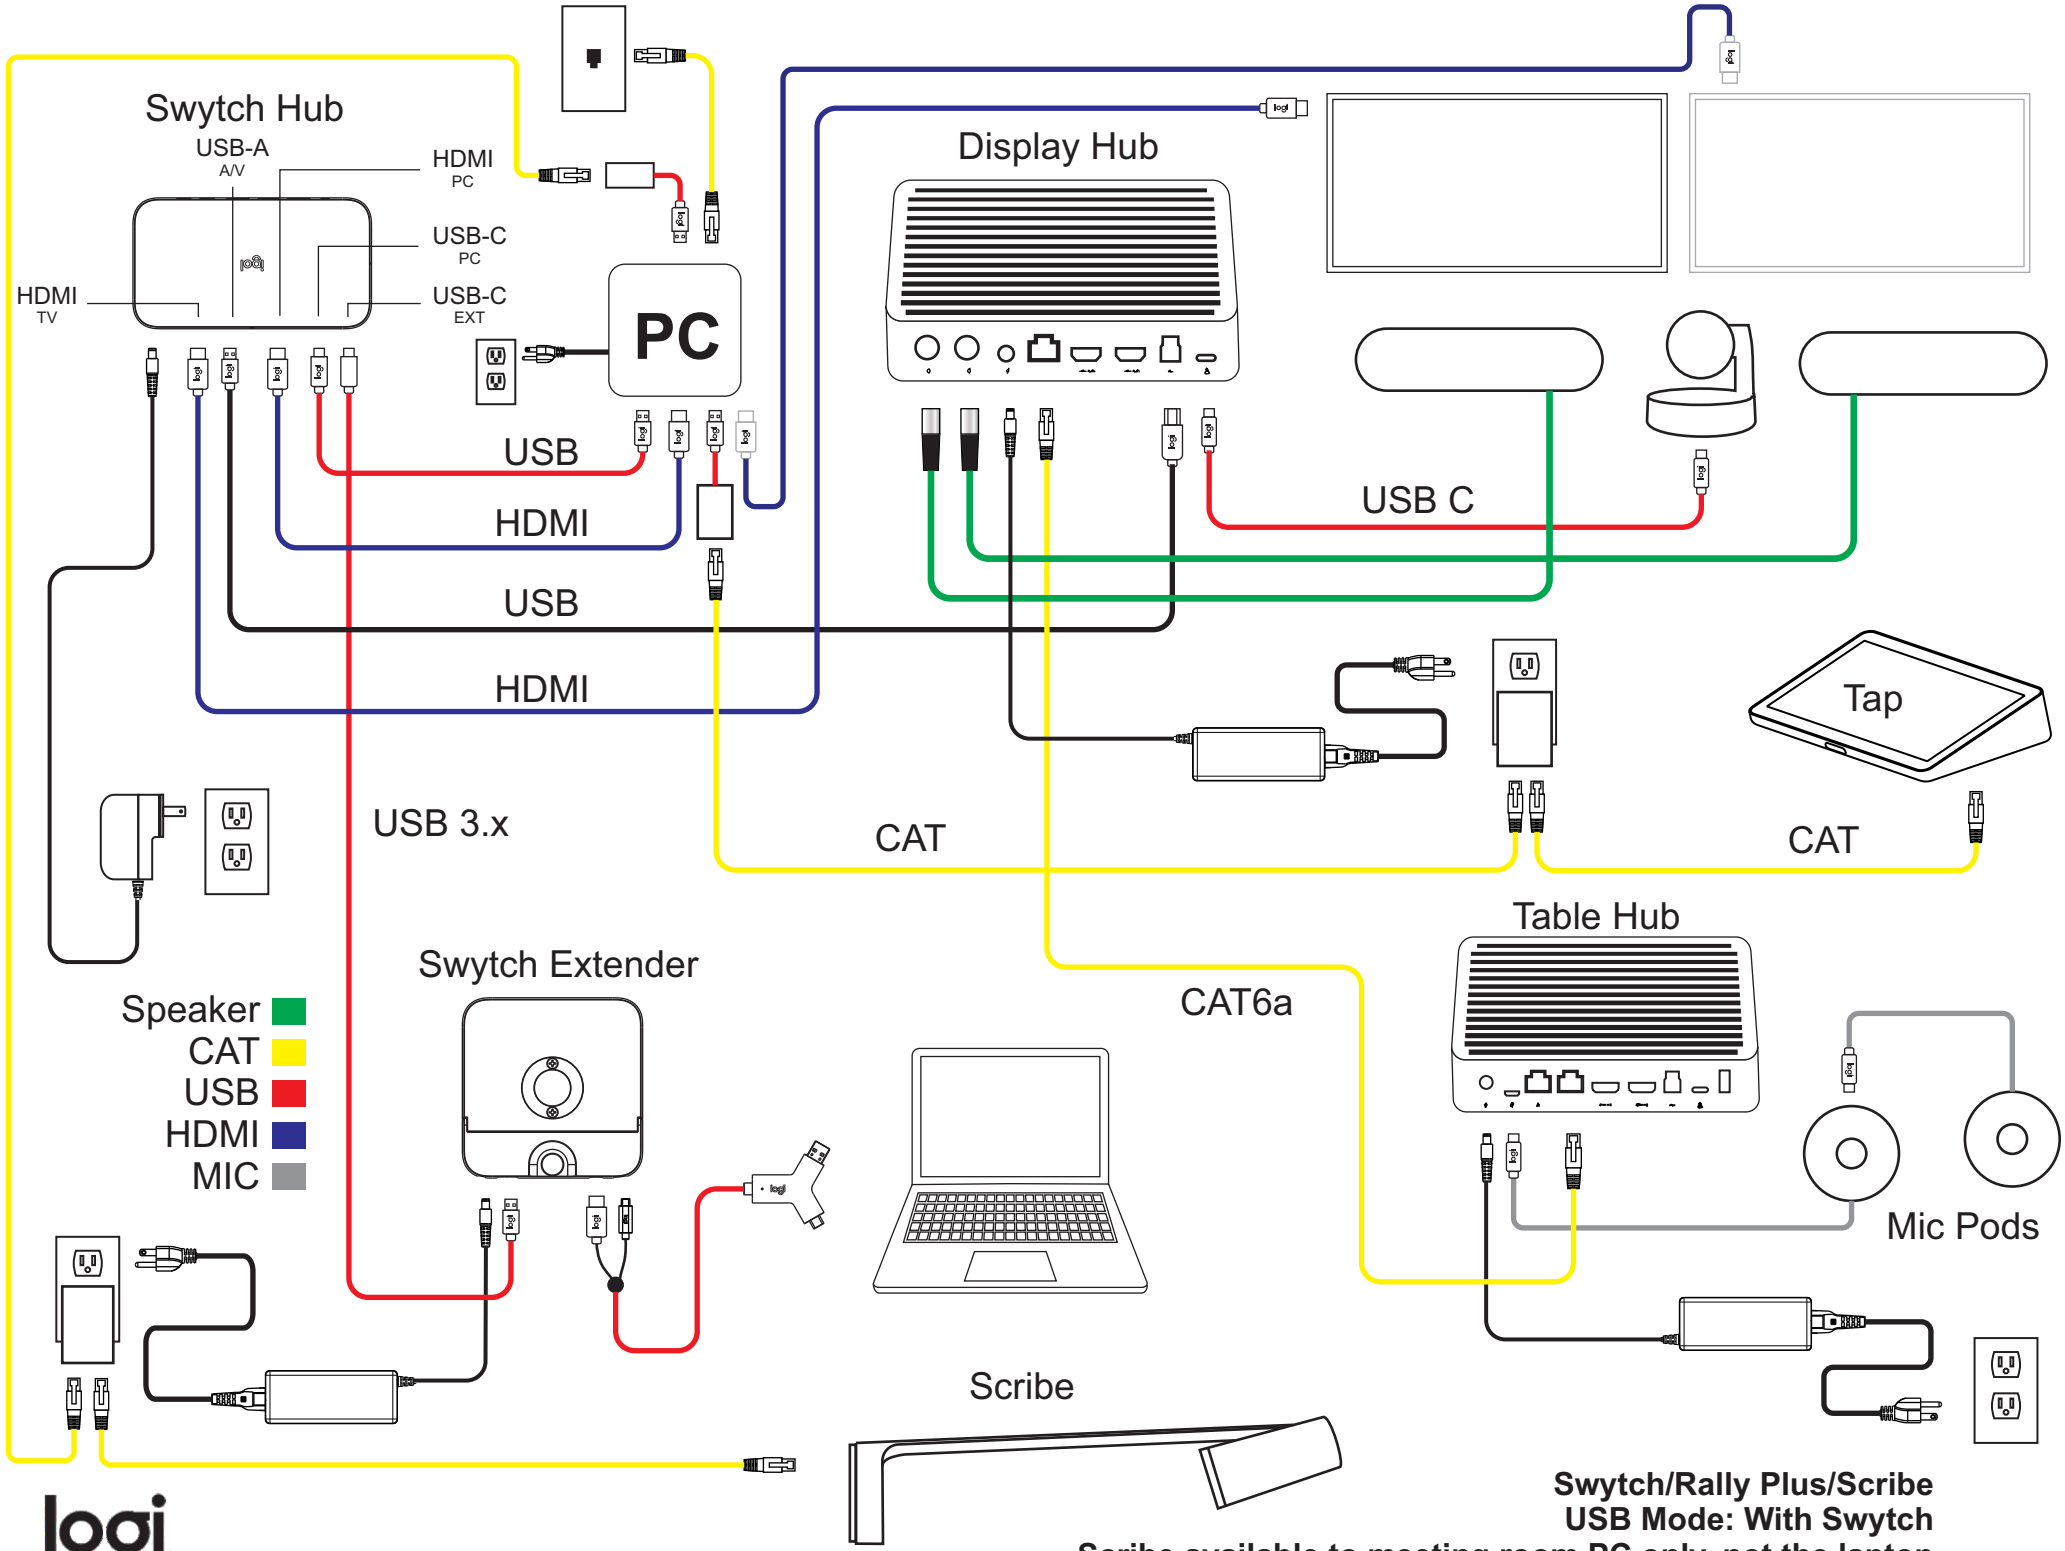


Swytch/Rally Plus/Scribe
USB Mode: With Swytch
Scribe available to meeting room PC only, not the laptop

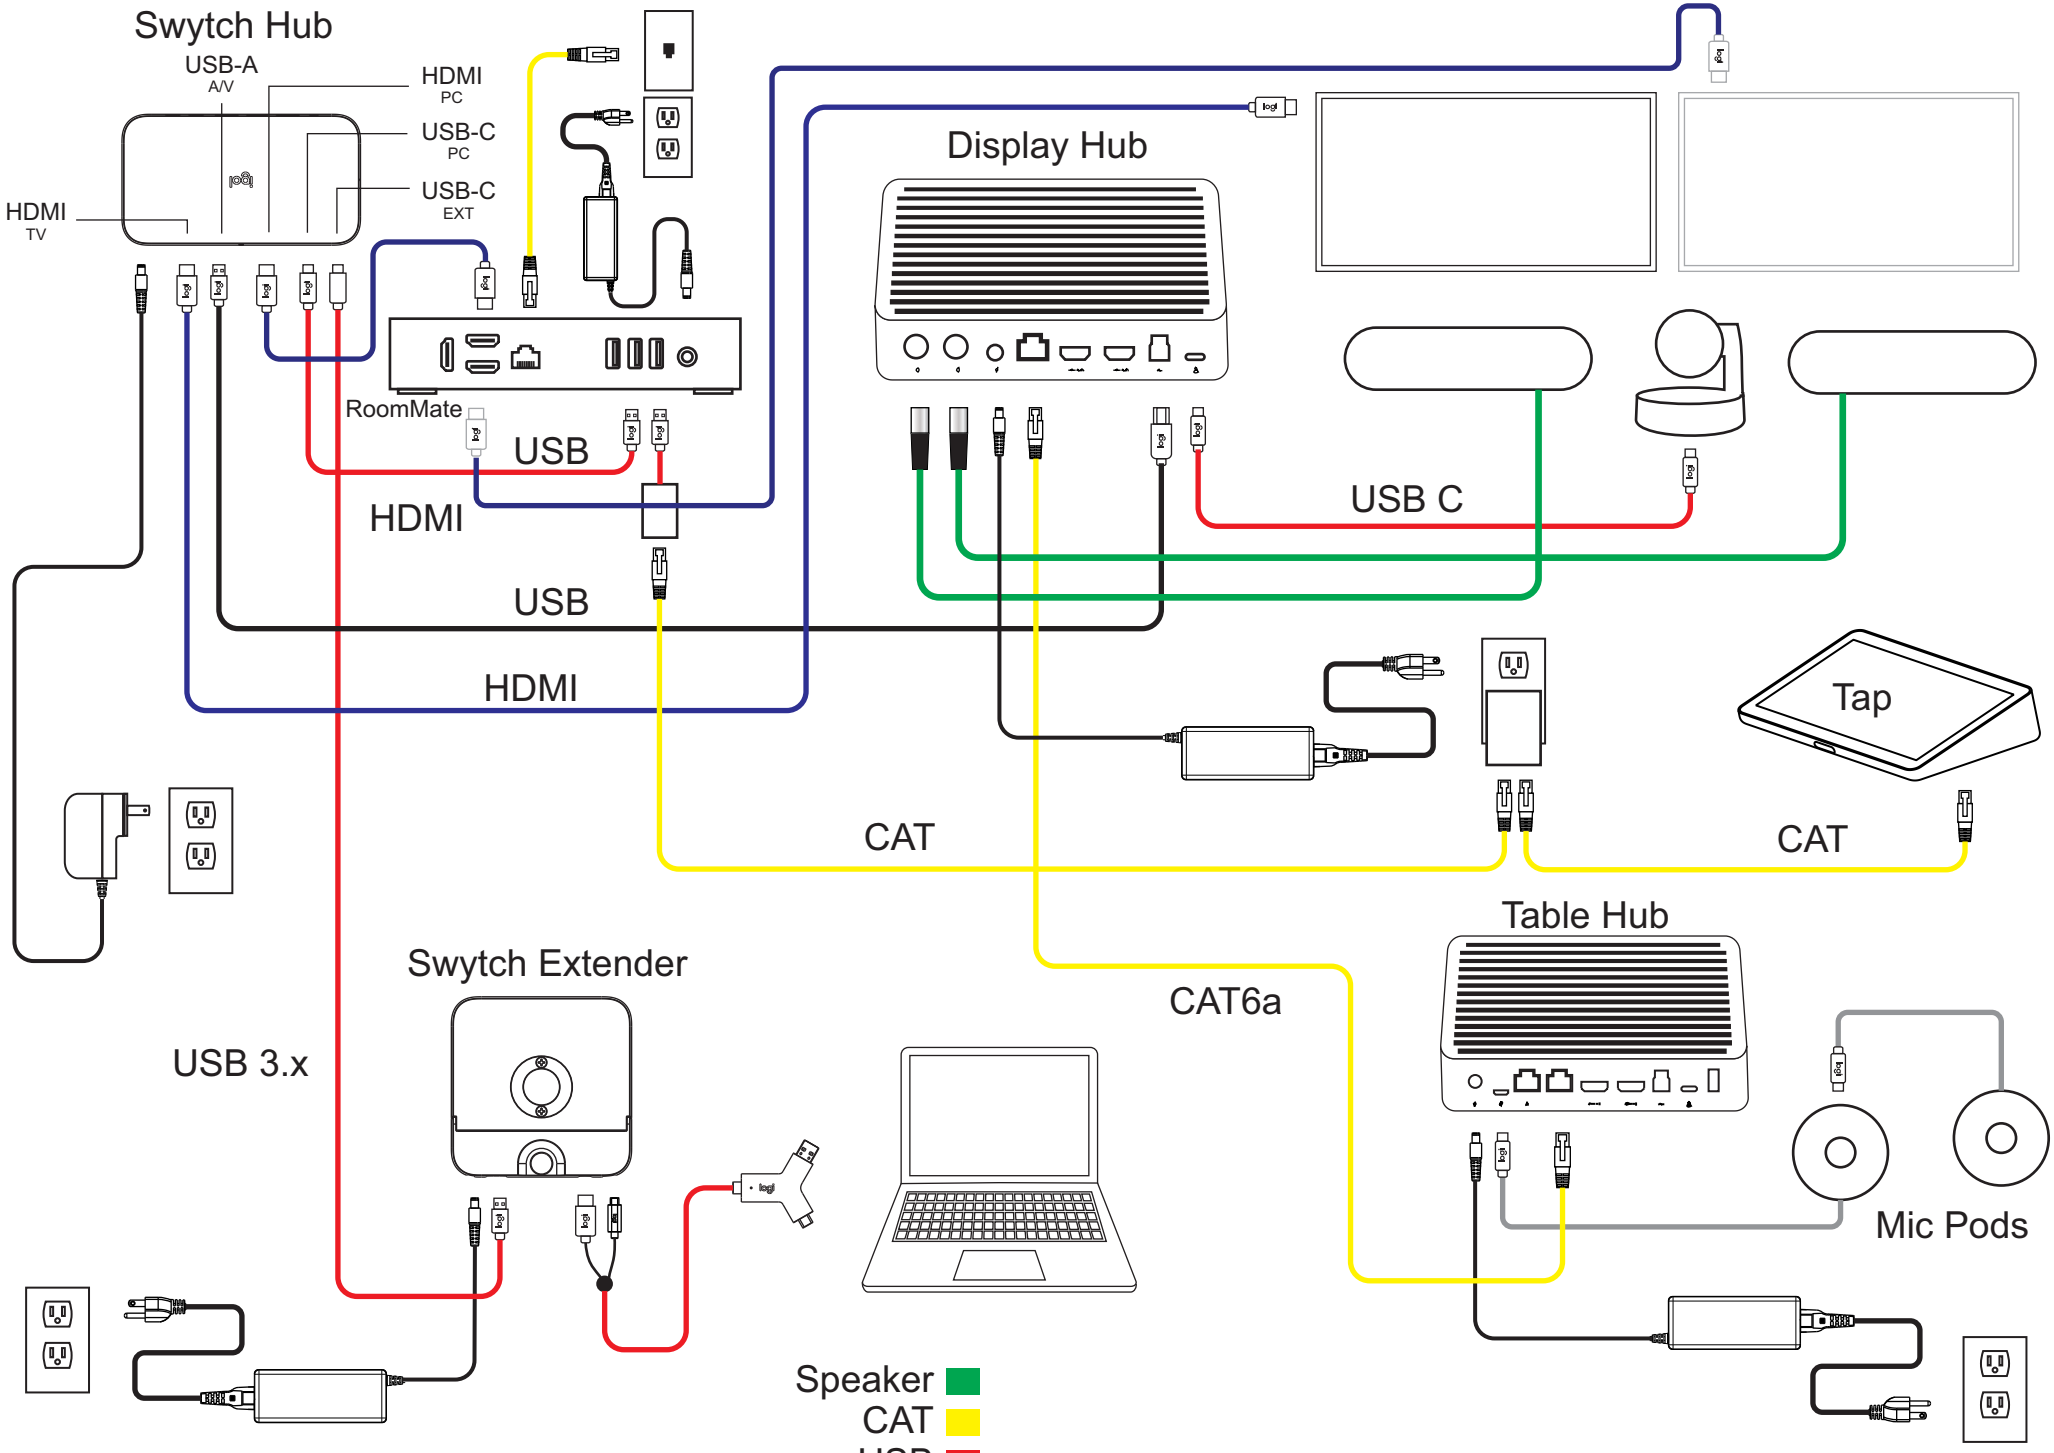


RoomMate/Swytch/Rally Plus
Appliance Mode: With Swytch

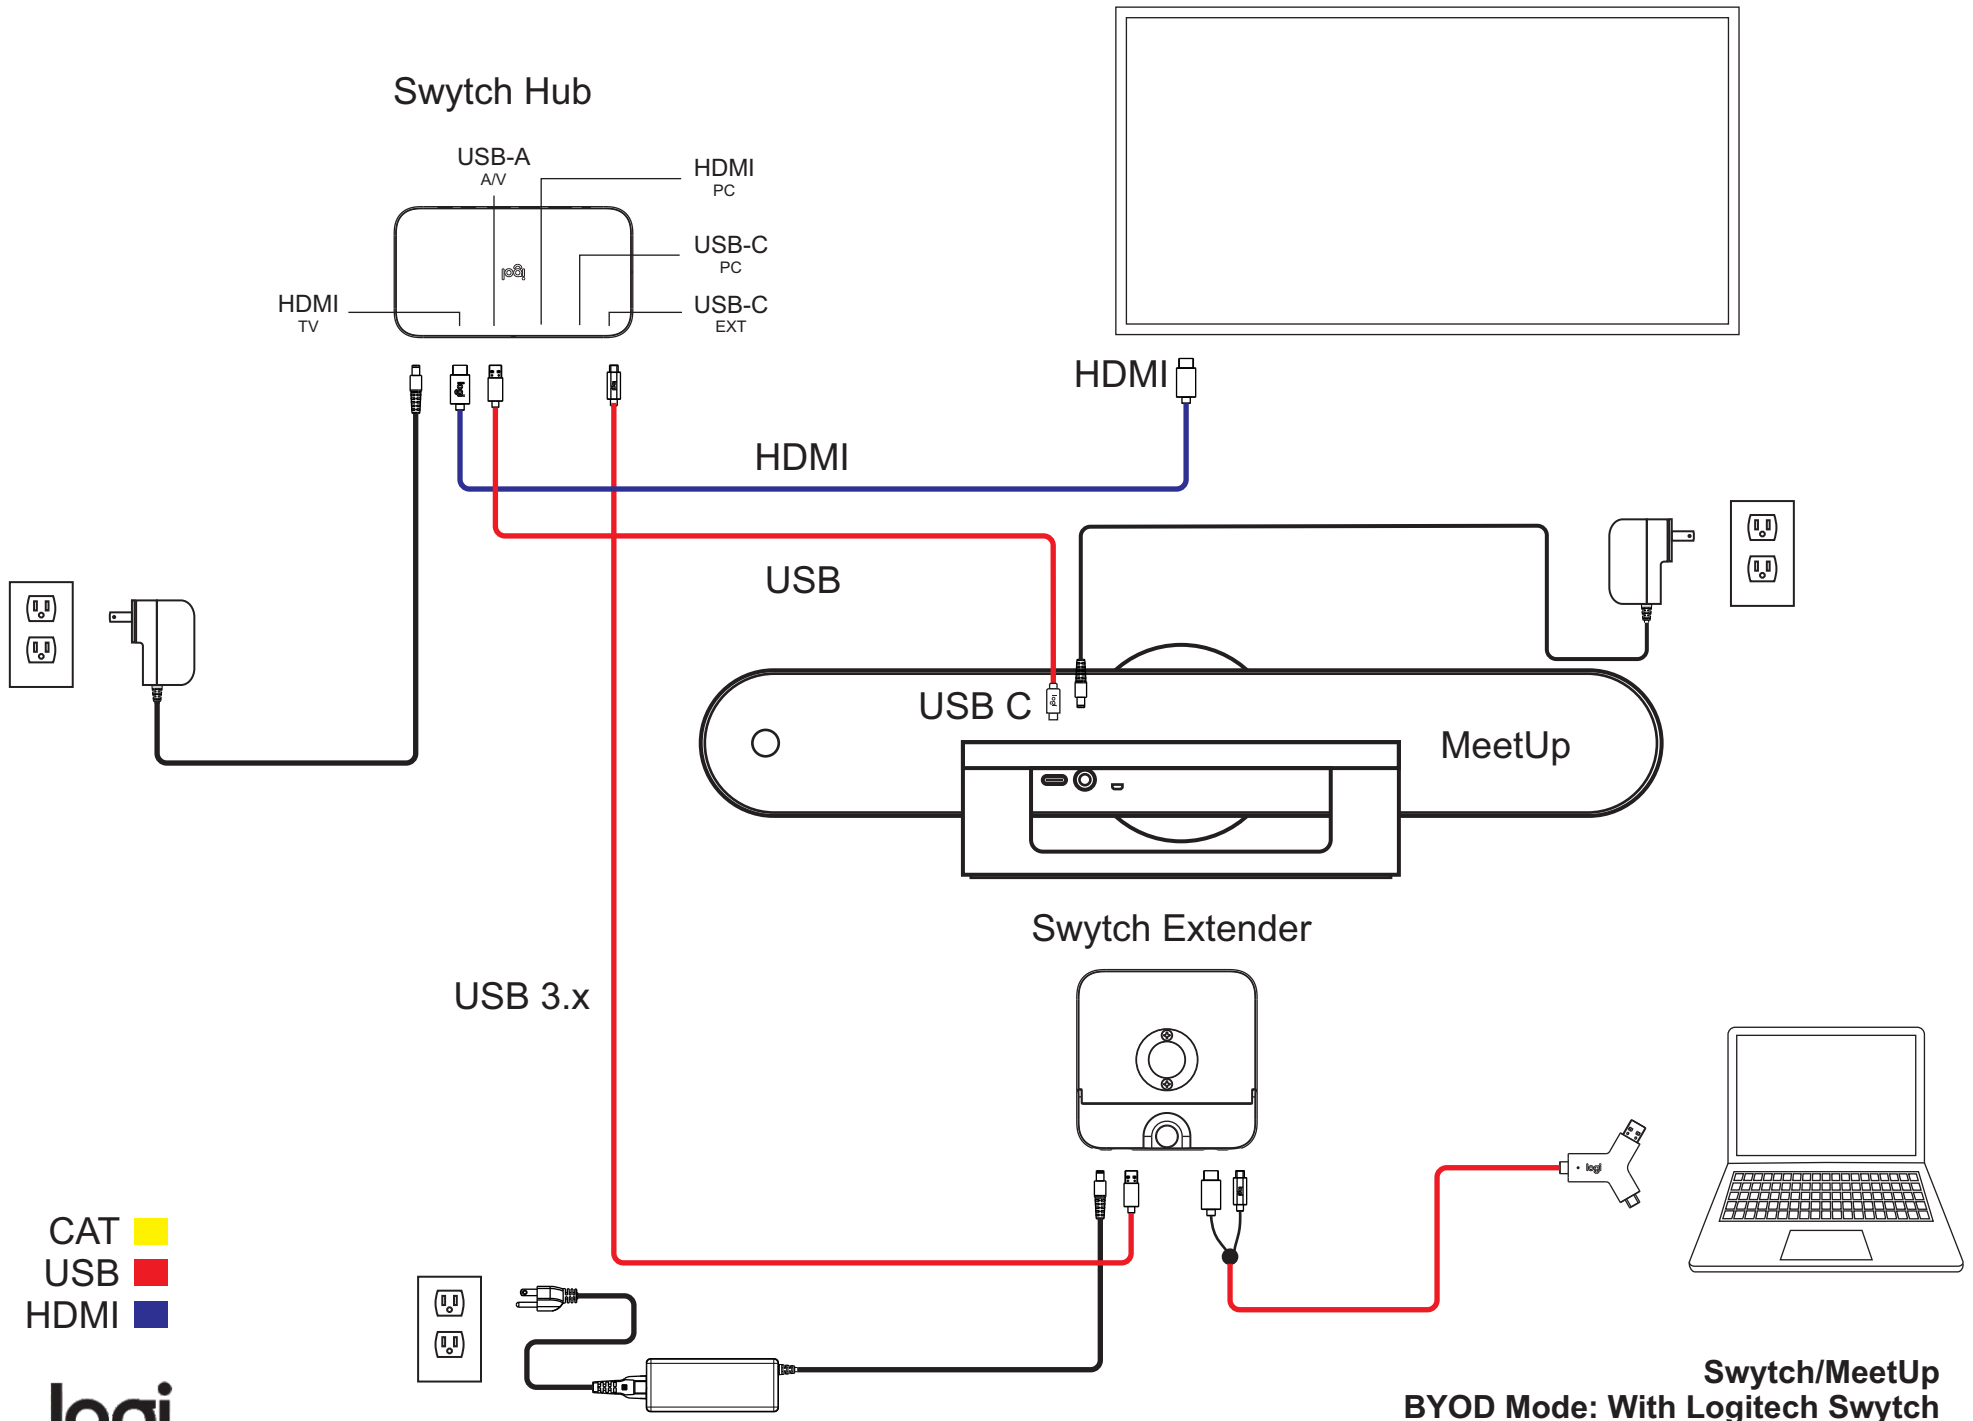


Swytch/MeetUp
BYOD Mode: With Logitech Swytch

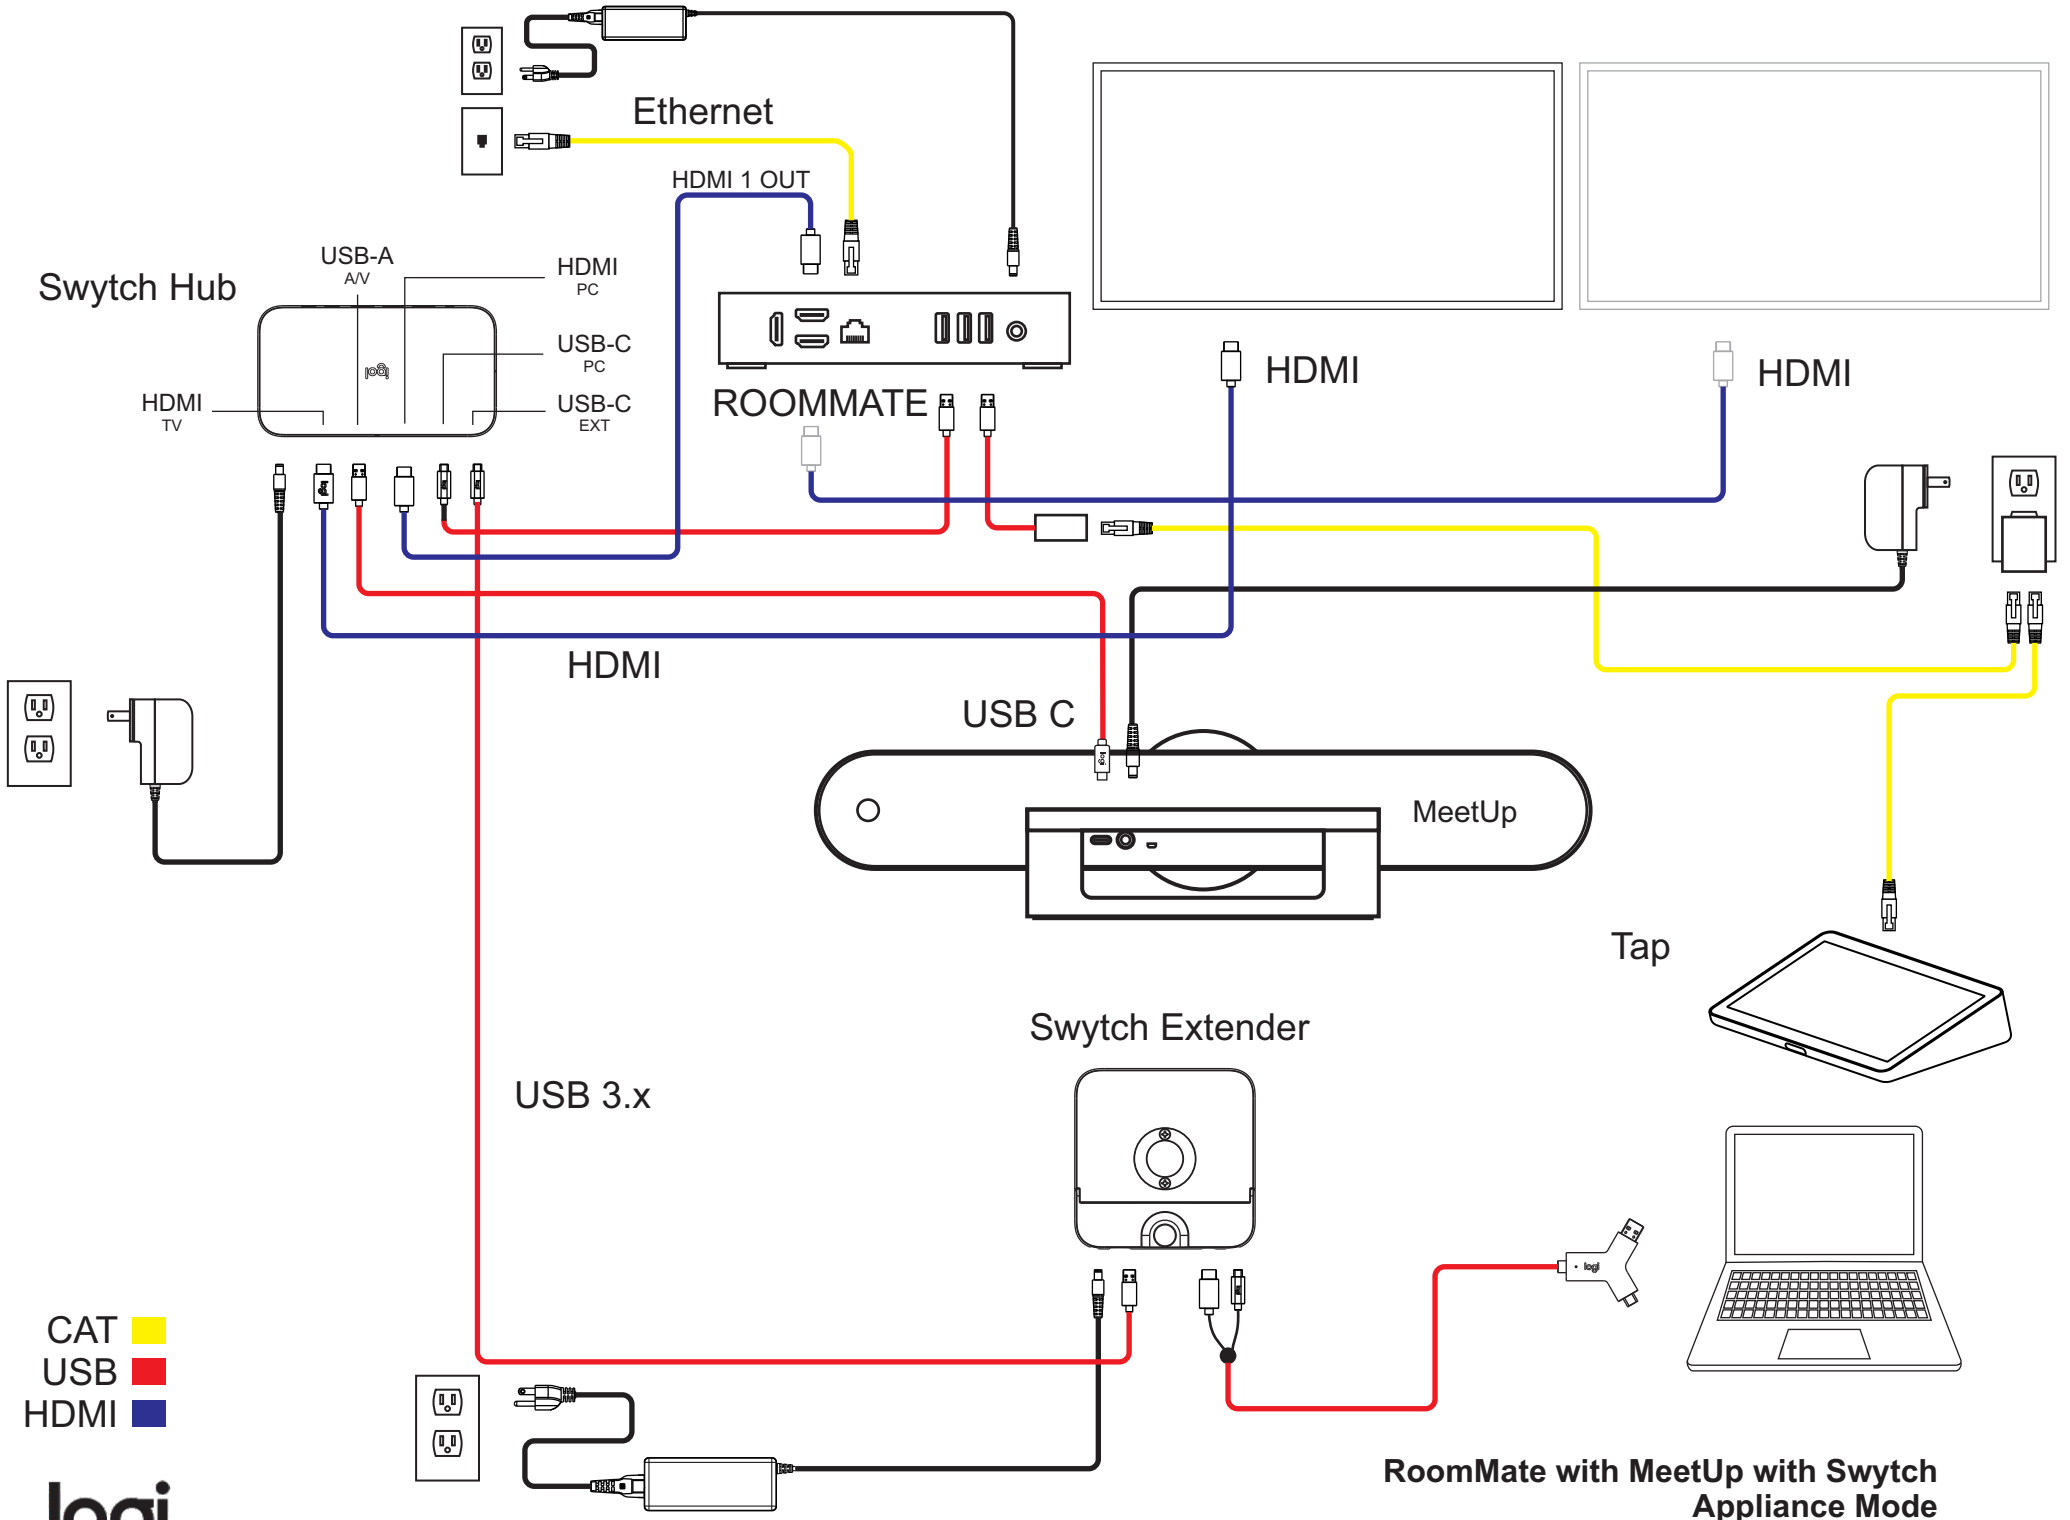

RoomMate with MeetUp with Swytch Appliance Mode

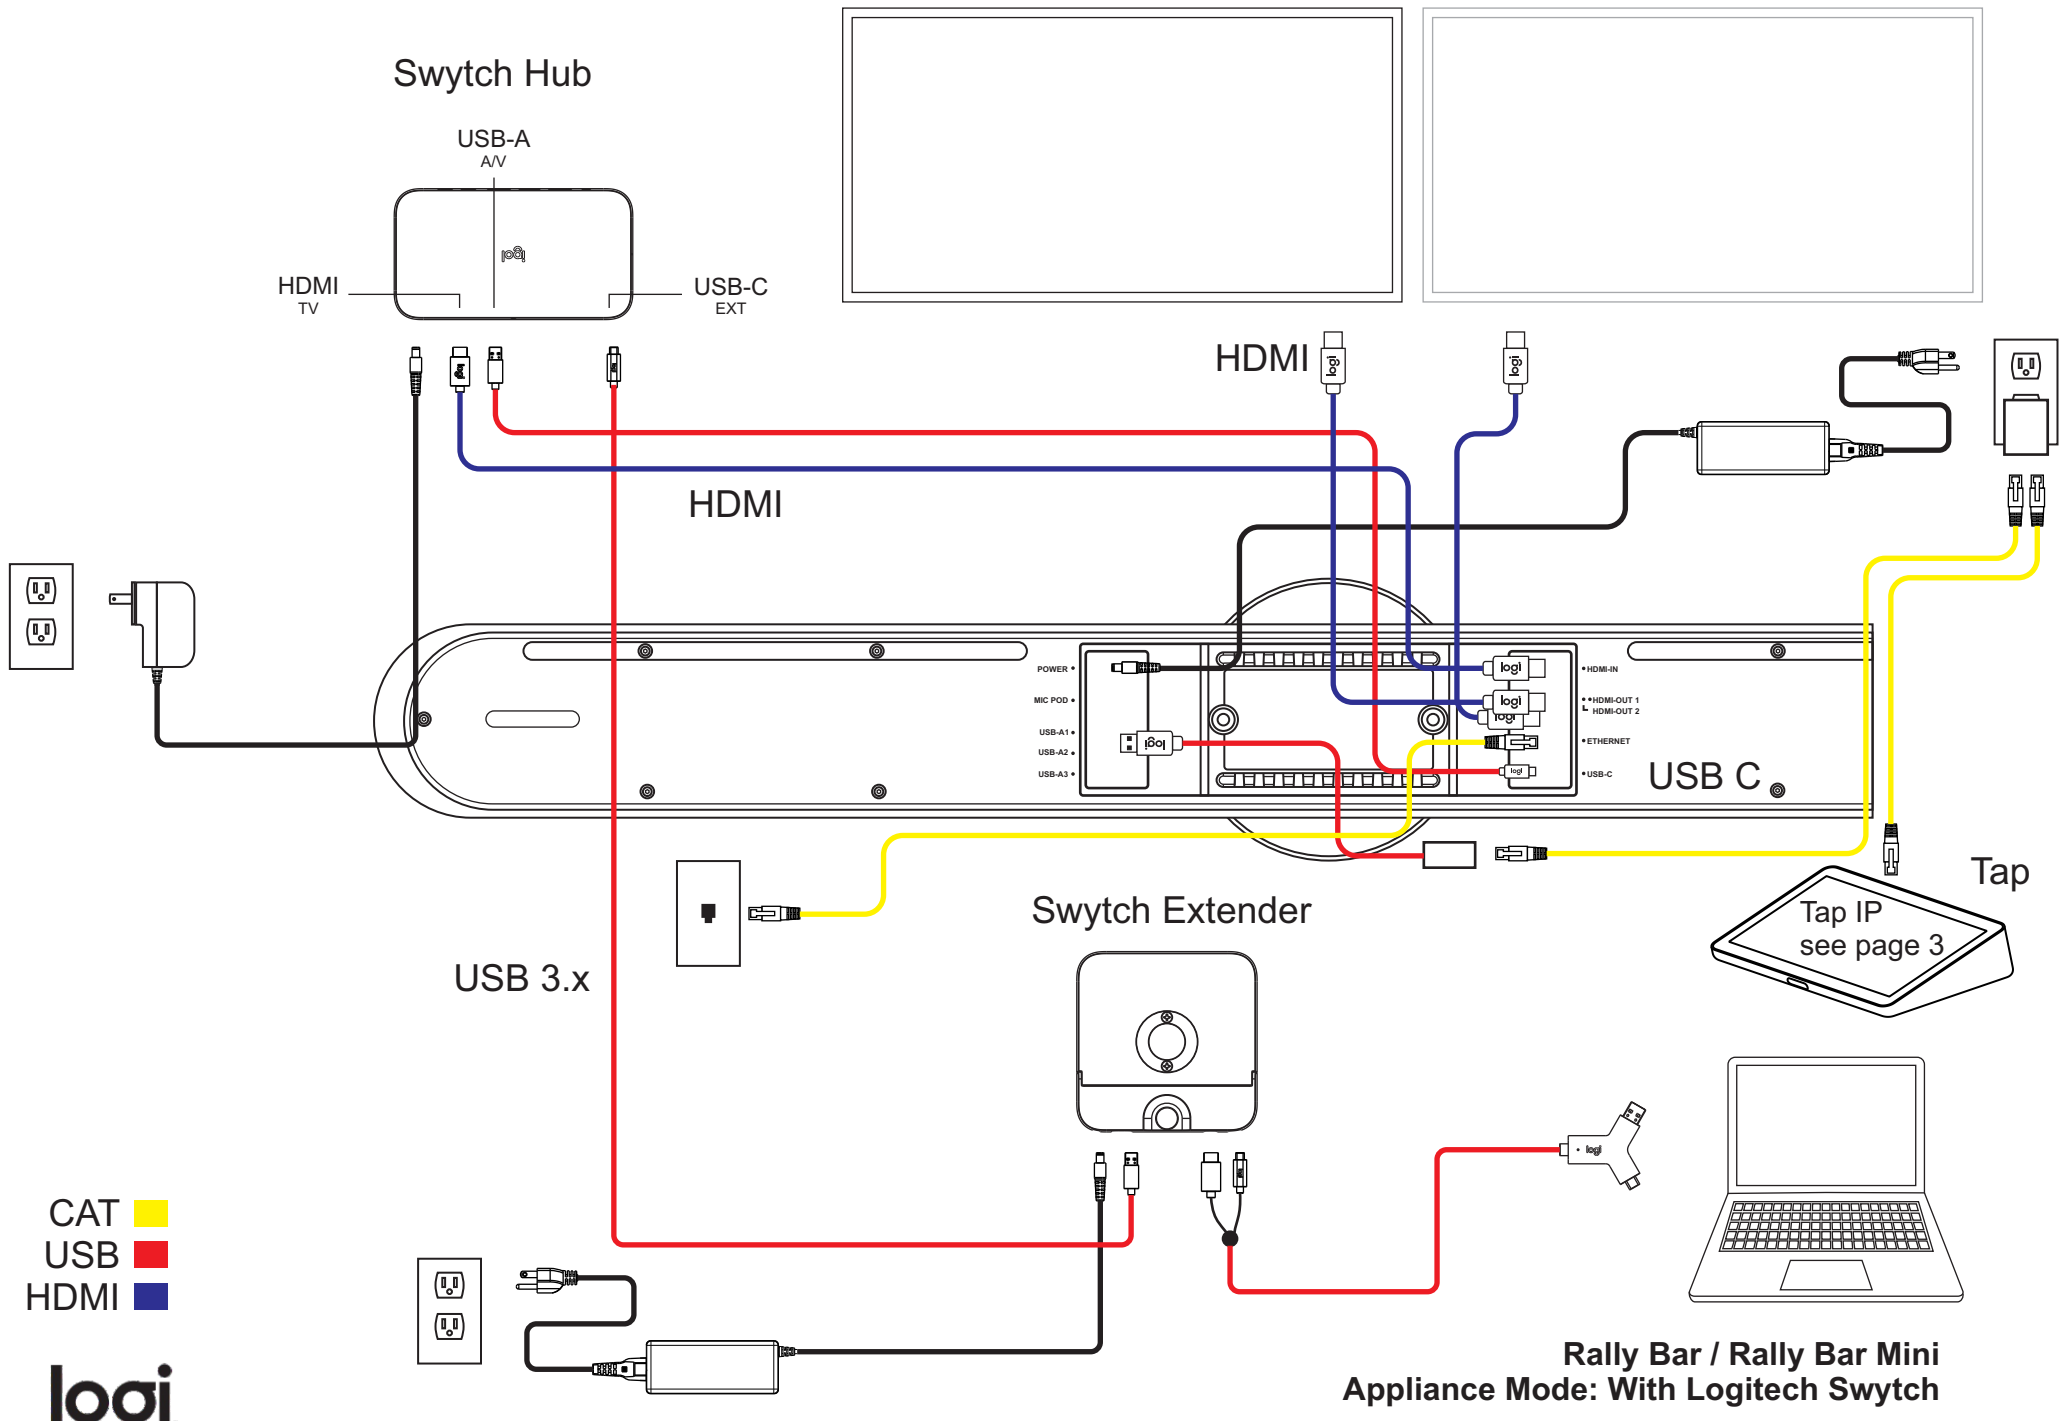


Rally Bar / Rally Bar Mini
Appliance Mode: With Logitech Swytch

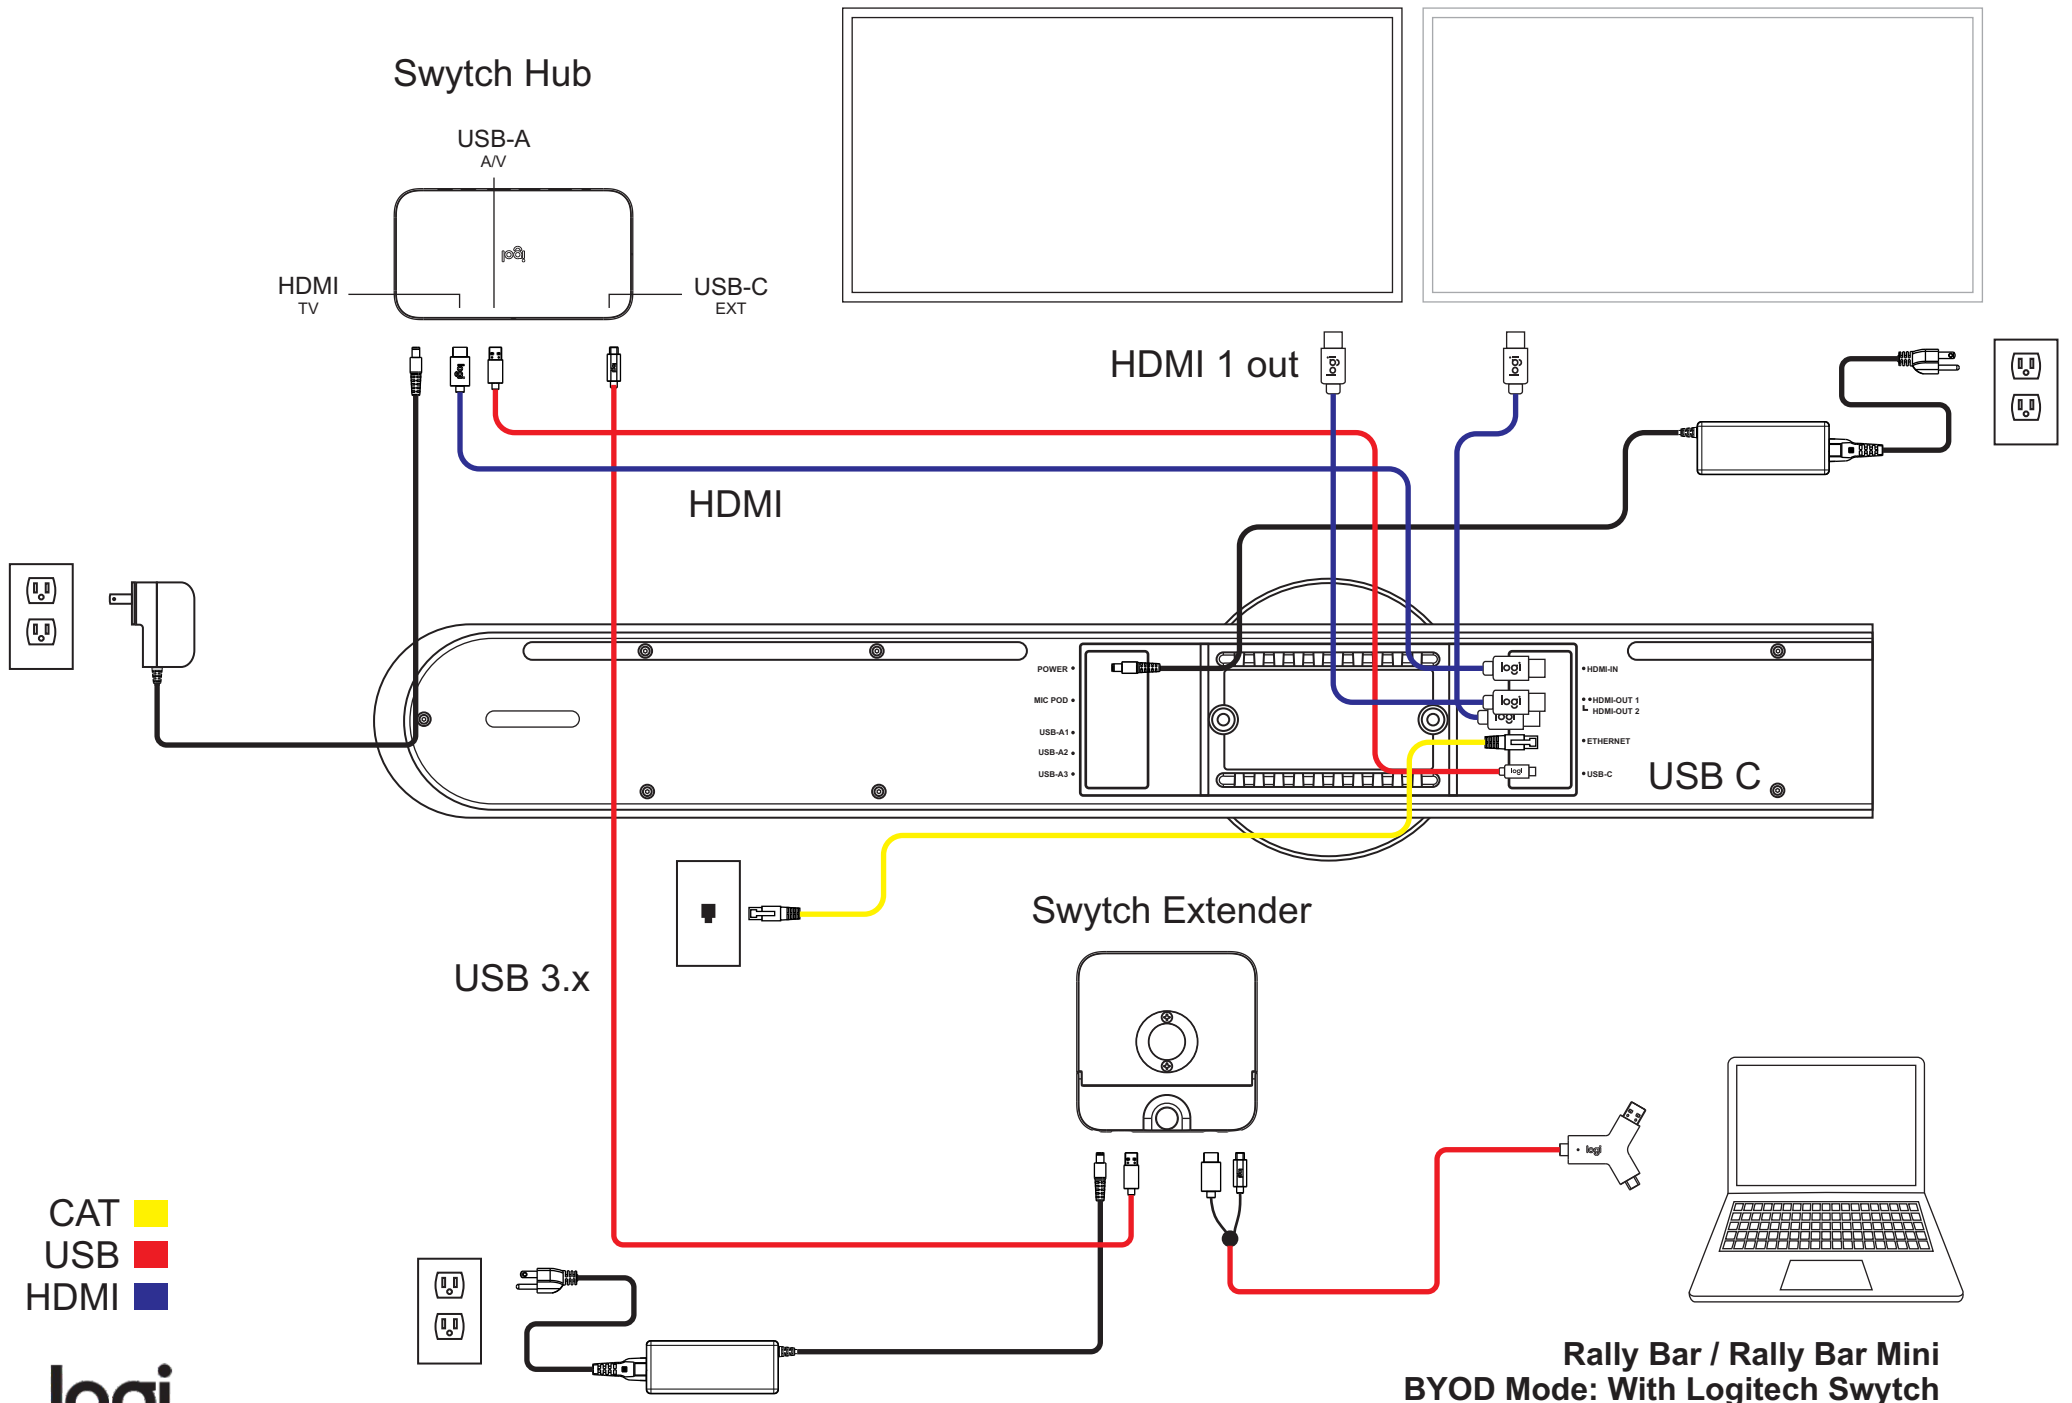


Rally Bar / Rally Bar Mini
BYOD Mode: With Logitech Swytch

ROOMMATE


Table of Contents

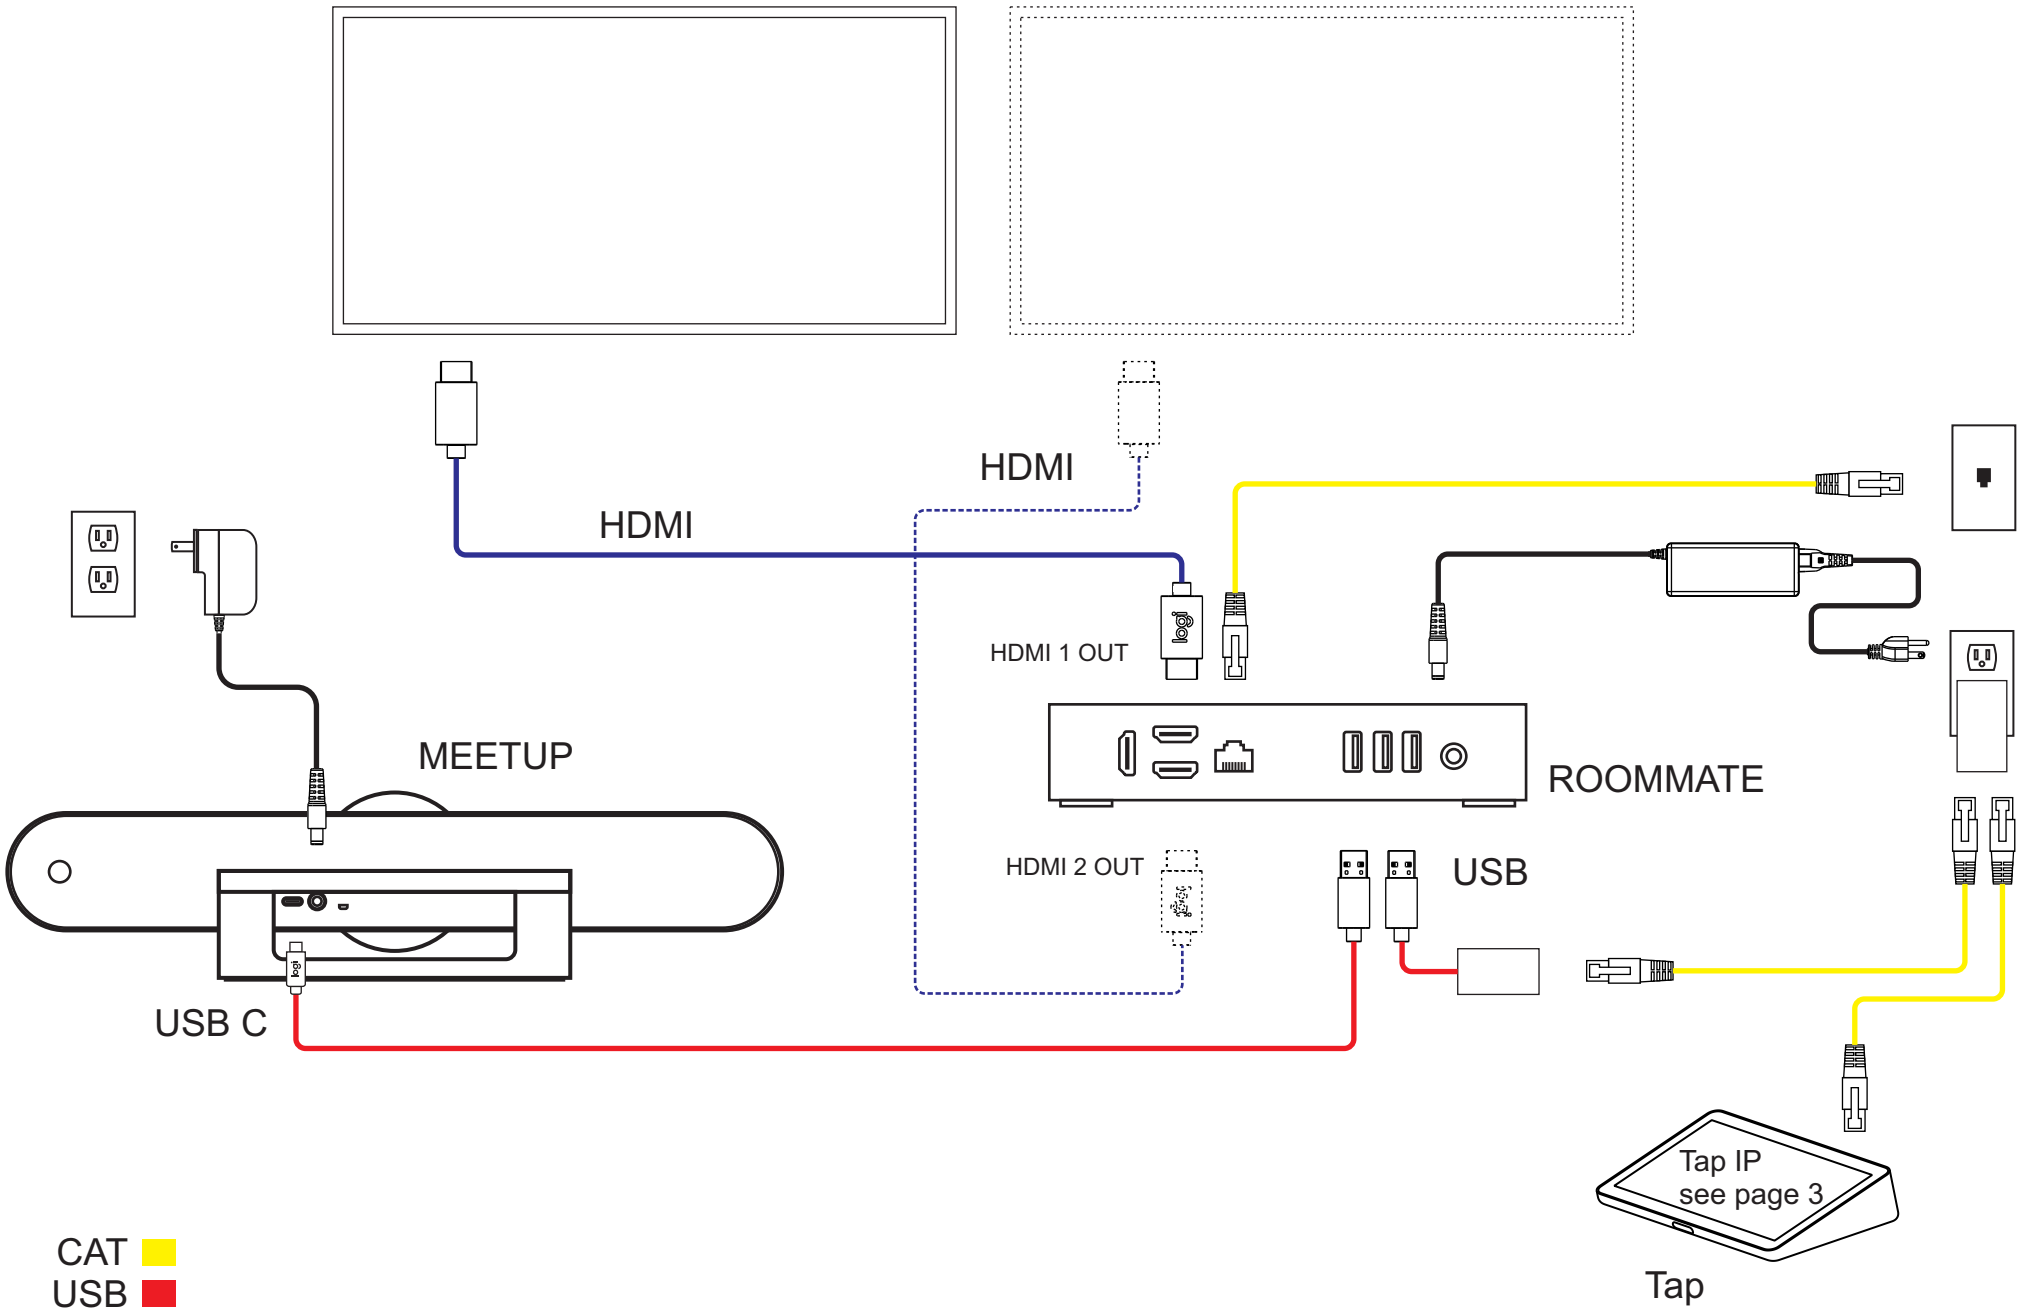



RoomMate with MeetUp
Appliance Mode

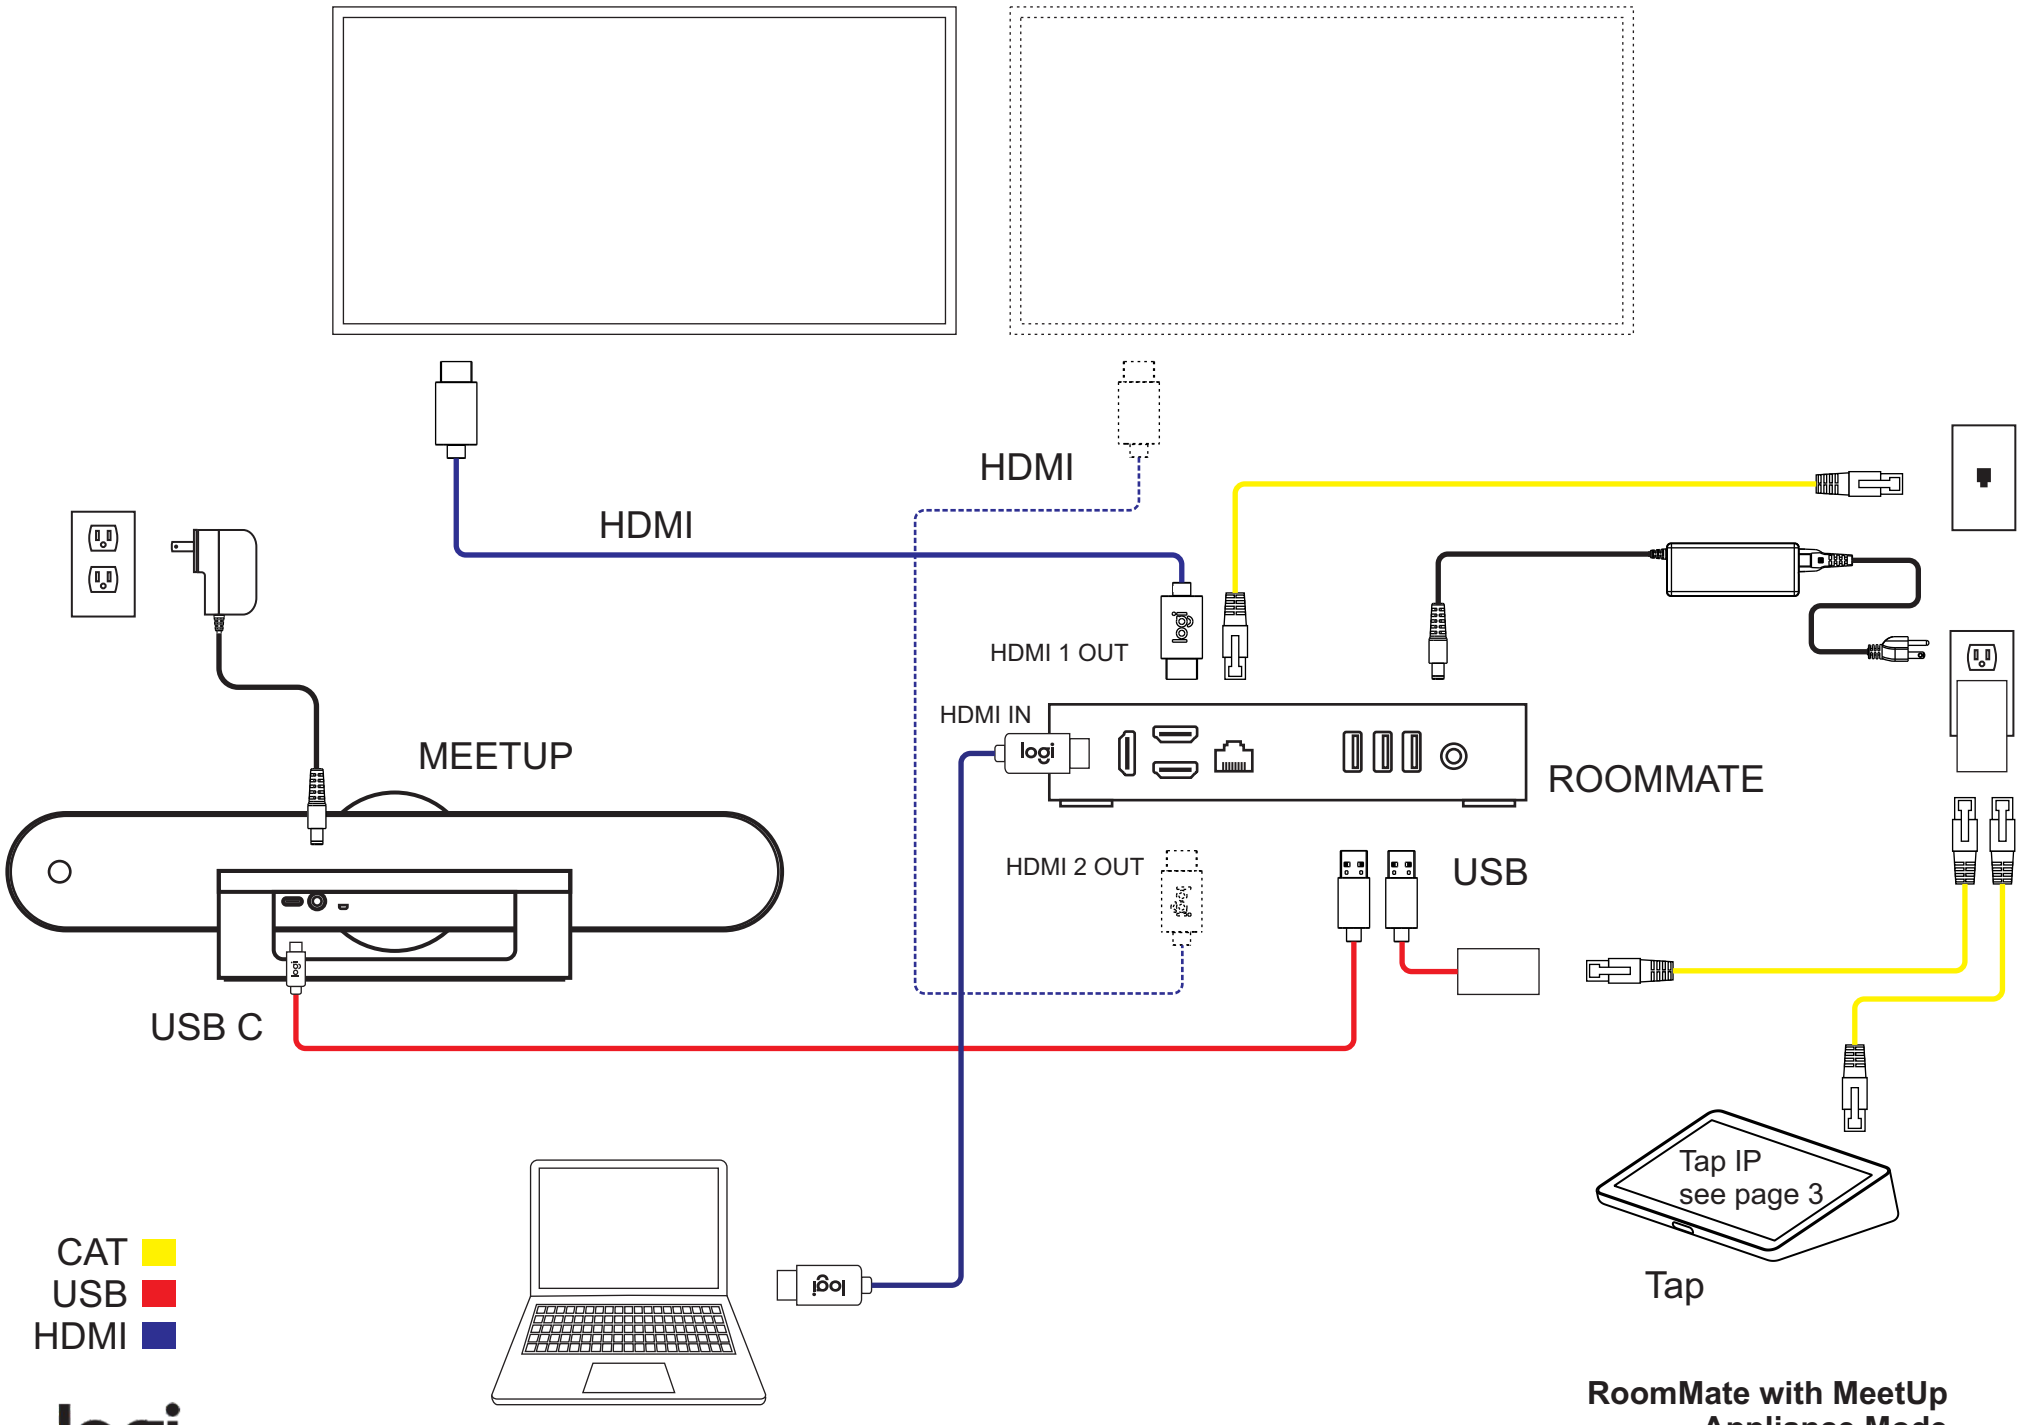

RoomMate with MeetUp
Appliance Mode
Content Sharing via HDMI ingest

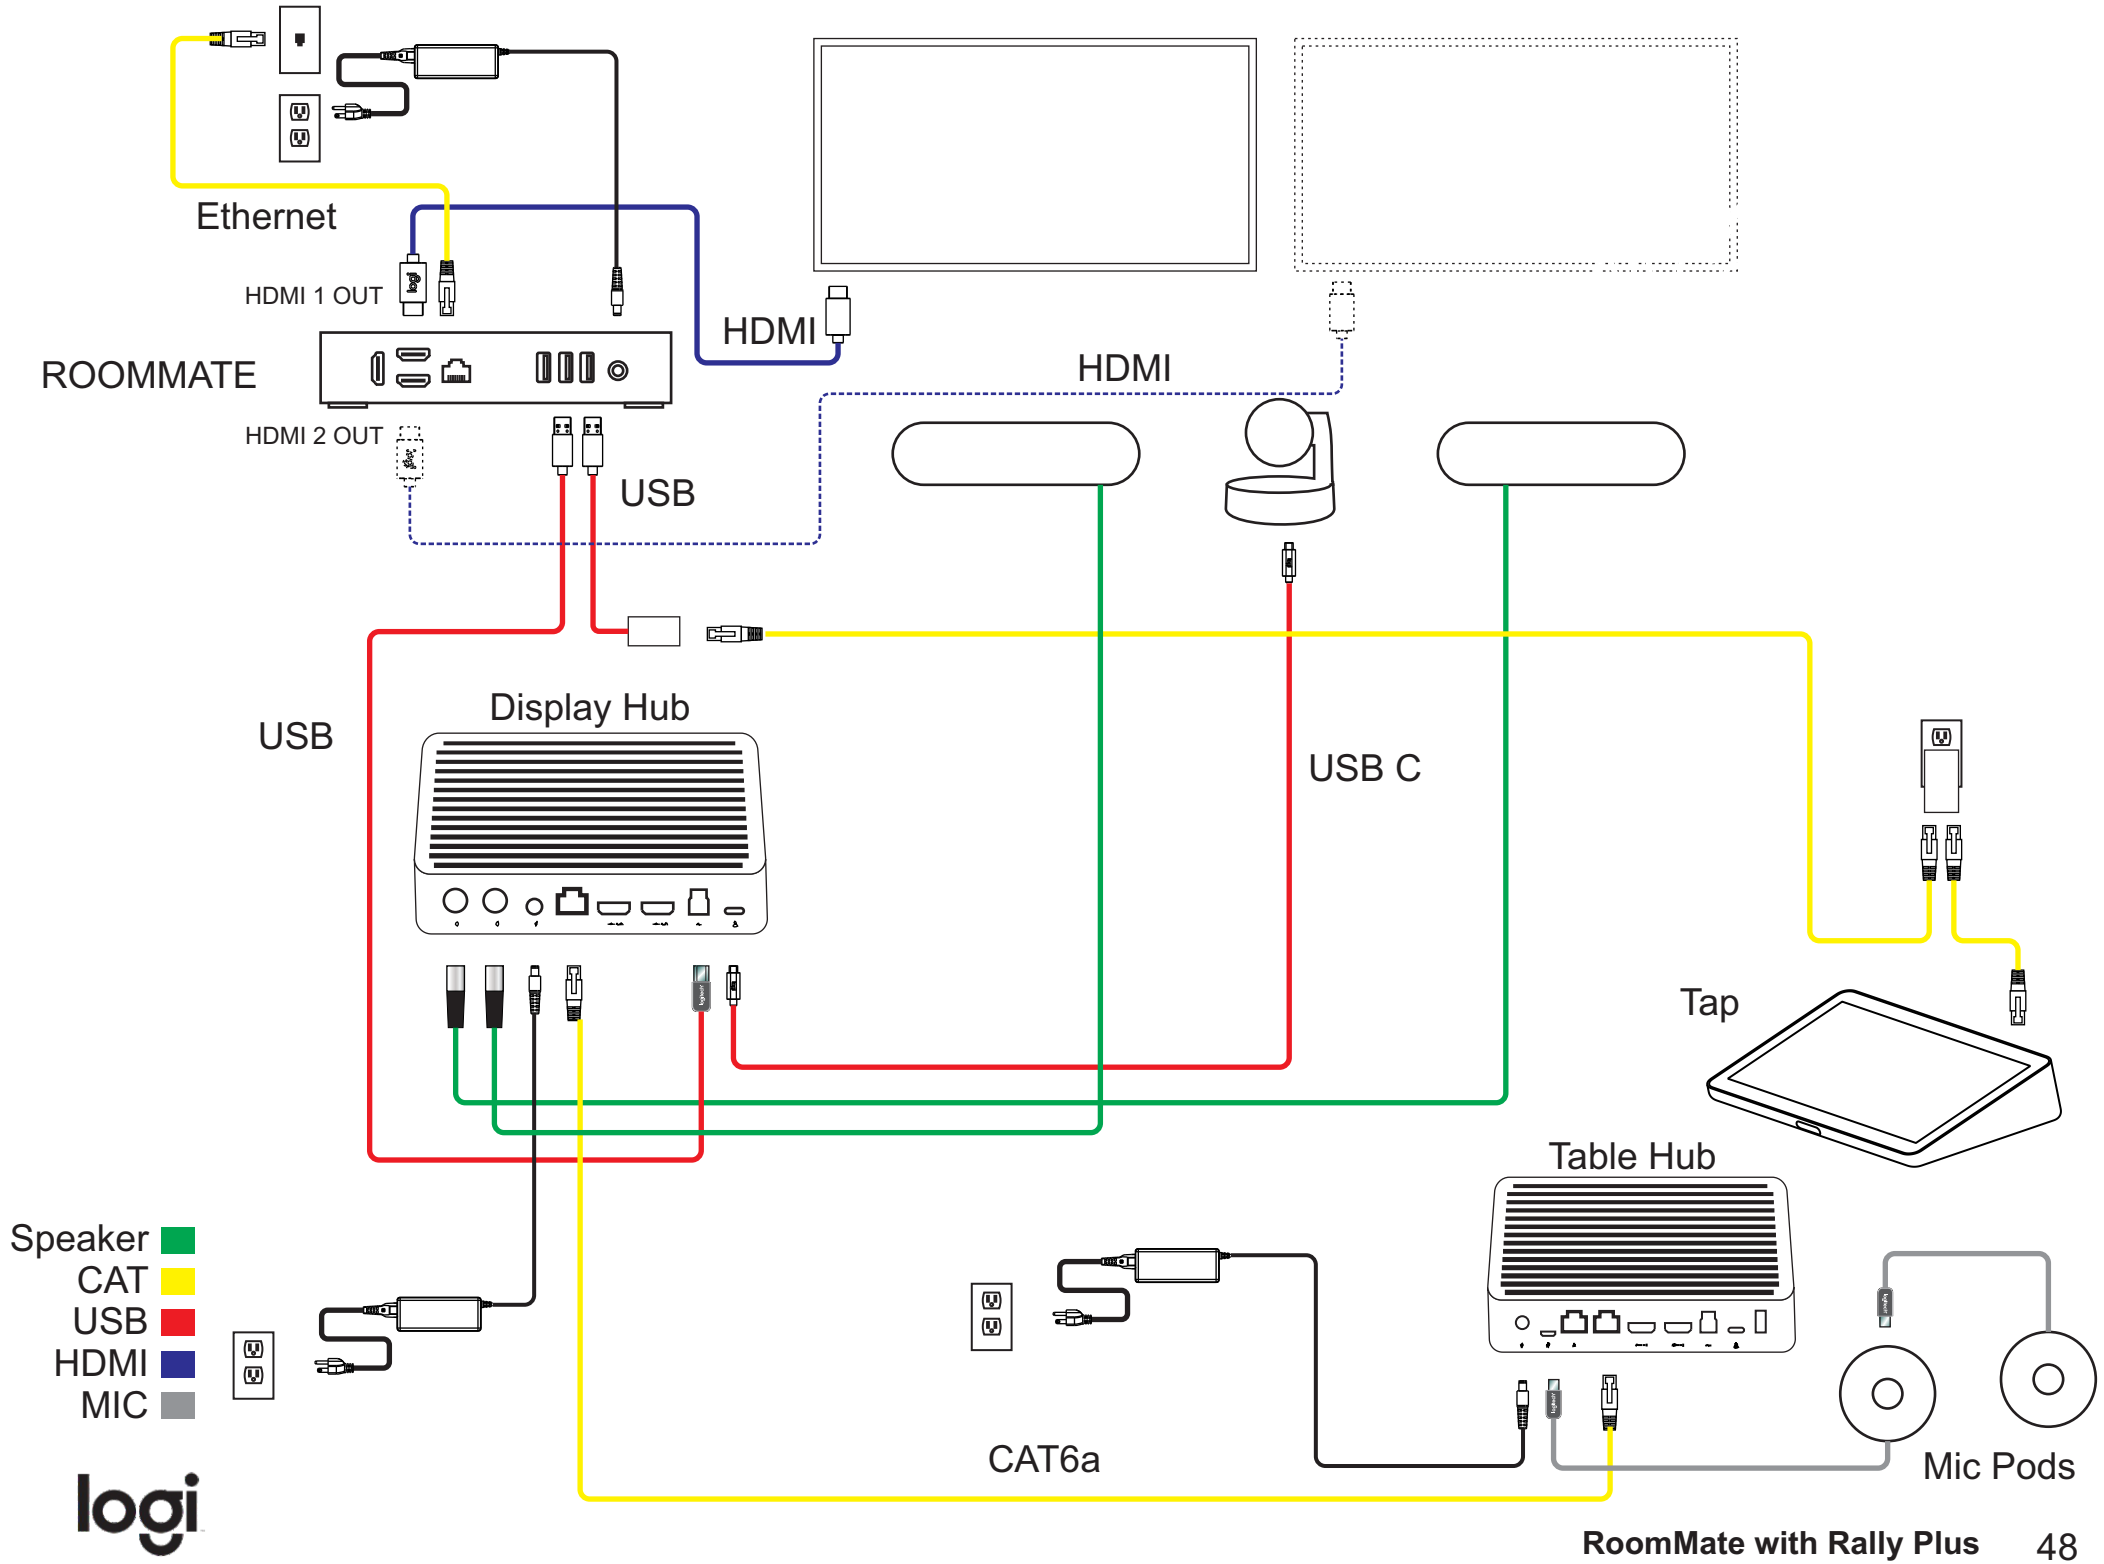

Ethernet
HDMI 1 OUT
HDMI
ROOMMATE
HDMI
HDMI 2 OUT
USB
USB
Display Hub
USB C
Tap
Table Hub
Speaker
CAT
USB
HDMI
MIC
CAT6a
Mic Pods

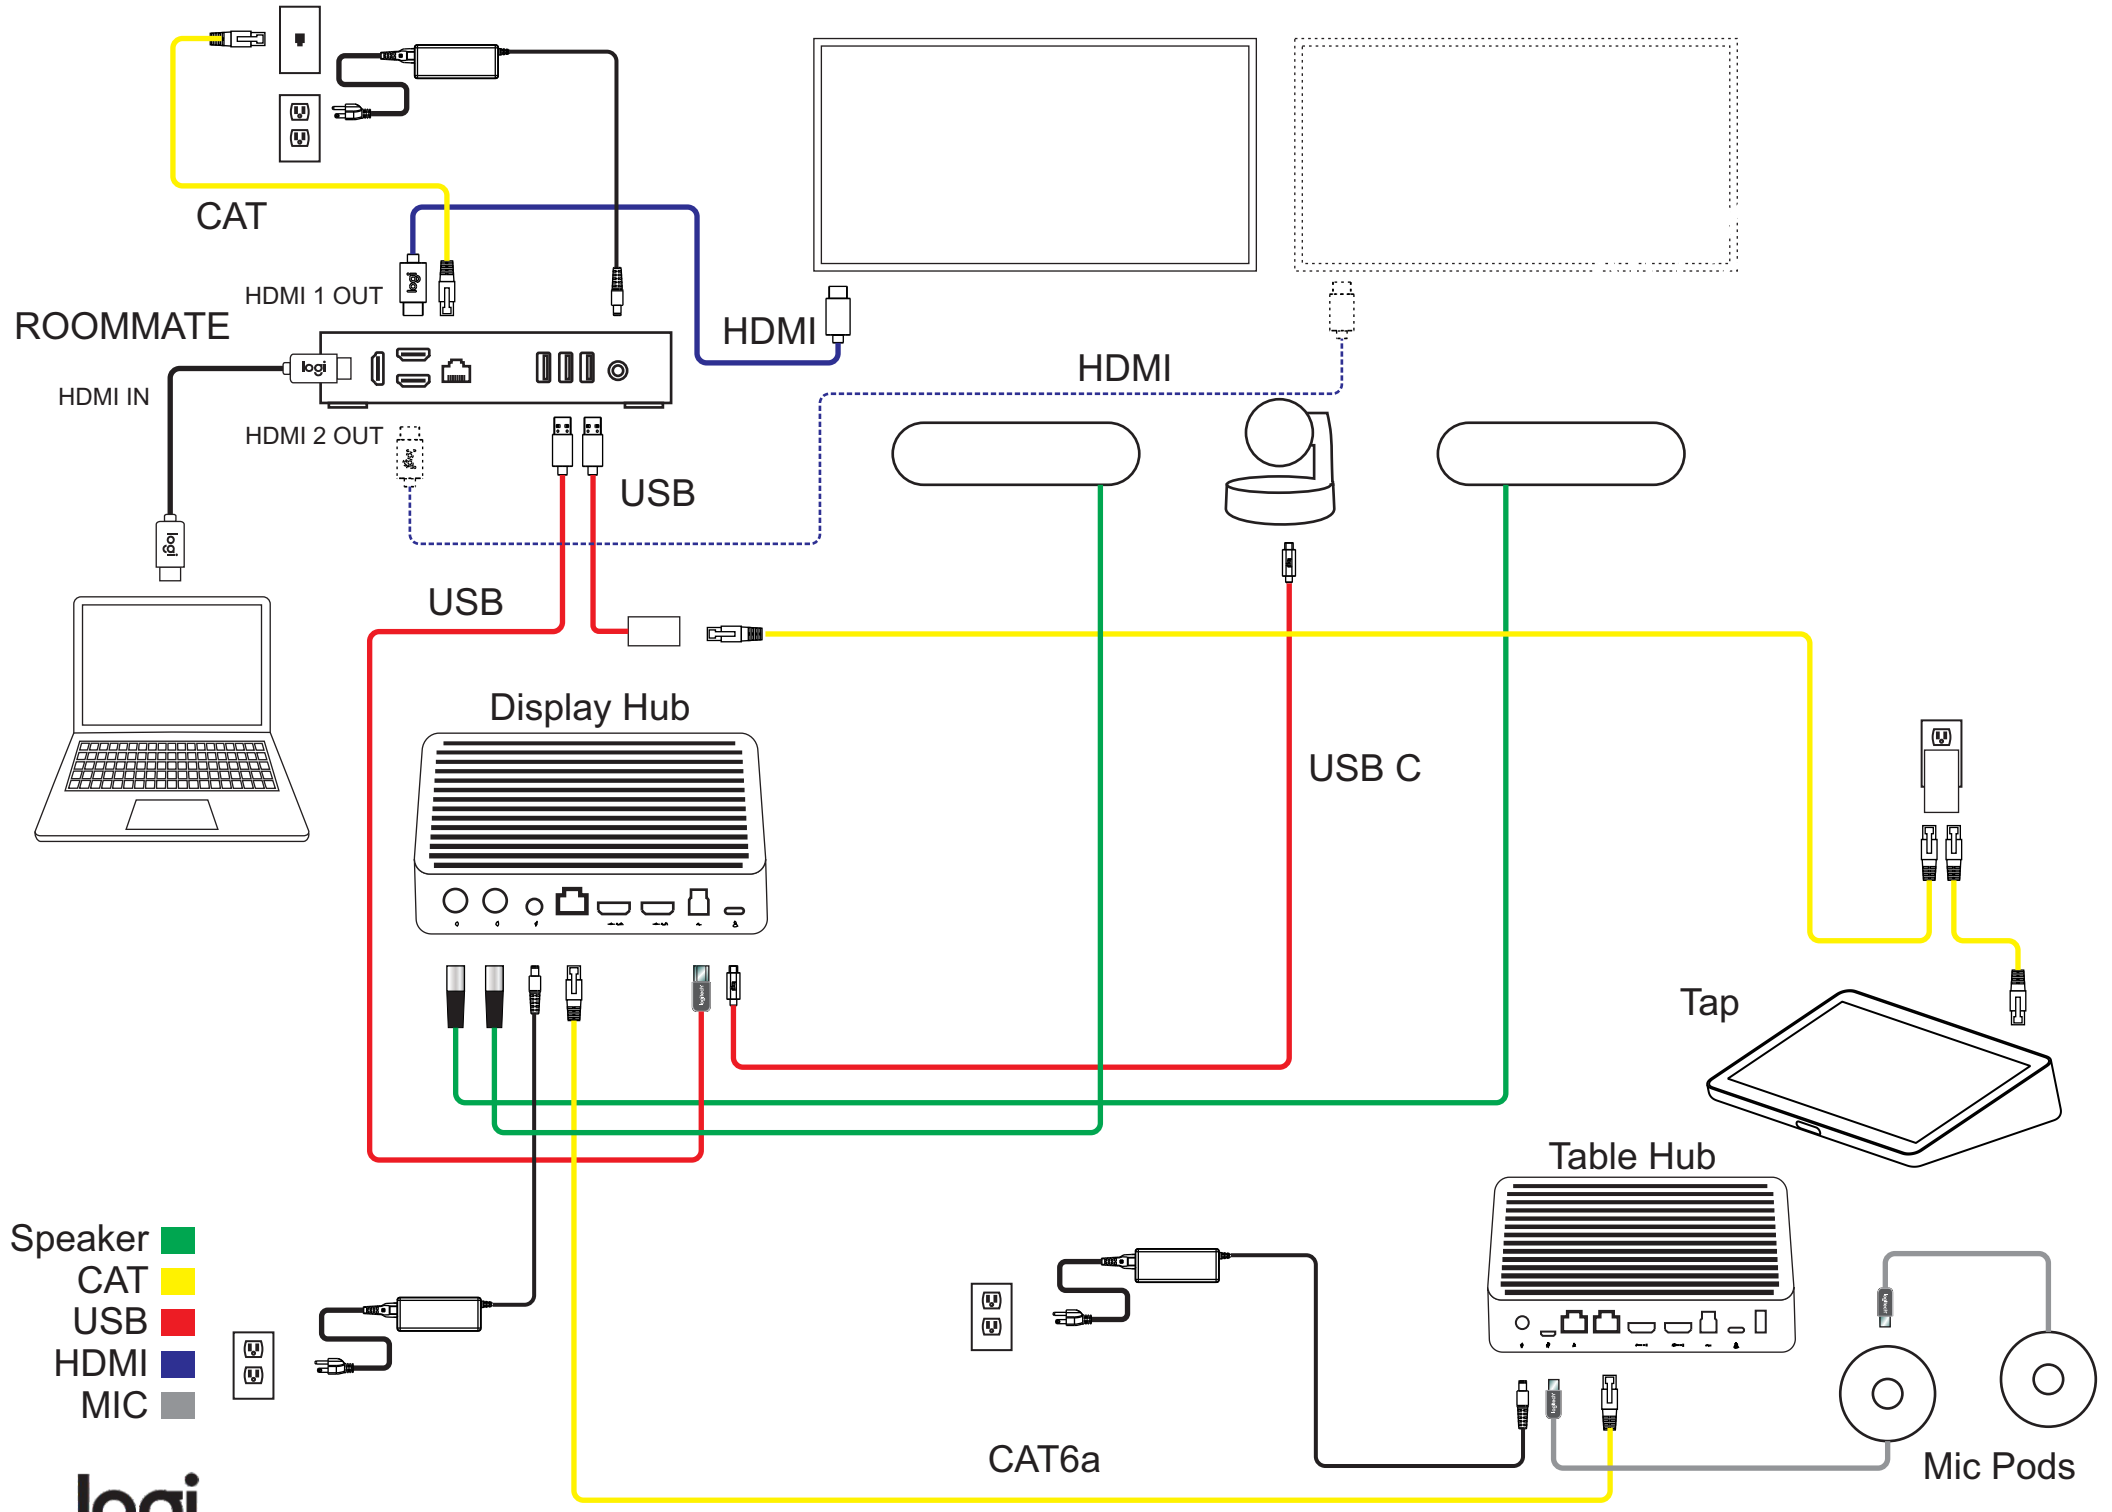
CAT
HDMI 1 OUT
ROOMMATE
HDMI
HDMI IN
HDMI
HDMI 2 OUT
USB
USB
Display Hub
USB C
Tap
Table Hub
Speaker
CAT
USB
HDMI
MIC
CAT6a
Mic Pods

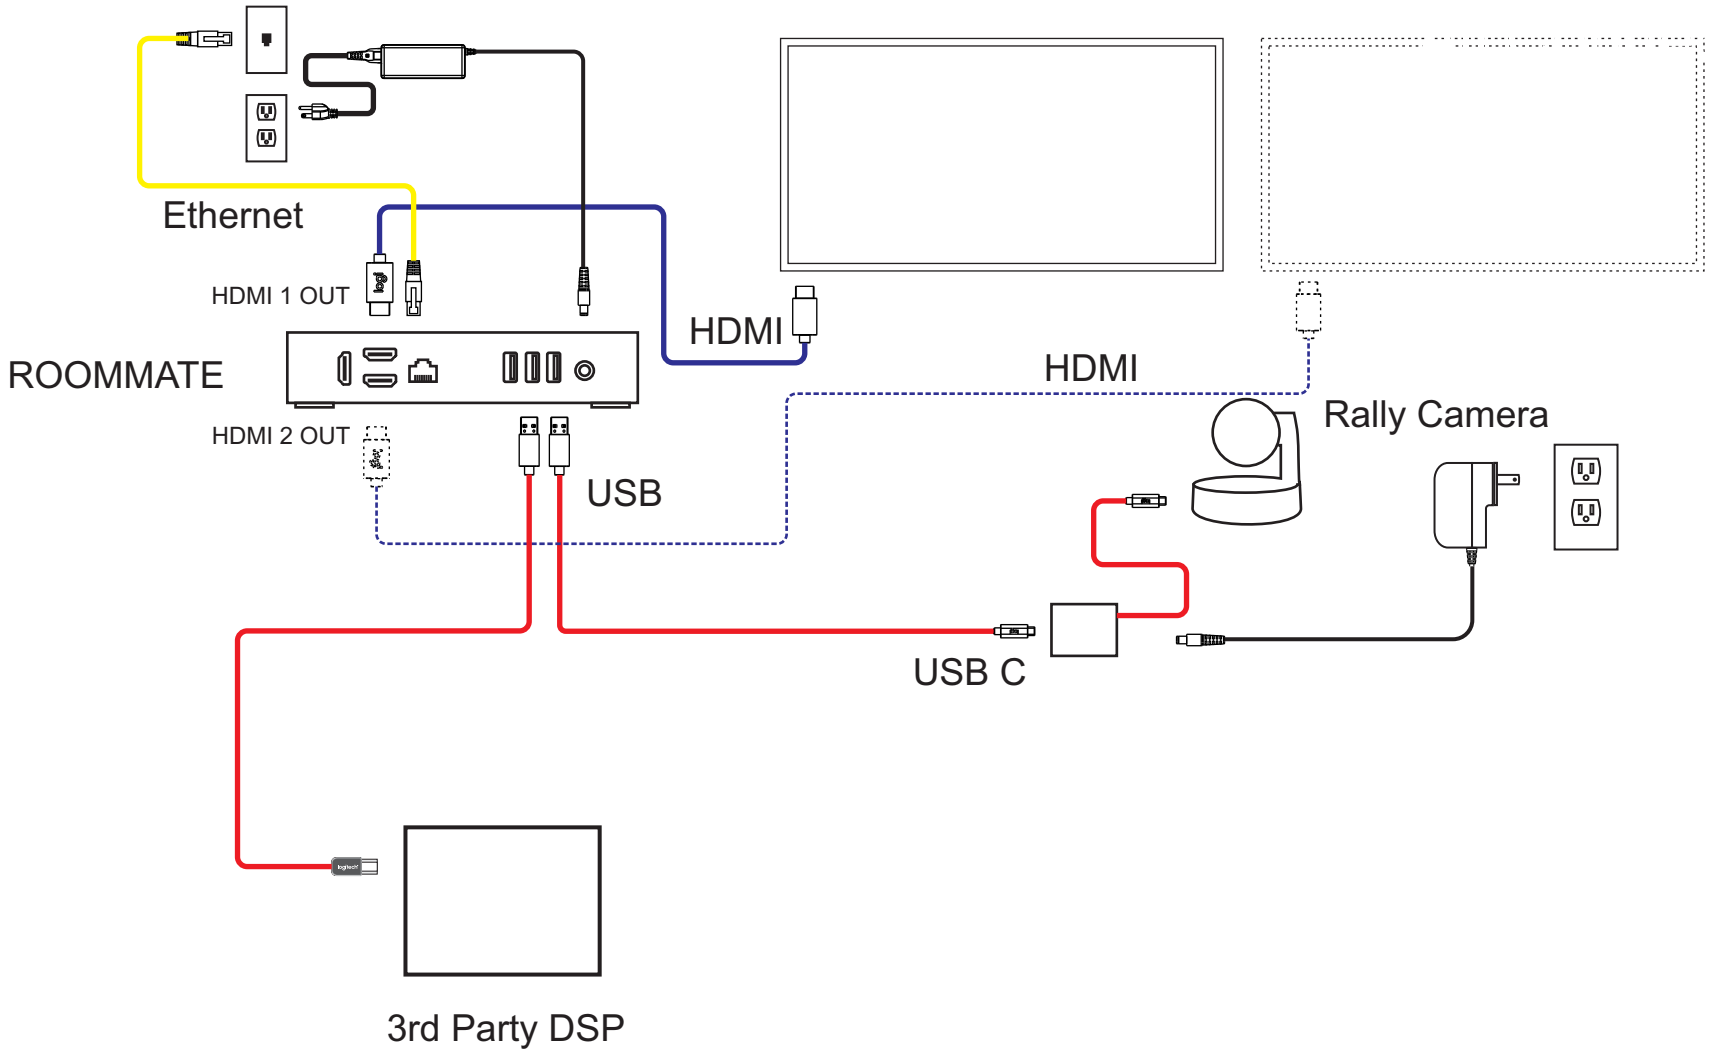


CAT
USB
HDMI

RoomMate with Rally Camera and 3rd Party DSP

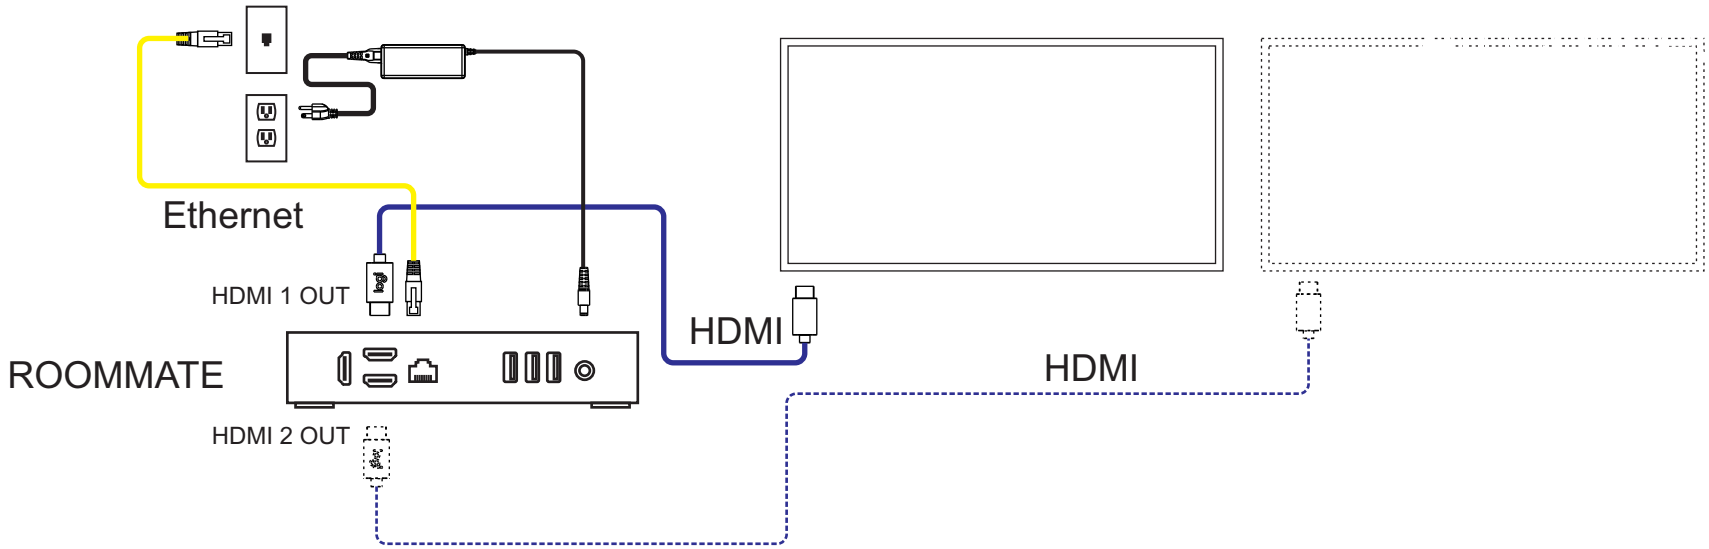


CAT
USB
HDMI

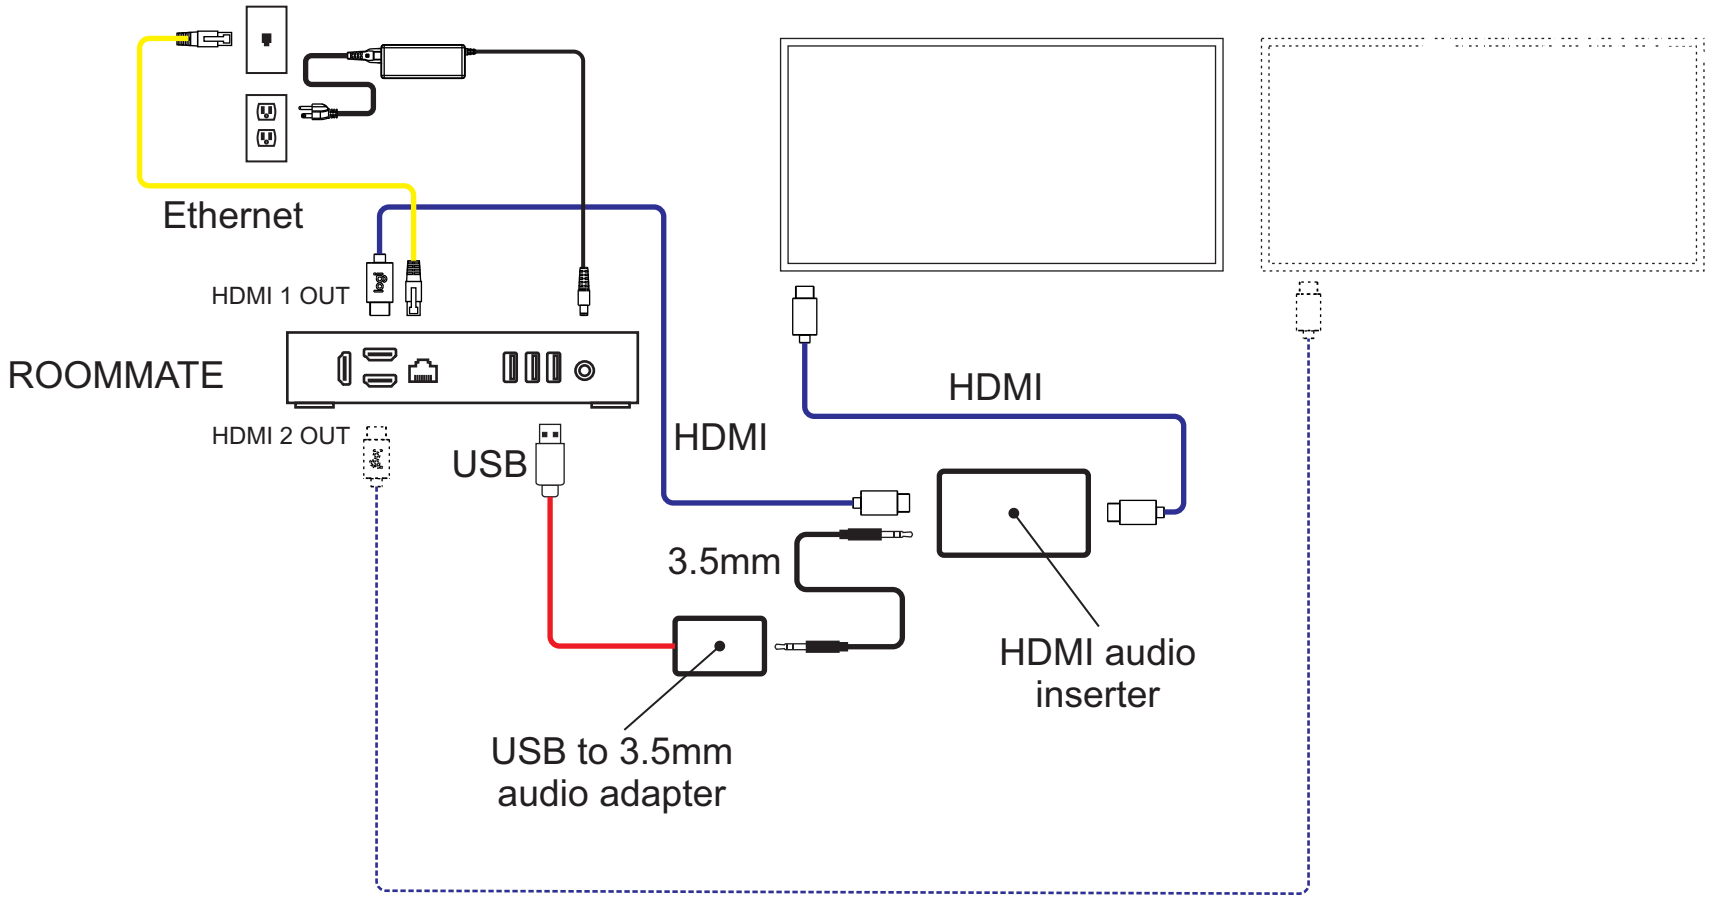
Ethernet
HDMI 1 OUT
ROOMMATE
HDMI 2 OUT
USB
HDMI
HDMI
3.5mm
HDMI audio inserter
USB to 3.5mm audio adapter


CAT
USB
HDMI

SCRIBE


Table of Contents

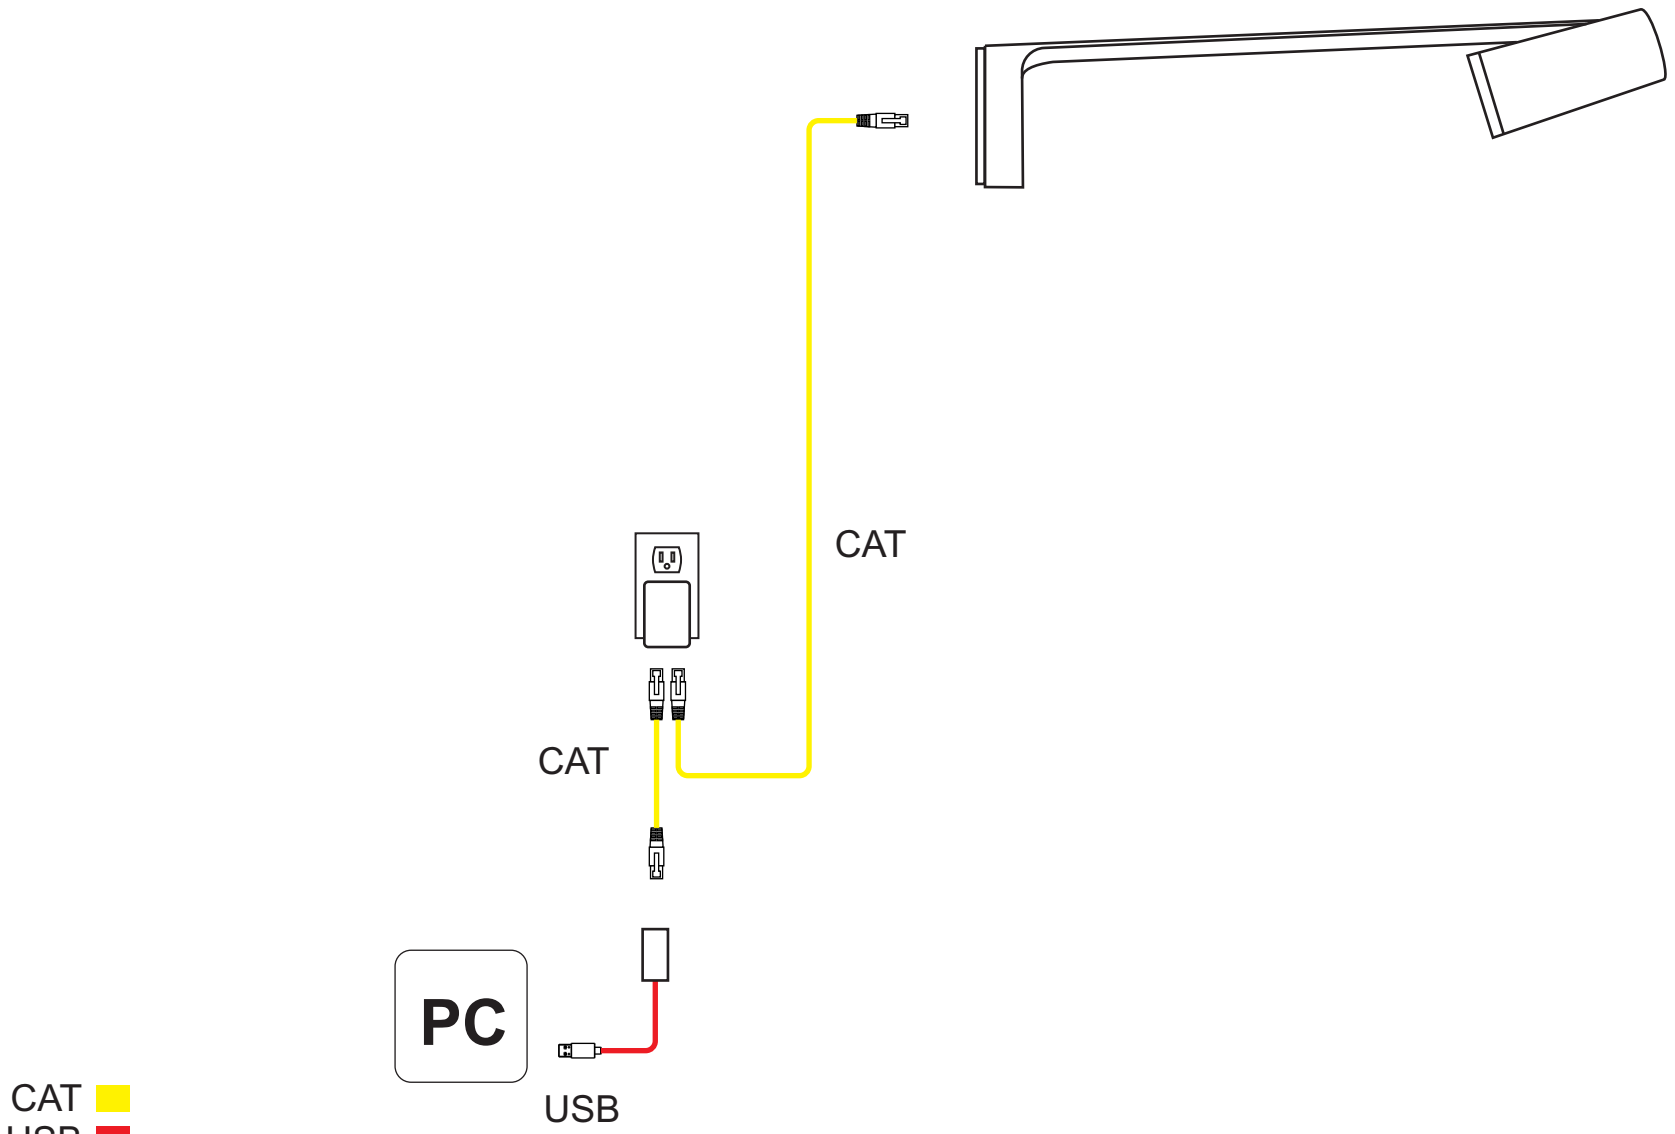

Scribe: PC connection

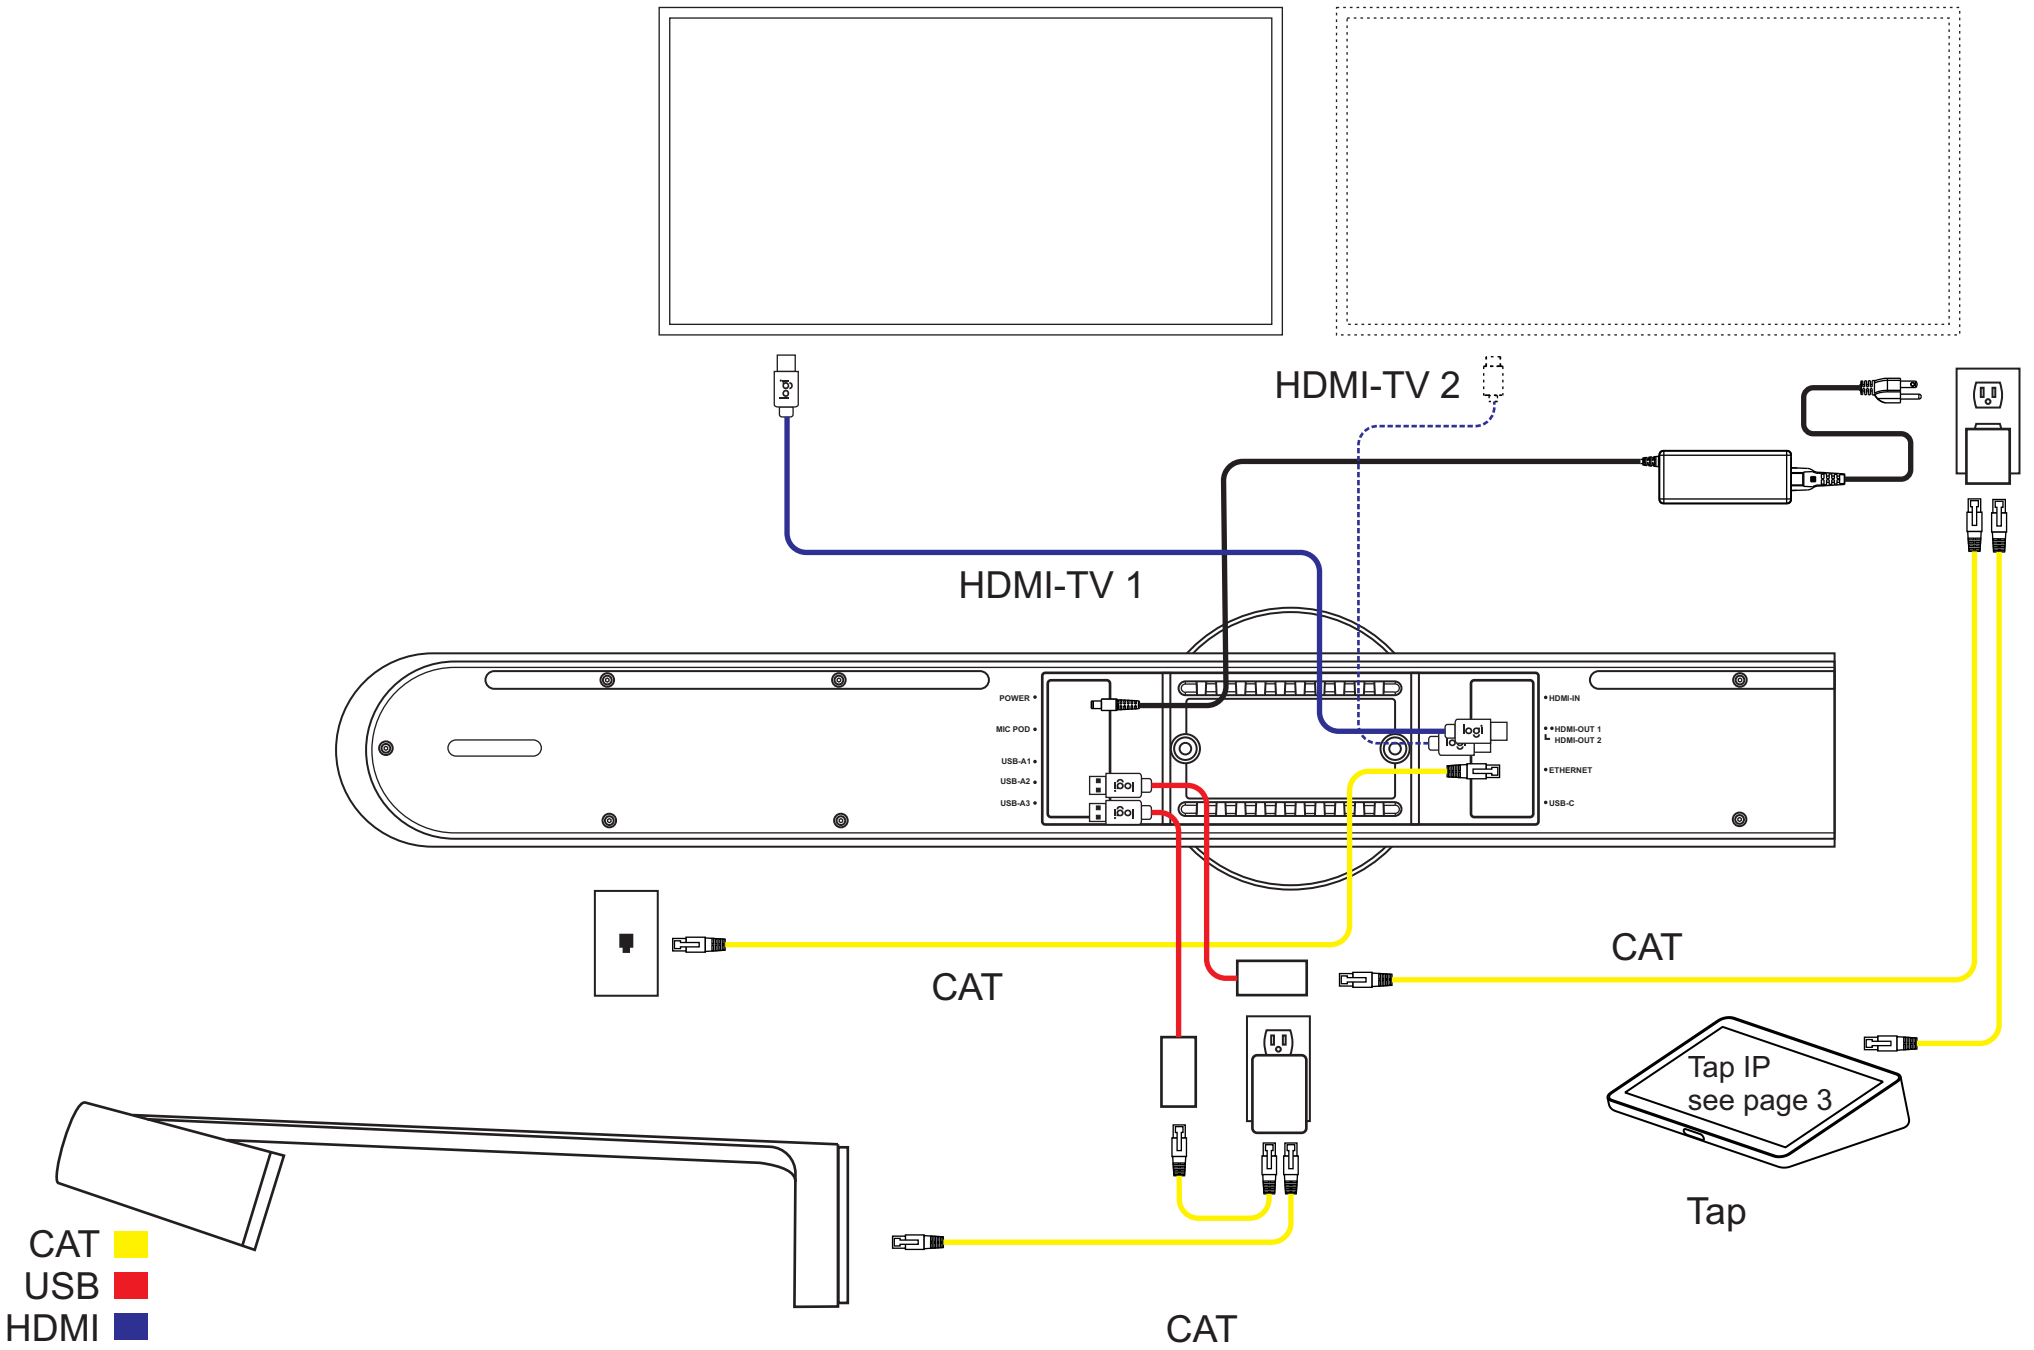

Scribe: Appliance mode connection (VC application dependent)

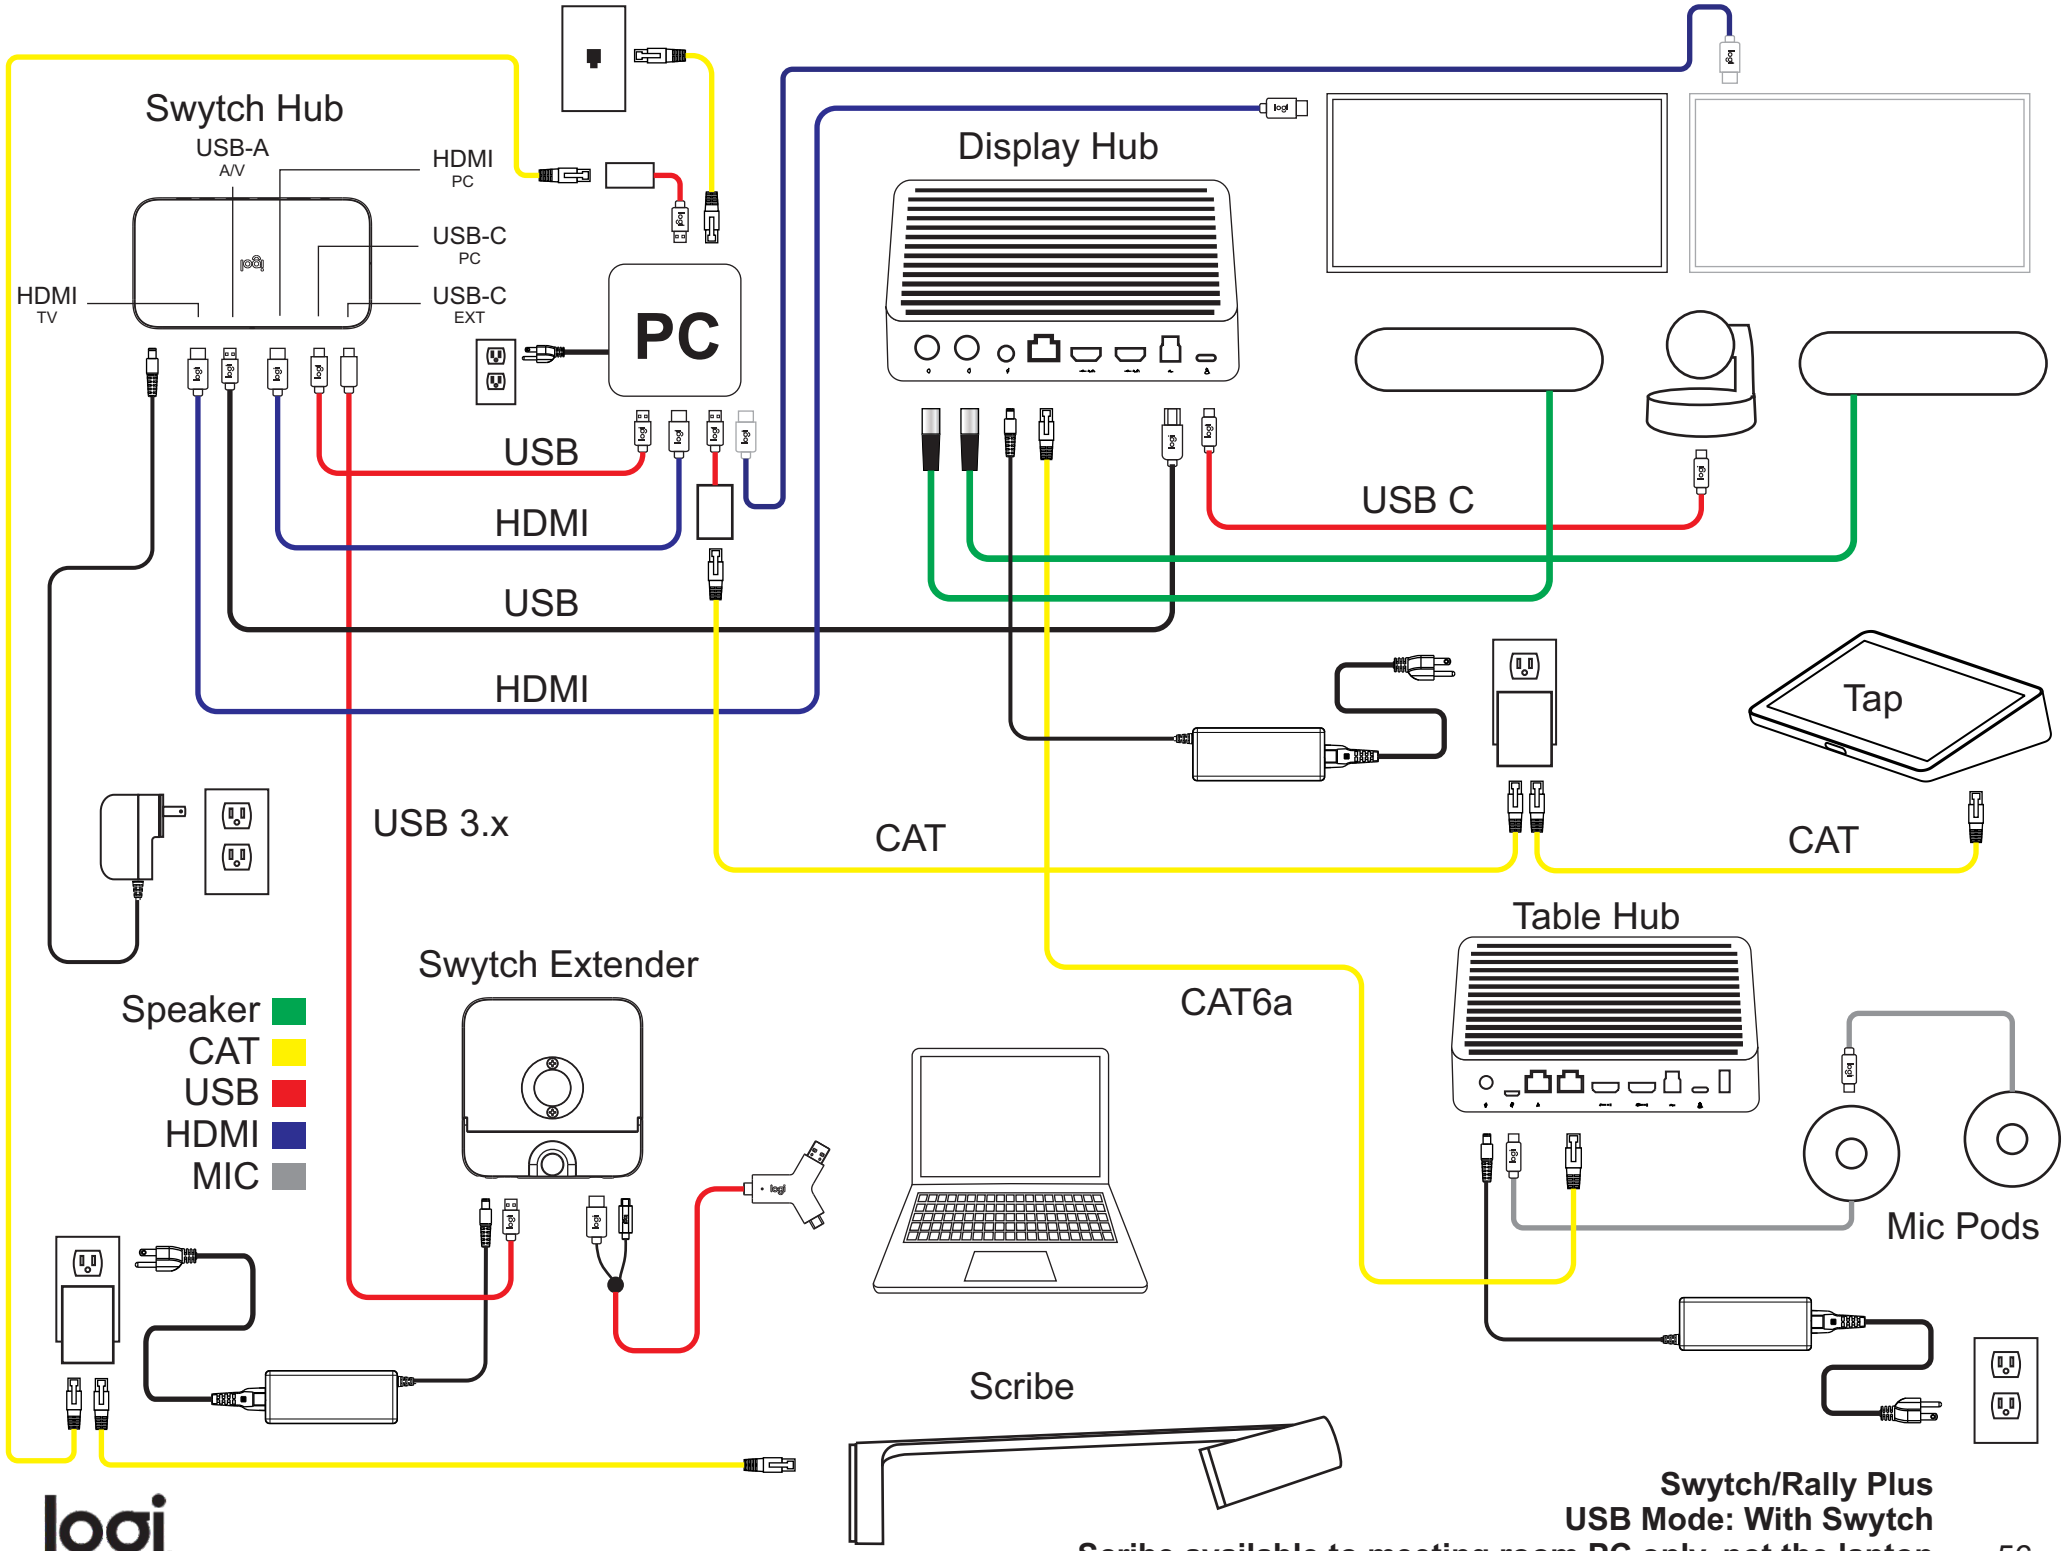

Swytch/Rally Plus
USB Mode: With Swytch
Scribe available to meeting room PC only, not the laptop


SIGHT

Table of Contents


Sight requires POE+ power (802.3at Type 2). This can be supplied by connecting to a POE+ network switch or an ***active*** POE+ power injector.


When using Sight

- Rally Bar supports up to 3 Mic Pods and 2 Mic Pod Hubs.
- Rall Bar Mini supports up to 2 Mic Pods and 2 Mic Pod Hubs.
- Rally and Rally Plus support up to 6 of any combination of Mic Pods or Mic Pod Hubs (ie. 4 Mic Pods + 2 Mic Pod Hubs, or 5 Mic Pods and 1 Mic Pod Hub). Coming soon.

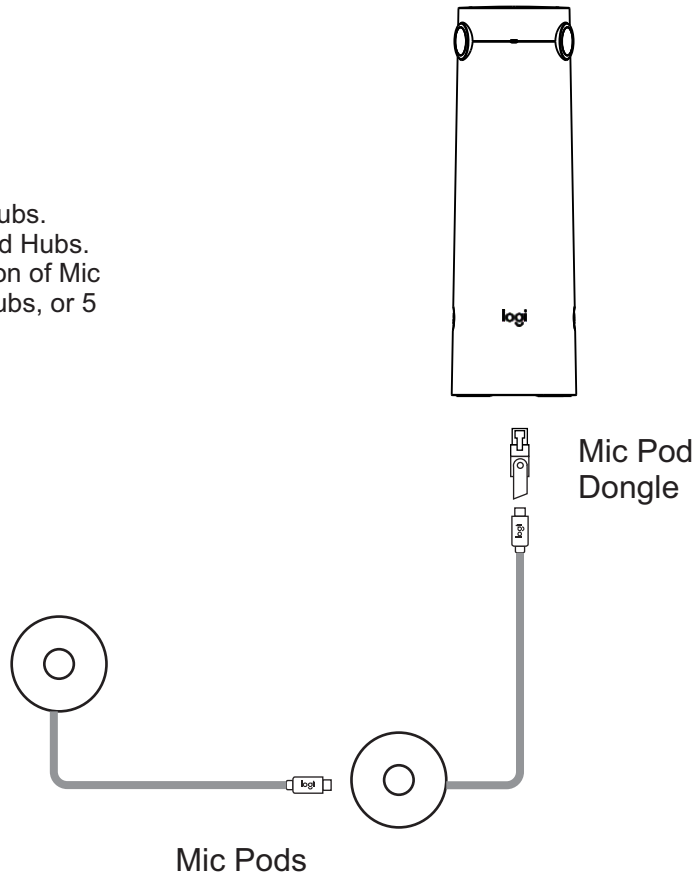


MIC

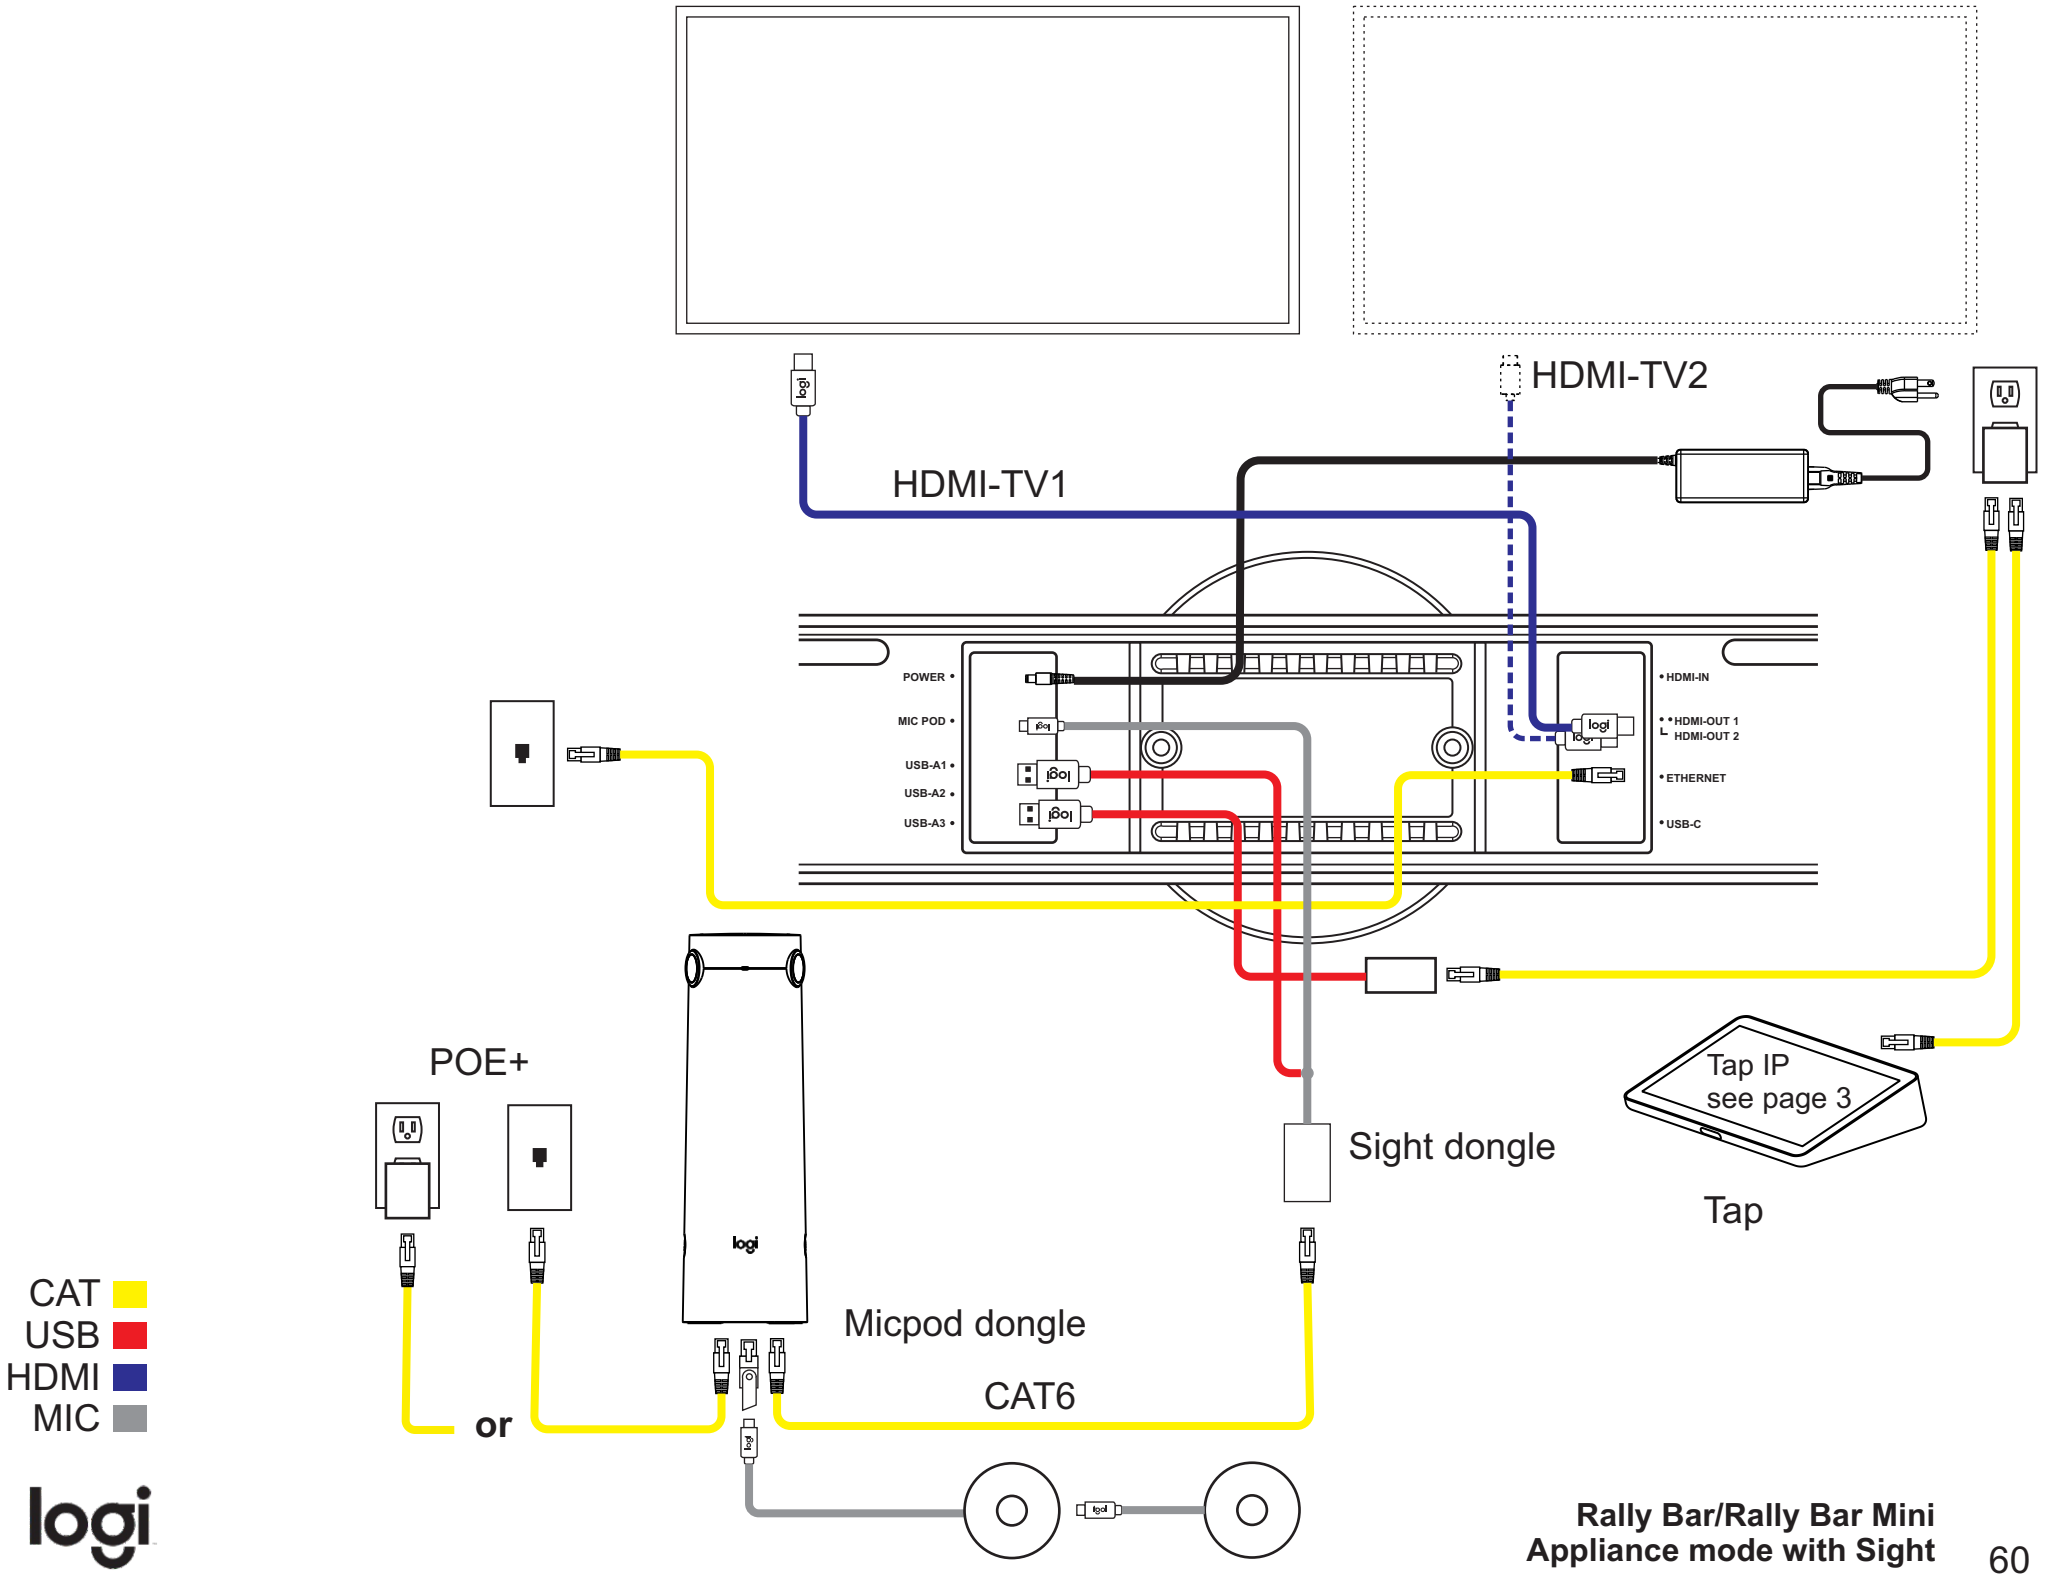

HDMI-TV2
HDMI-TV1
POWER
MIC POD
USB-A1
USB-A2
USB-A3
HDMI-IN
HDMI-OUT 1
HDMI-OUT 2
ETHERNET
USB-C
Tap IP
see page 3
Tap
Sight dongle
POE+
or
Micpod dongle
CAT6
CAT
USB
HDMI
MIC

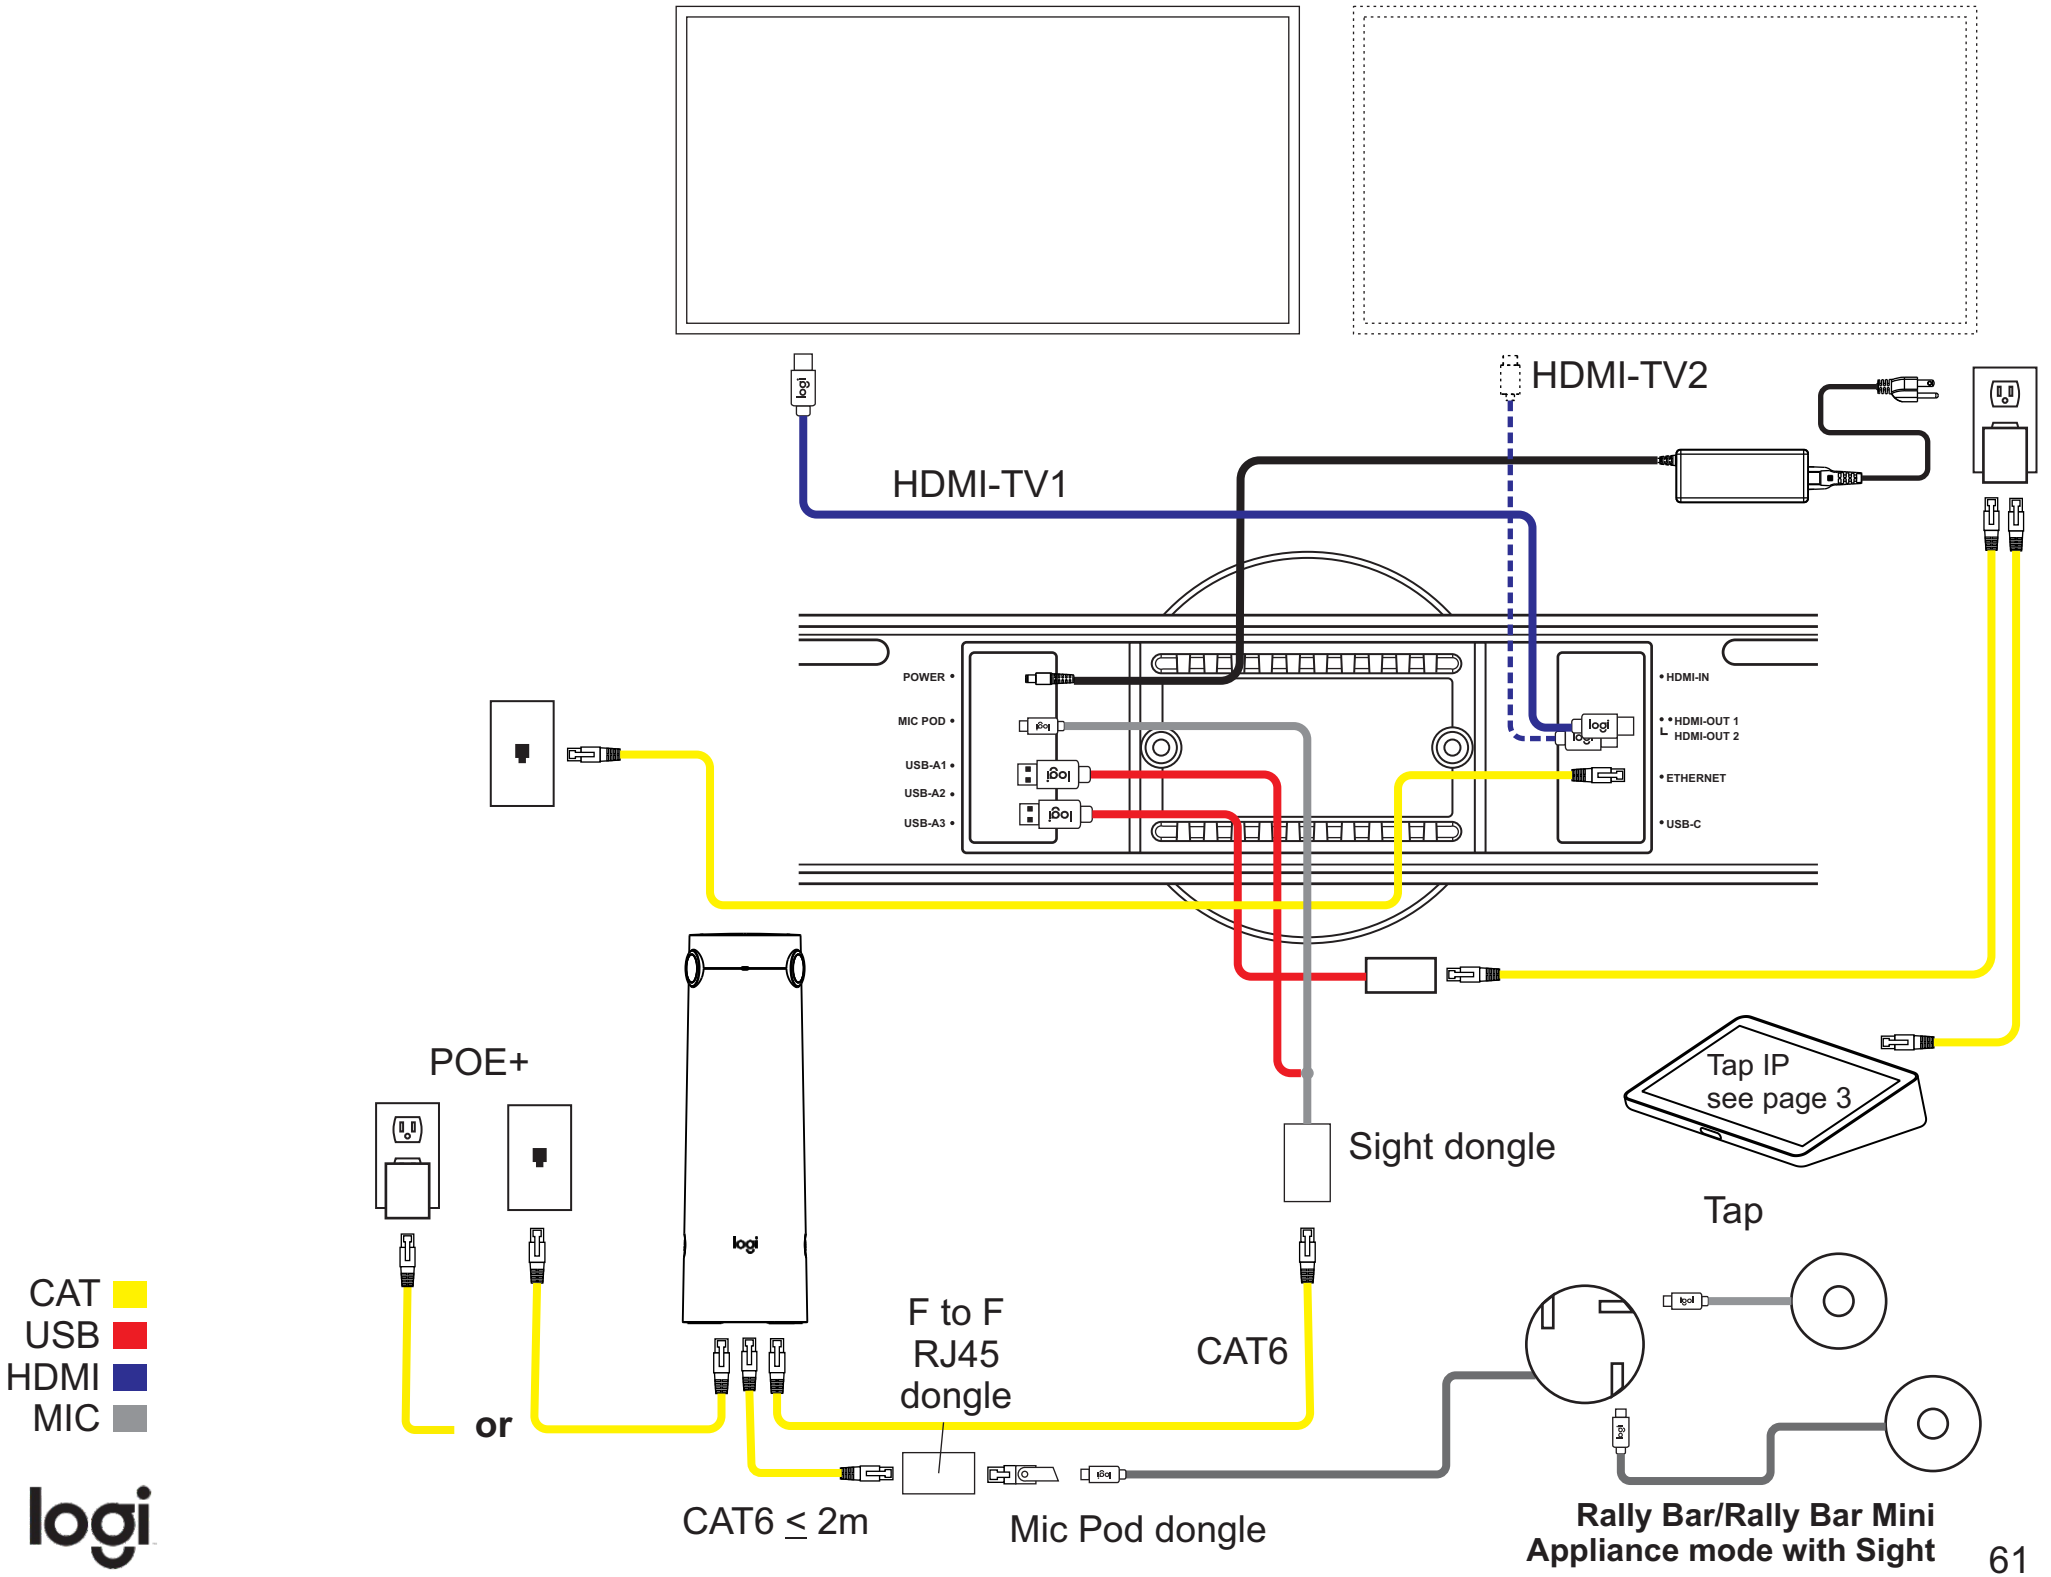


Rally Bar/Rally Bar Mini
Appliance mode with Sight

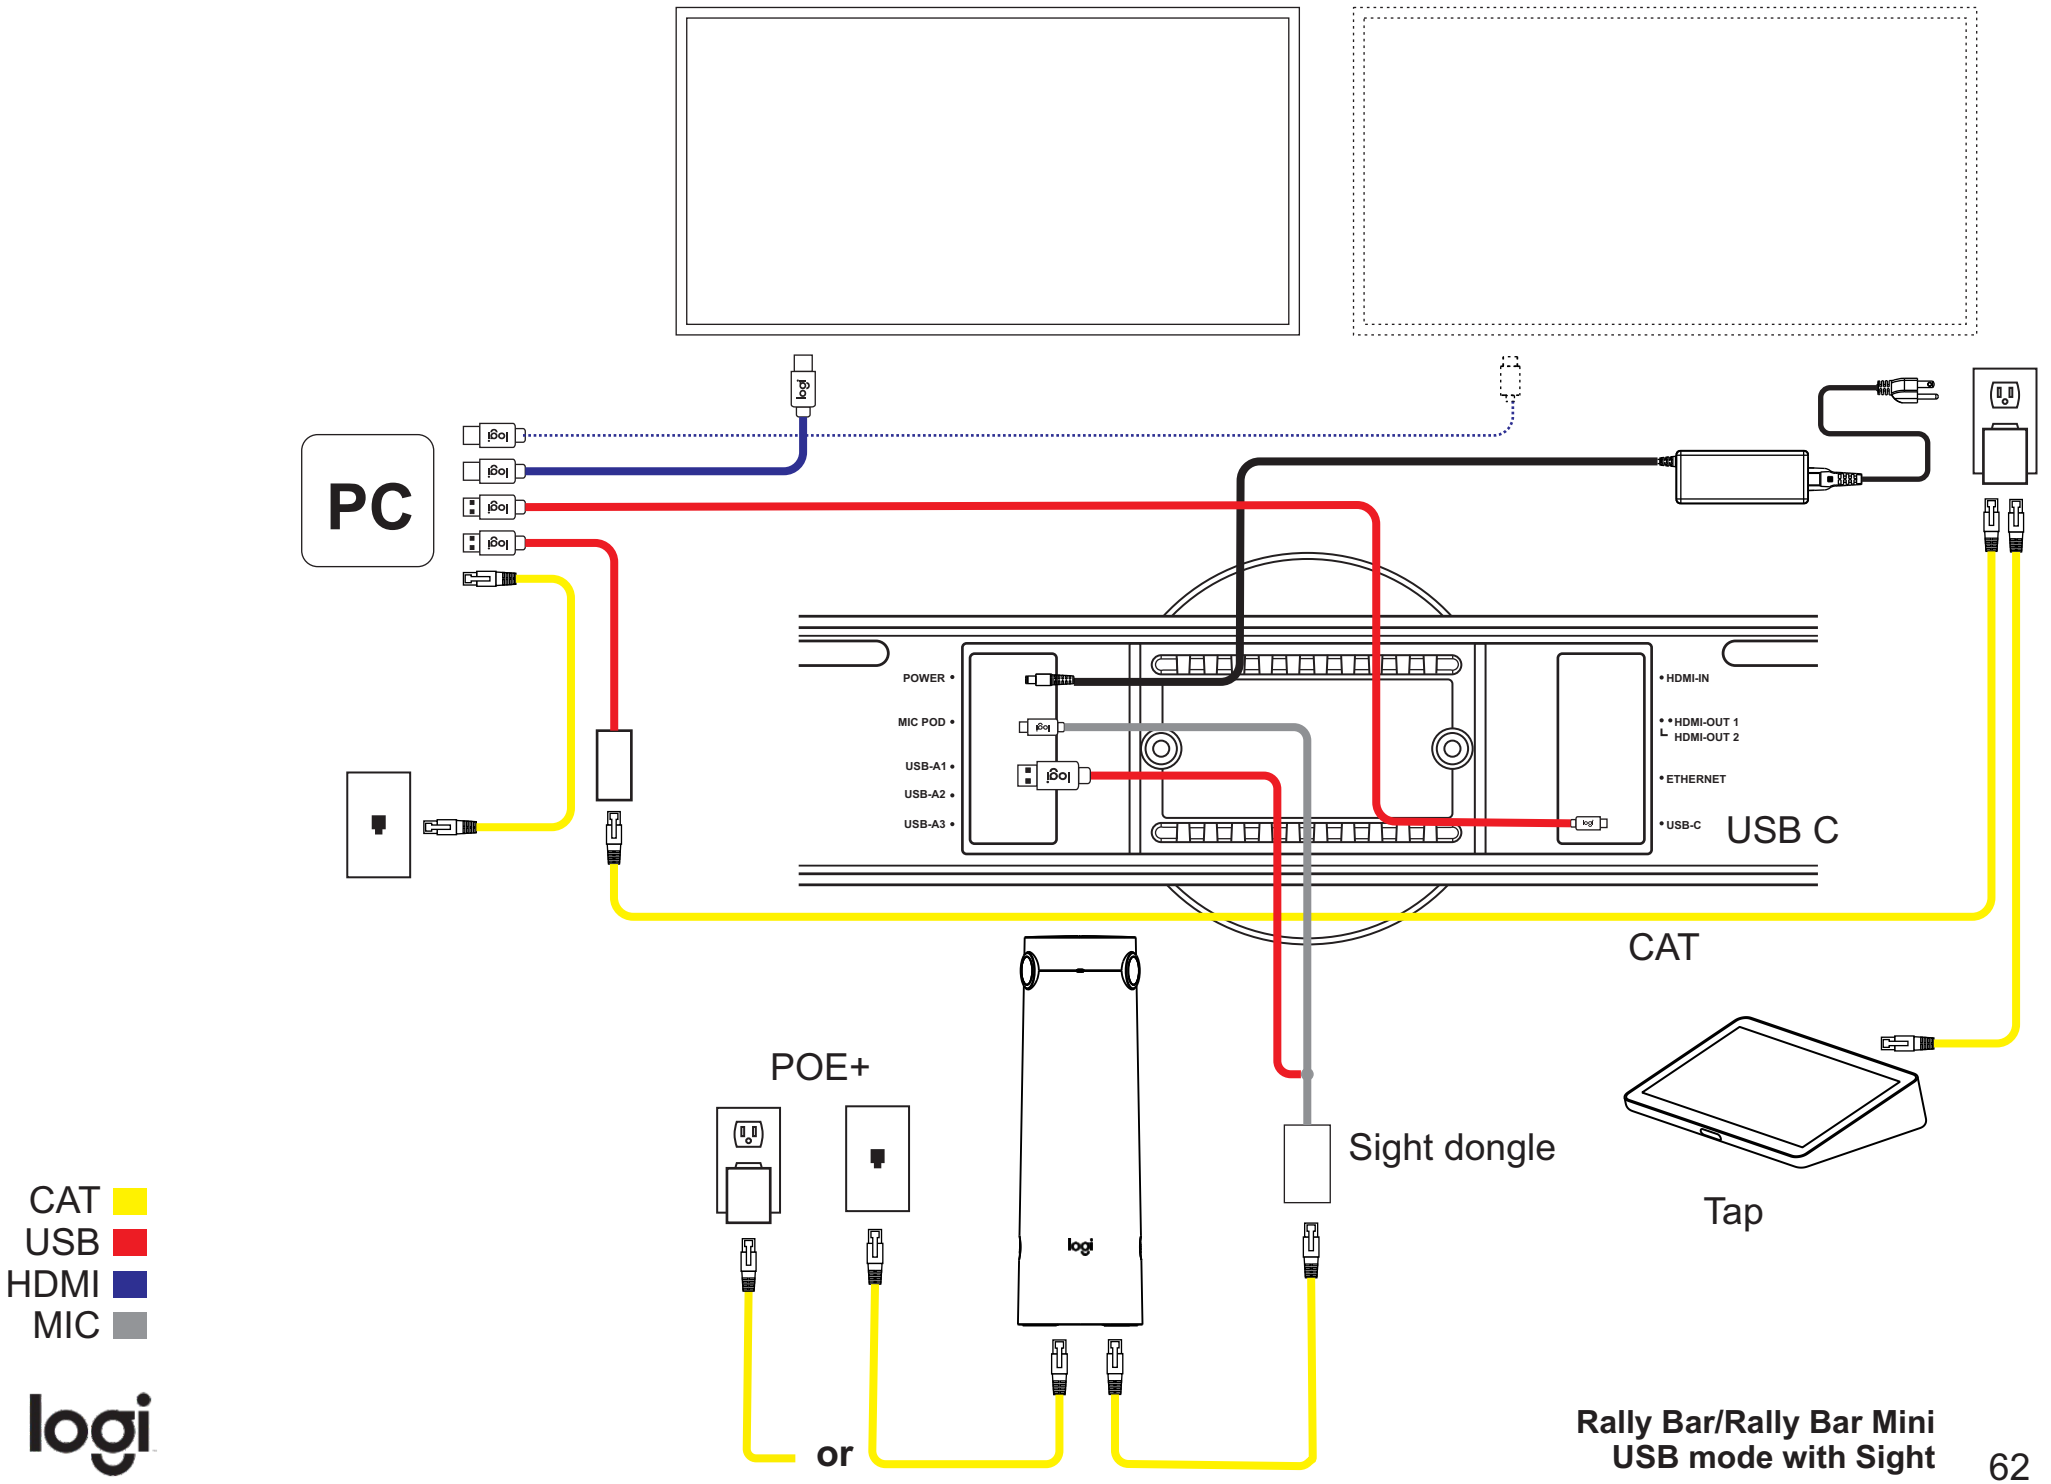


Rally Bar/Rally Bar Mini
USB mode with Sight

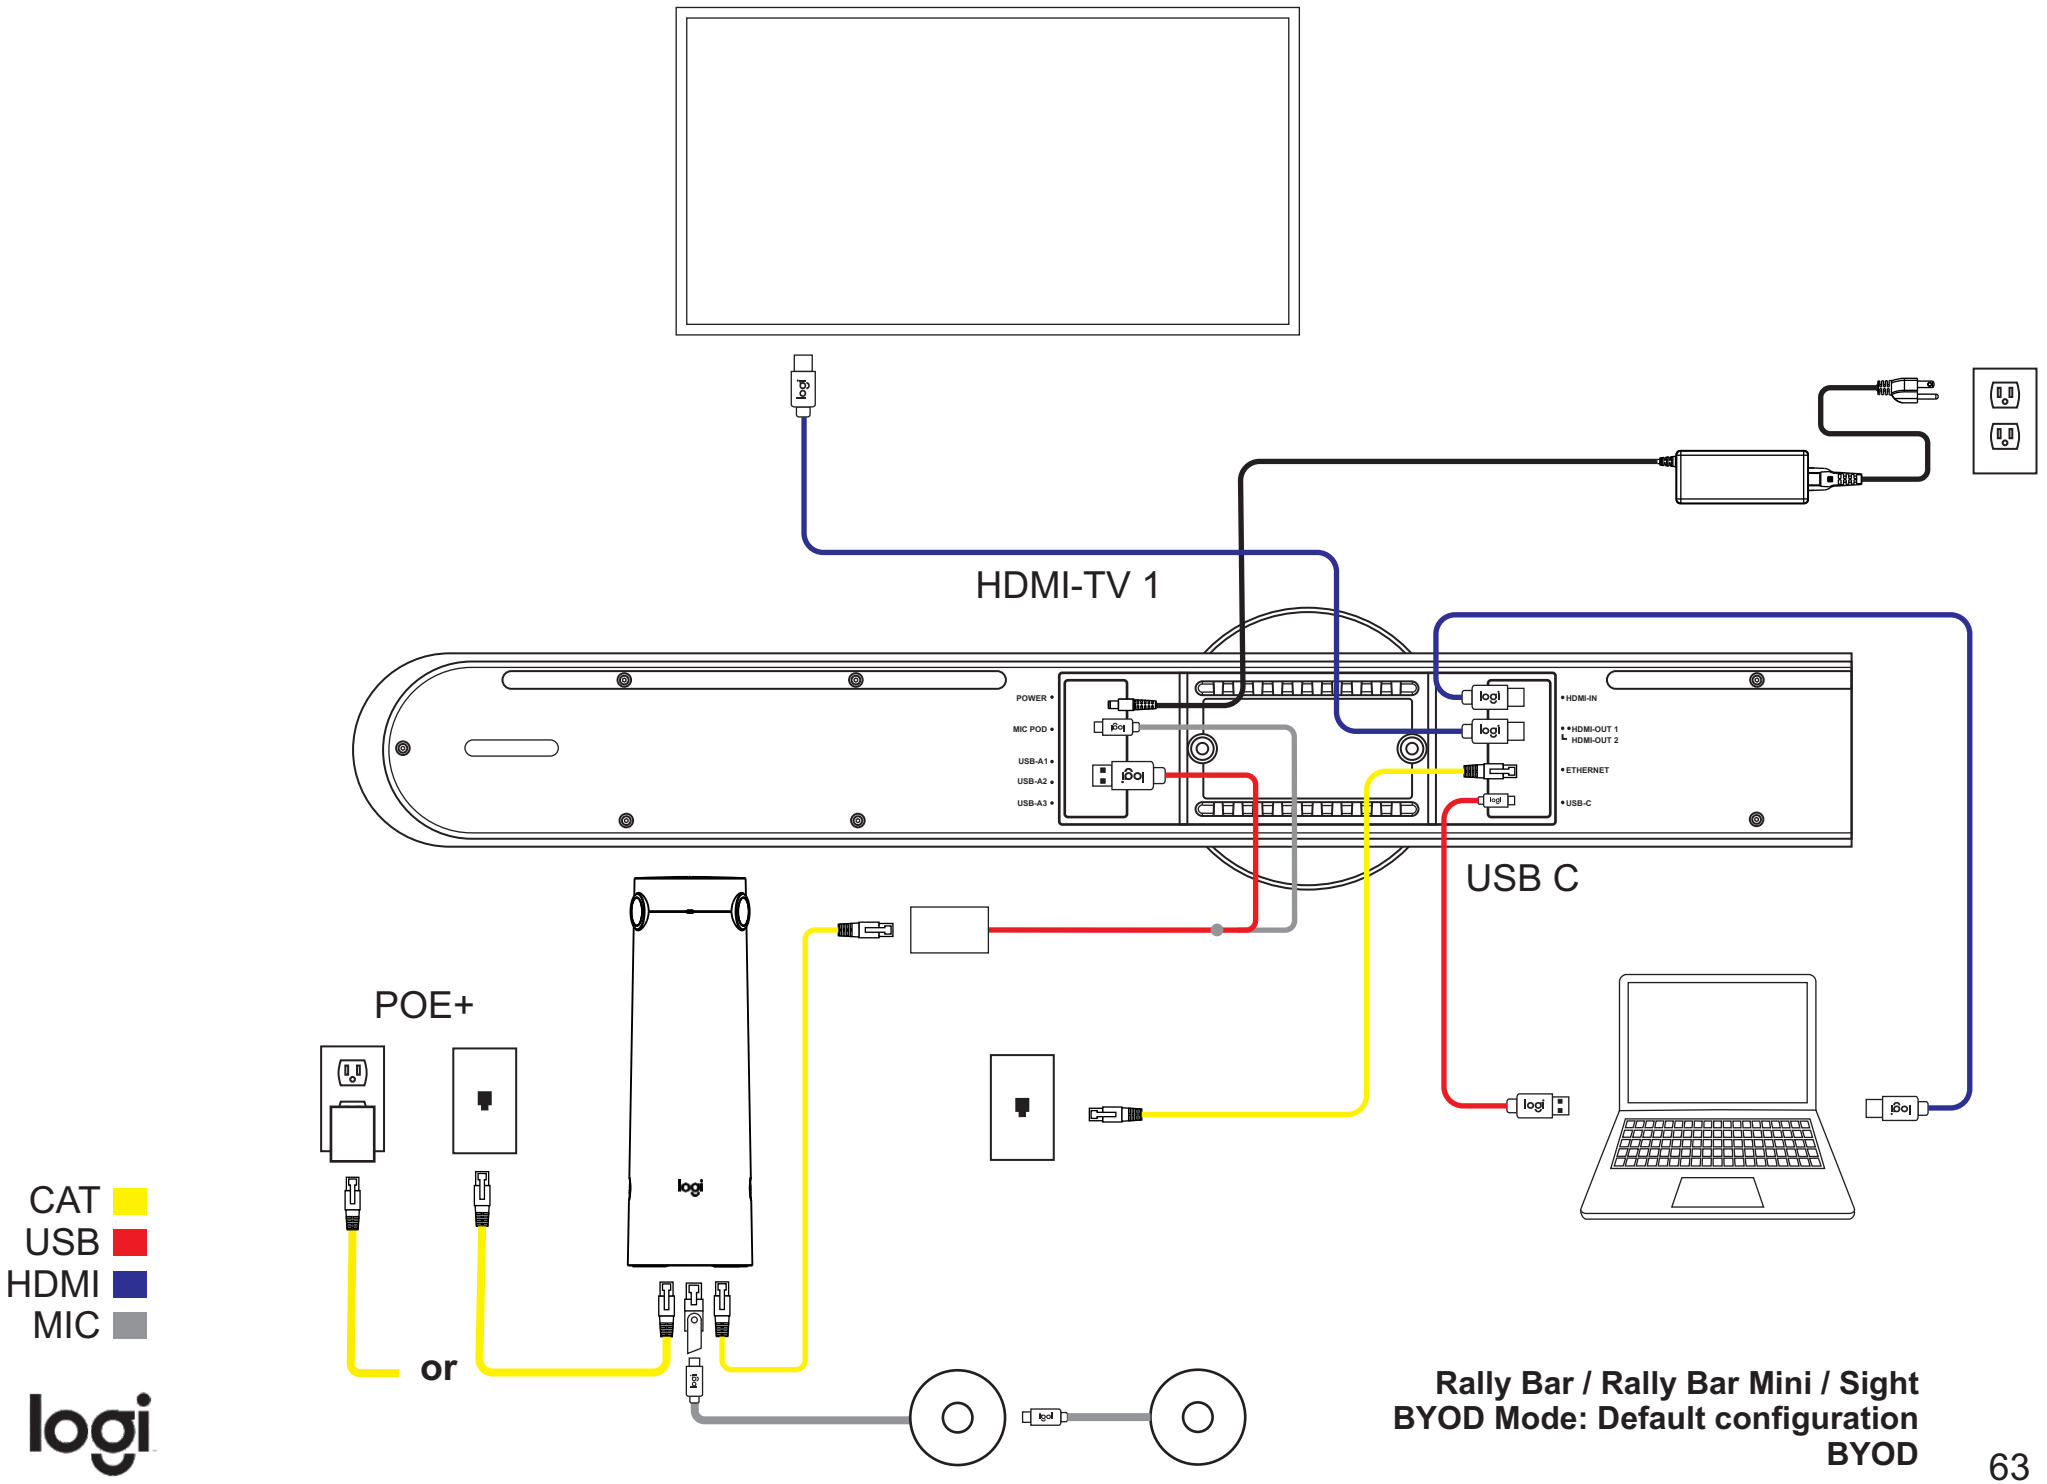


Rally Bar / Rally Bar Mini / Sight
BYOD Mode: Default configuration
BYOD

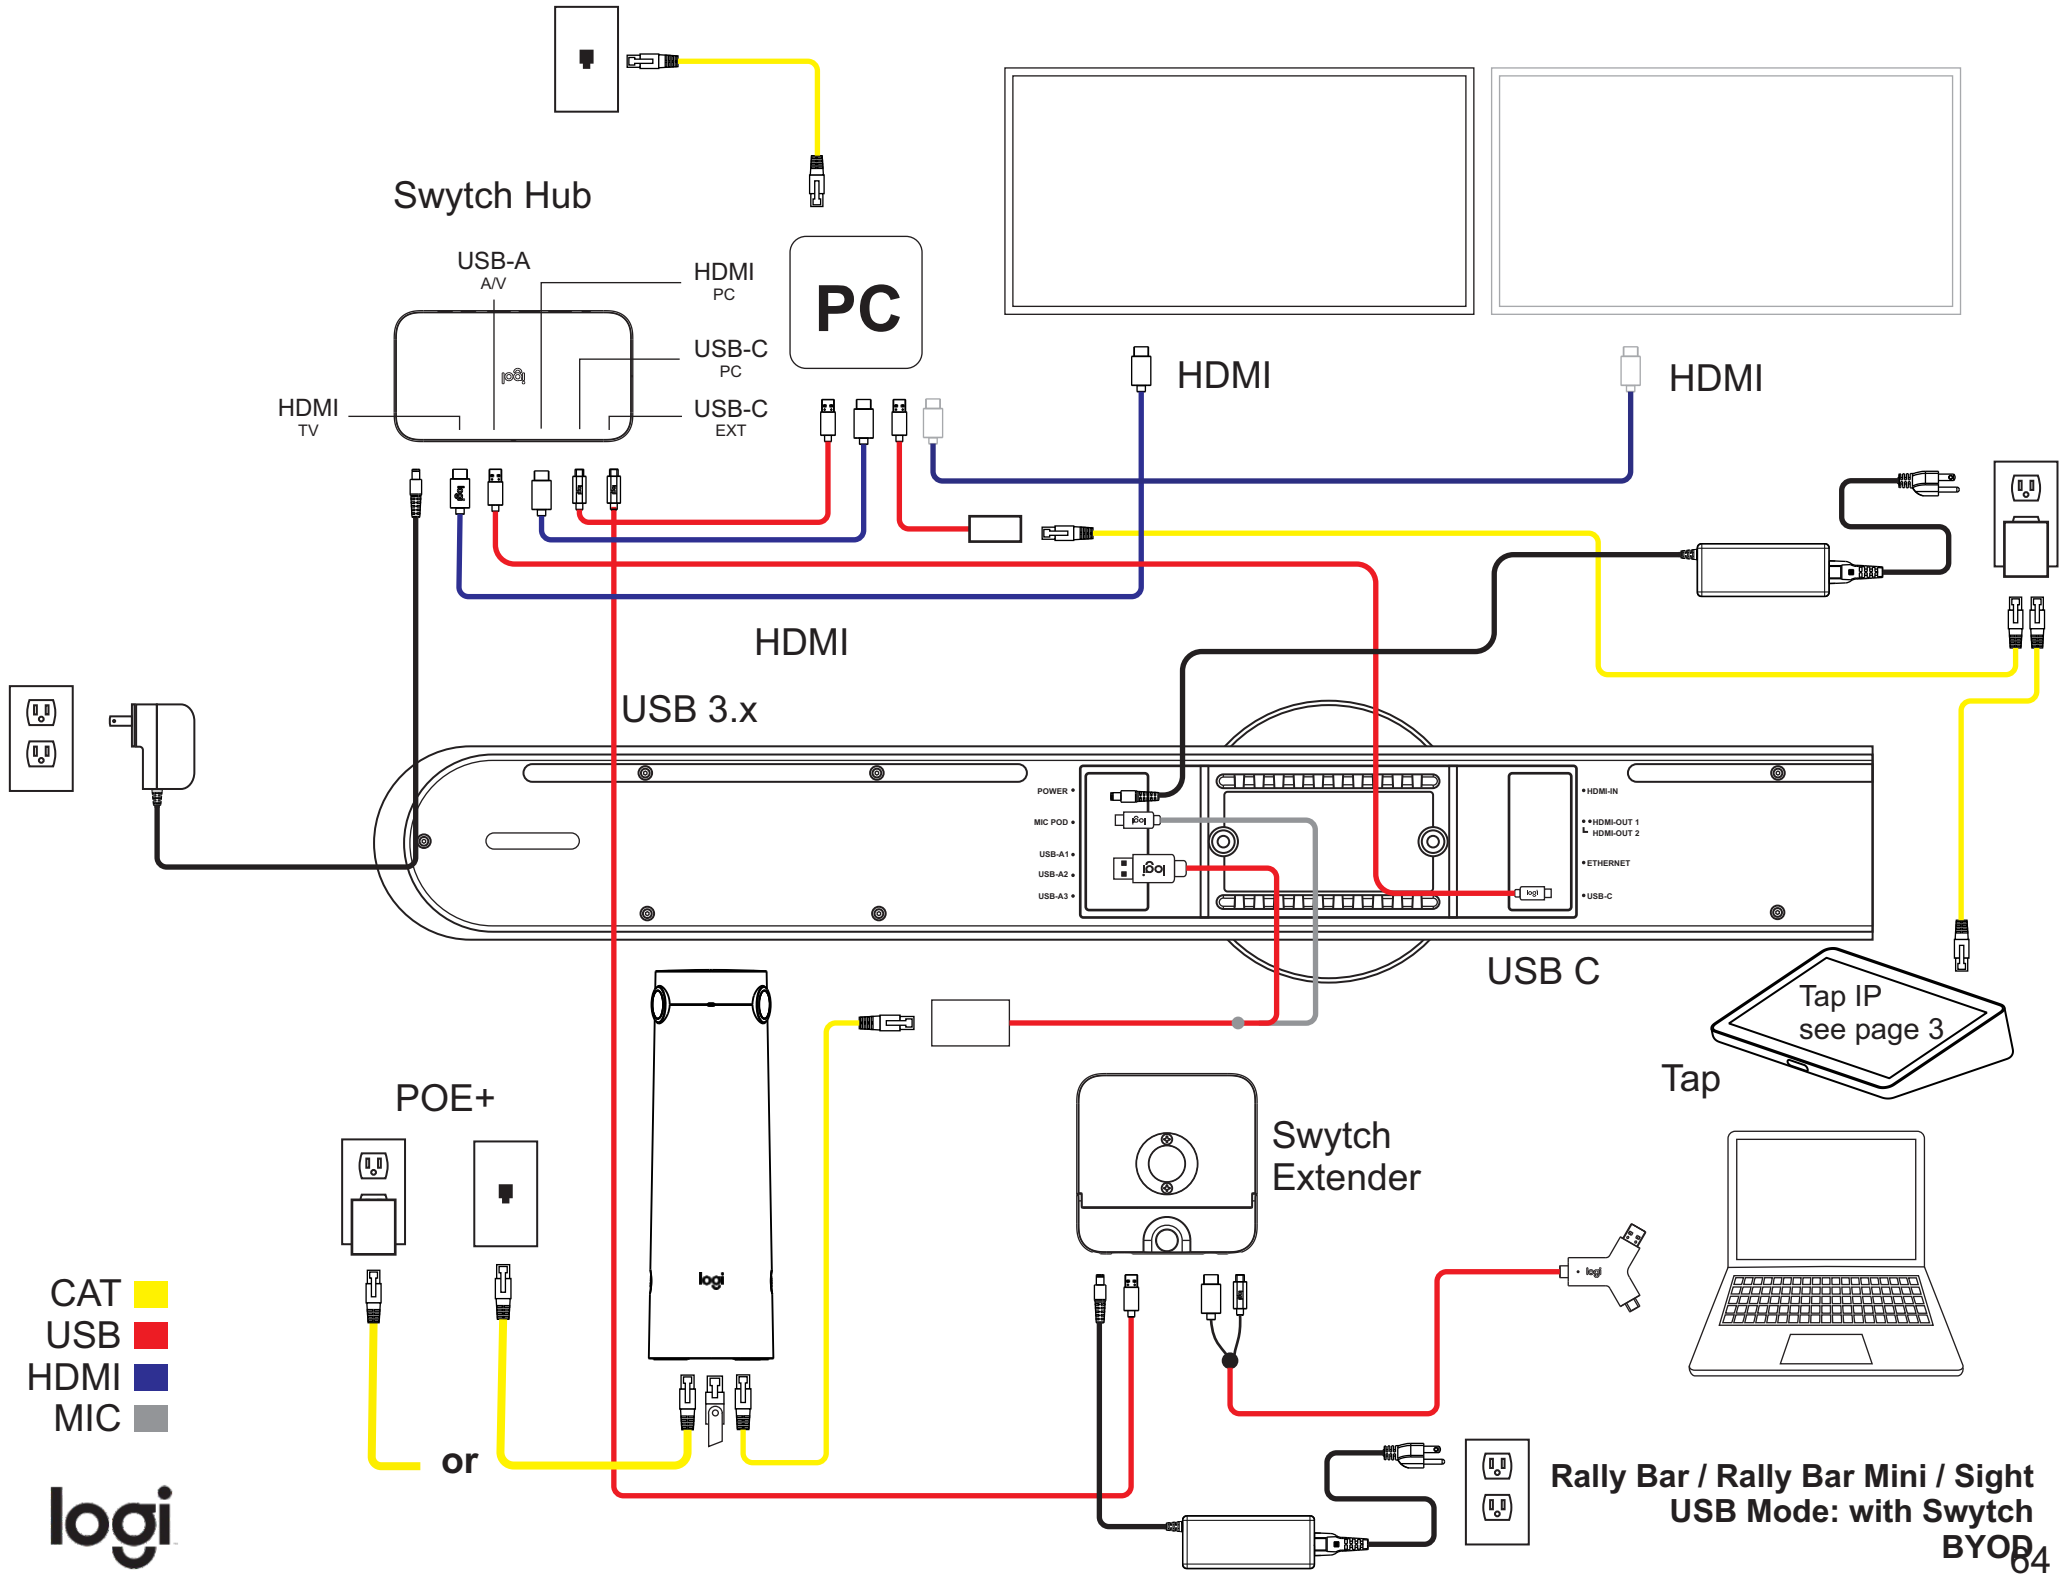


Rally Bar / Rally Bar Mini / Sight
USB Mode: with Swytch
BYOD

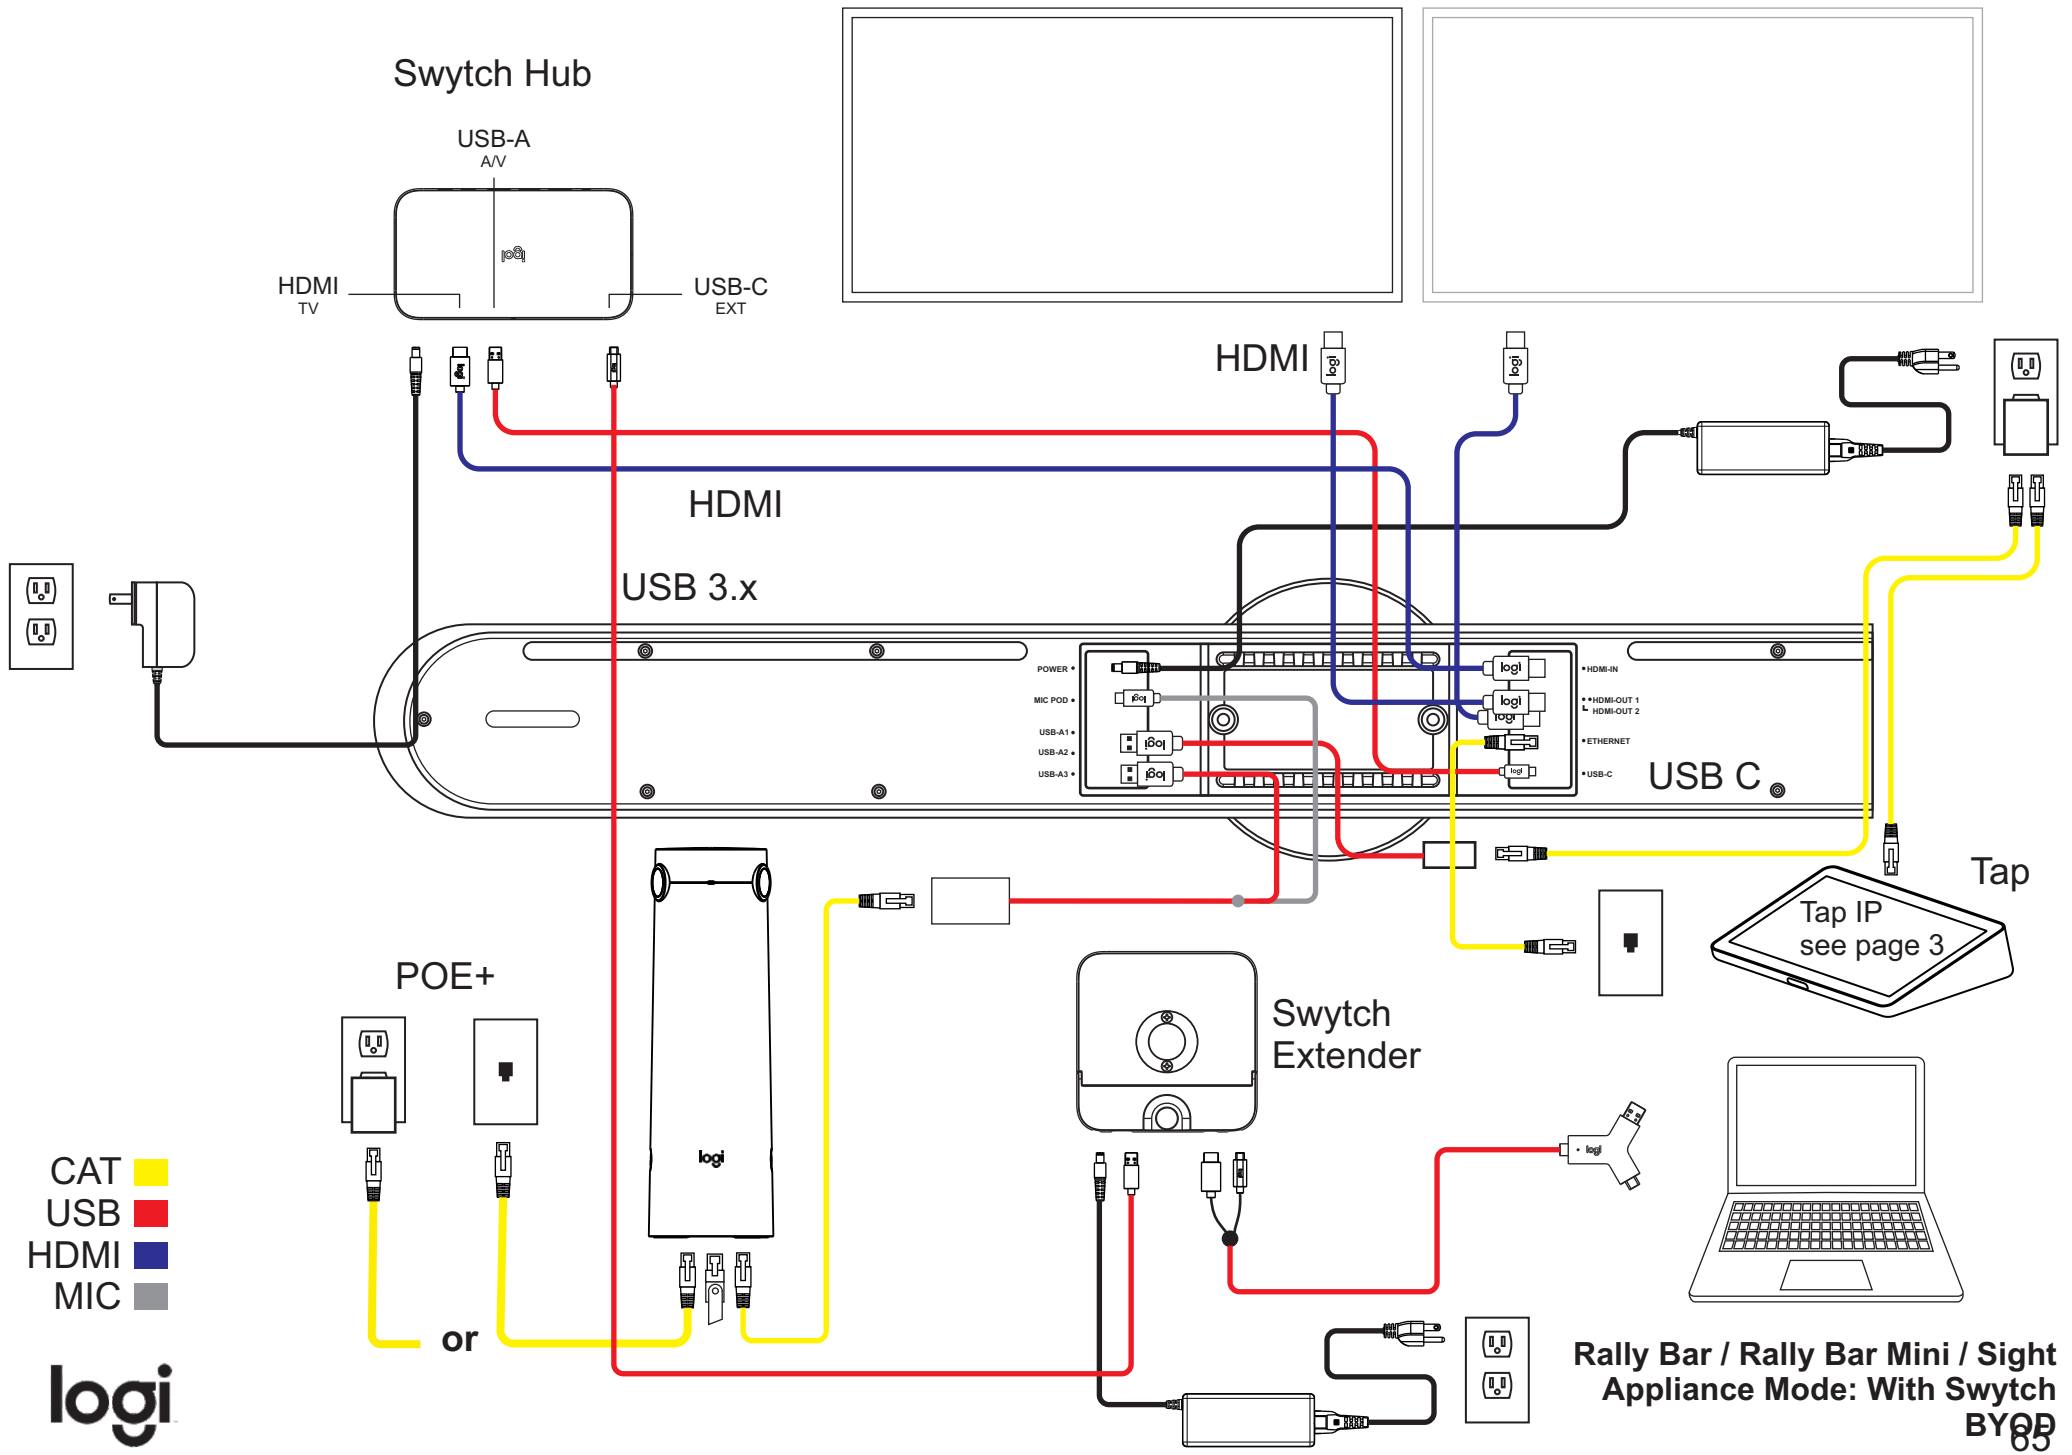


Rally Bar / Rally Bar Mini / Sight
Appliance Mode: With Swytch
BYOD

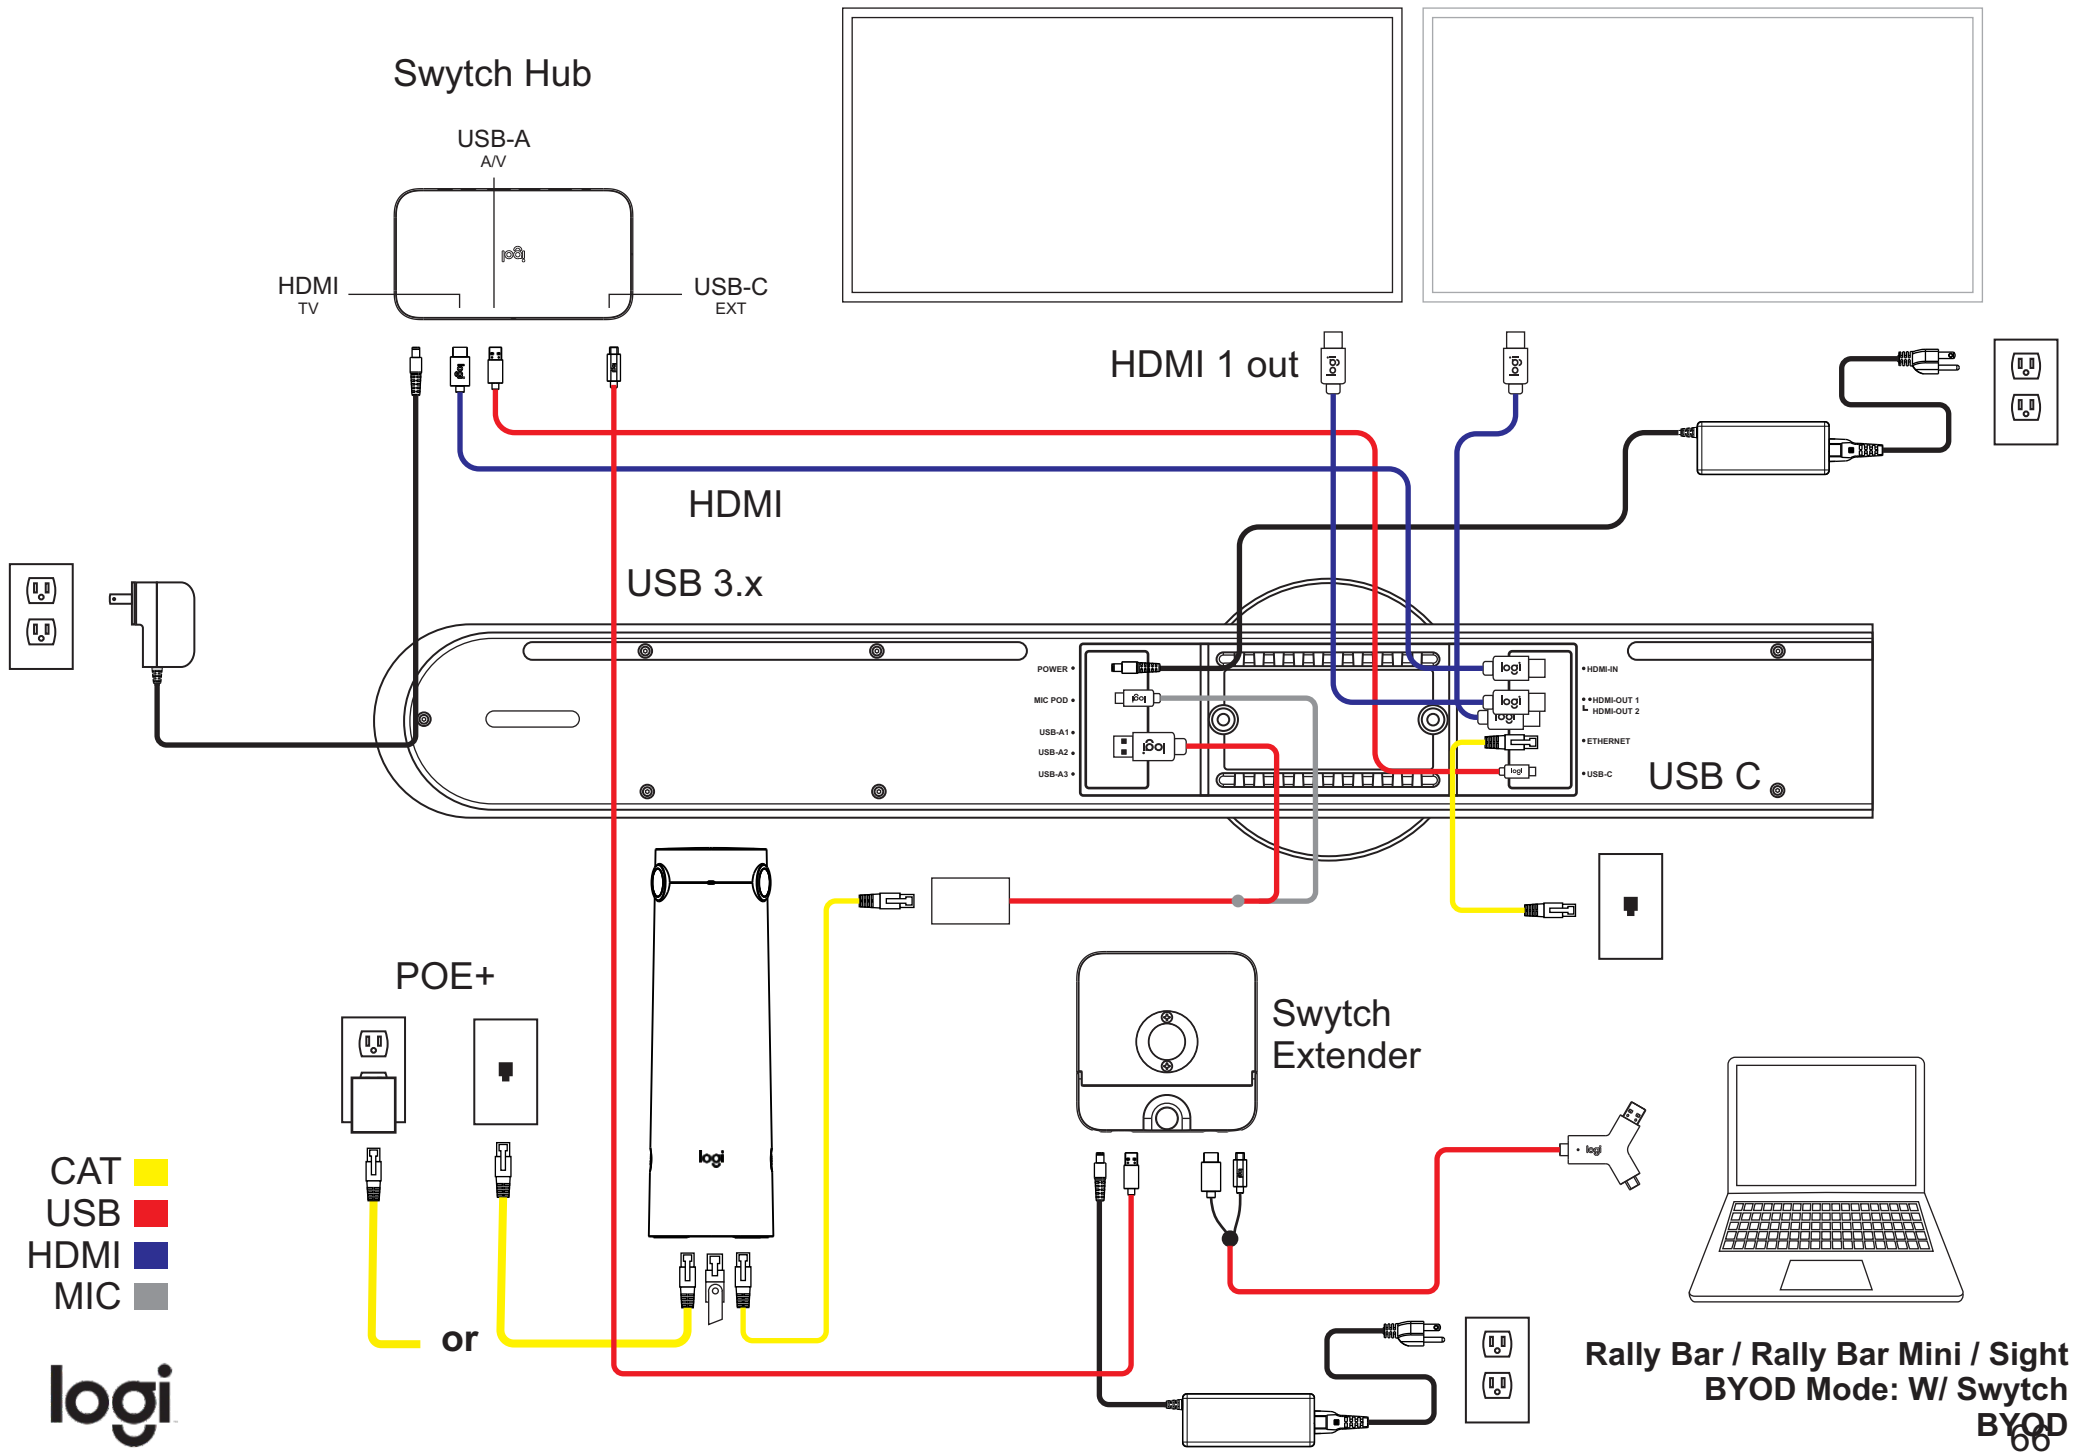


Rally Bar / Rally Bar Mini / Sight
BYOD Mode: W/ Swytch
BYOD

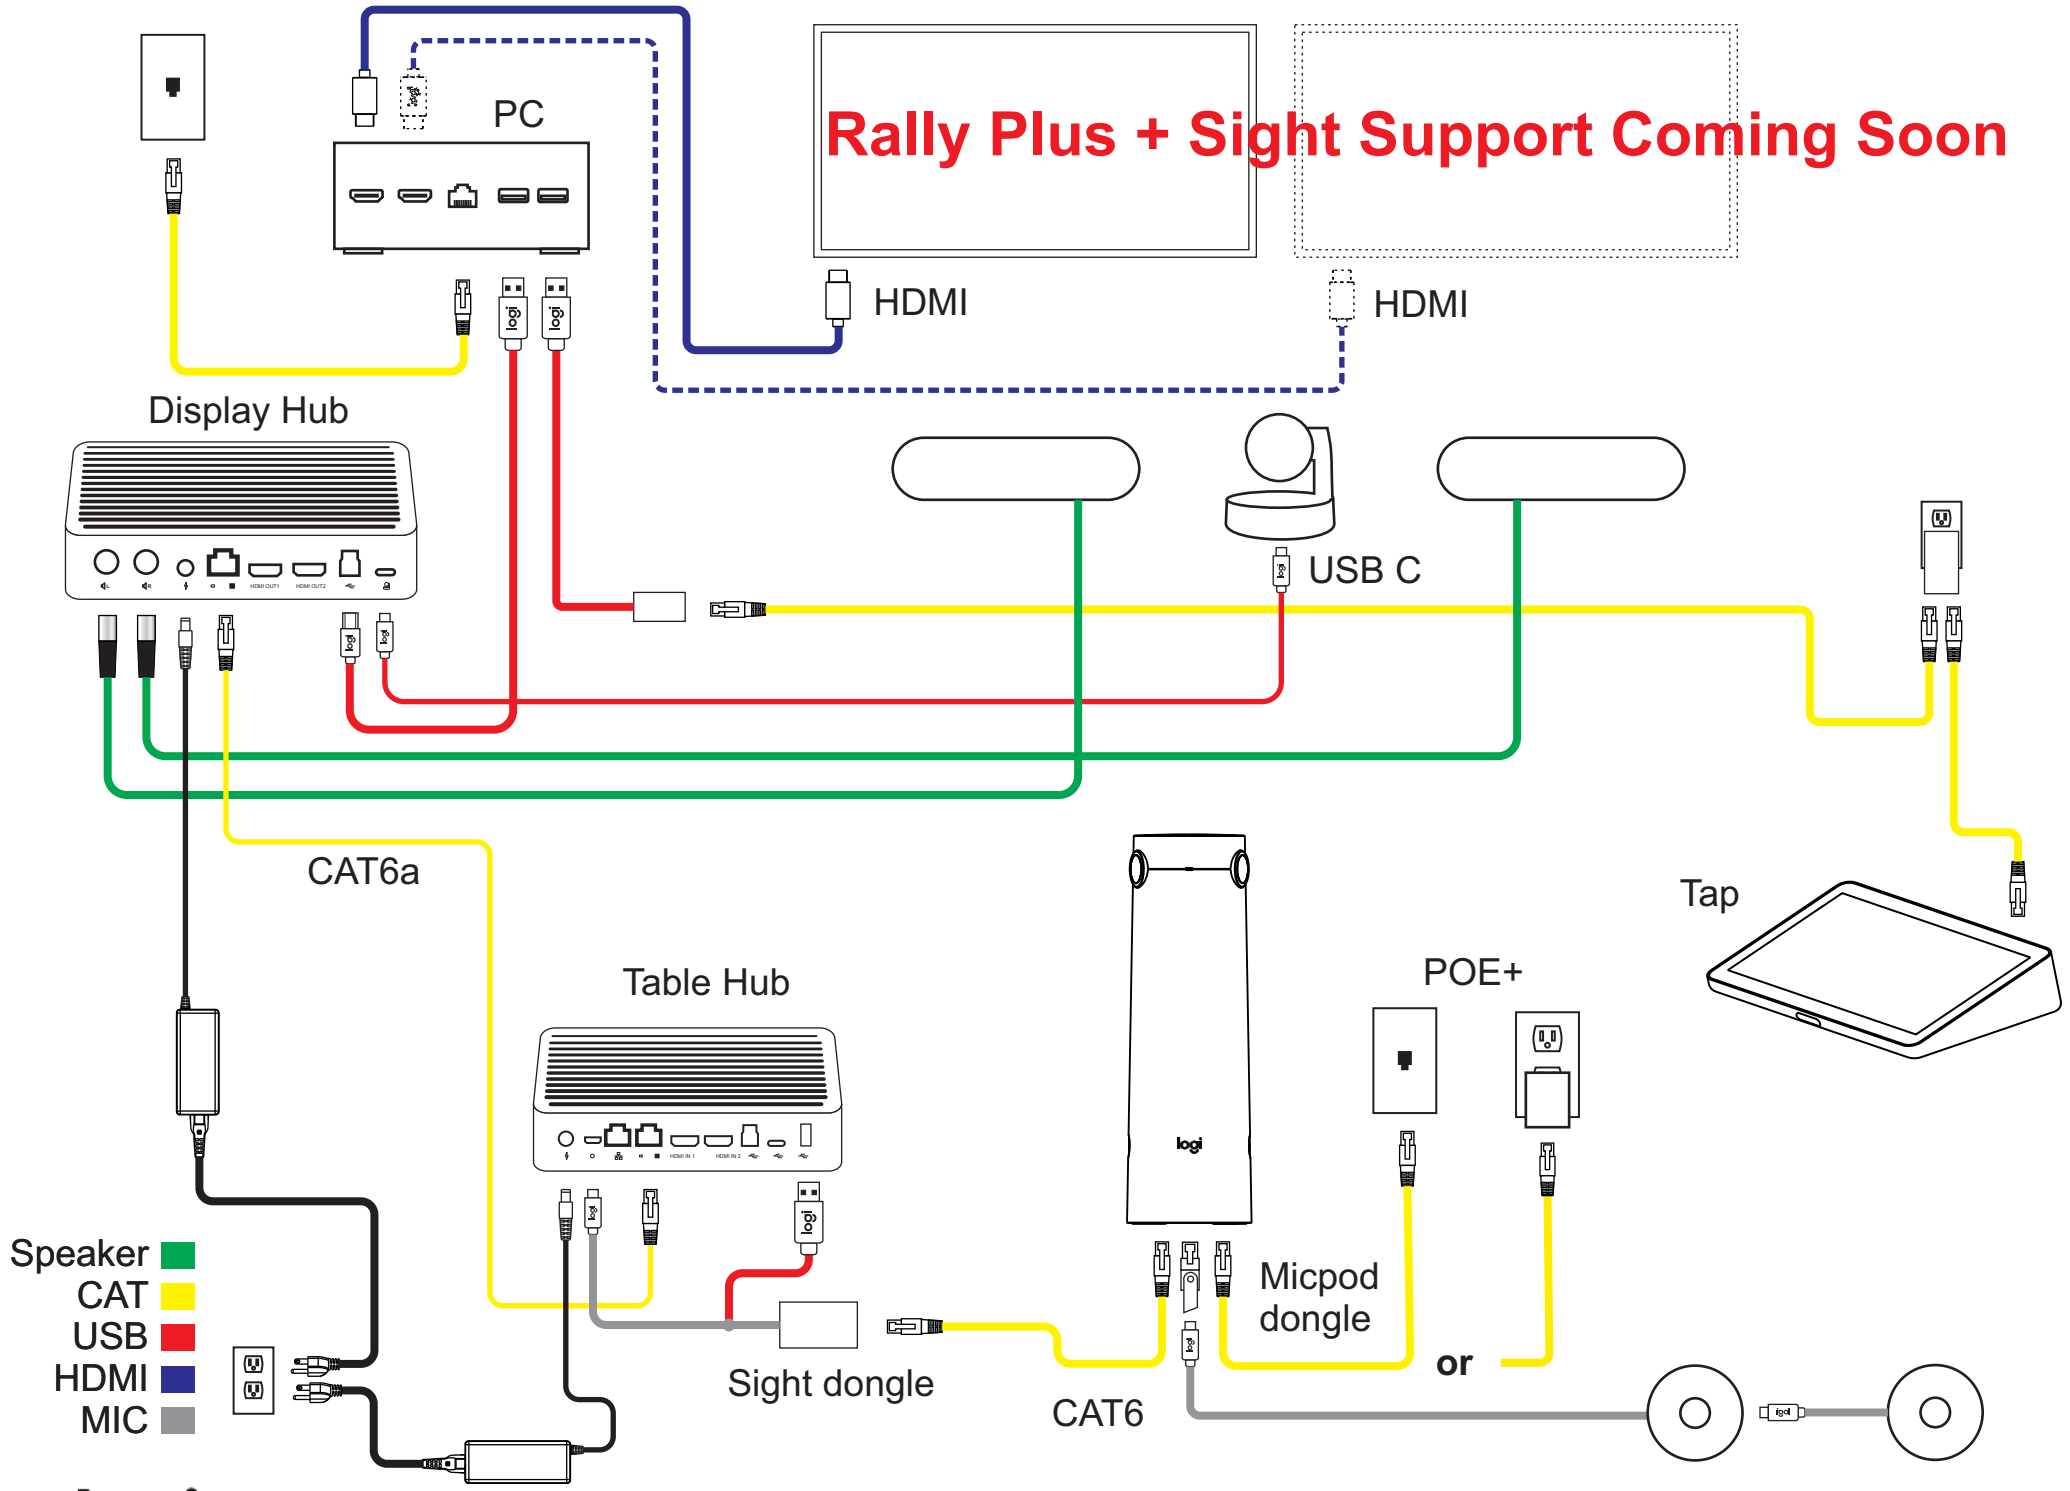

Rally Plus: PC at Display Hub Sight

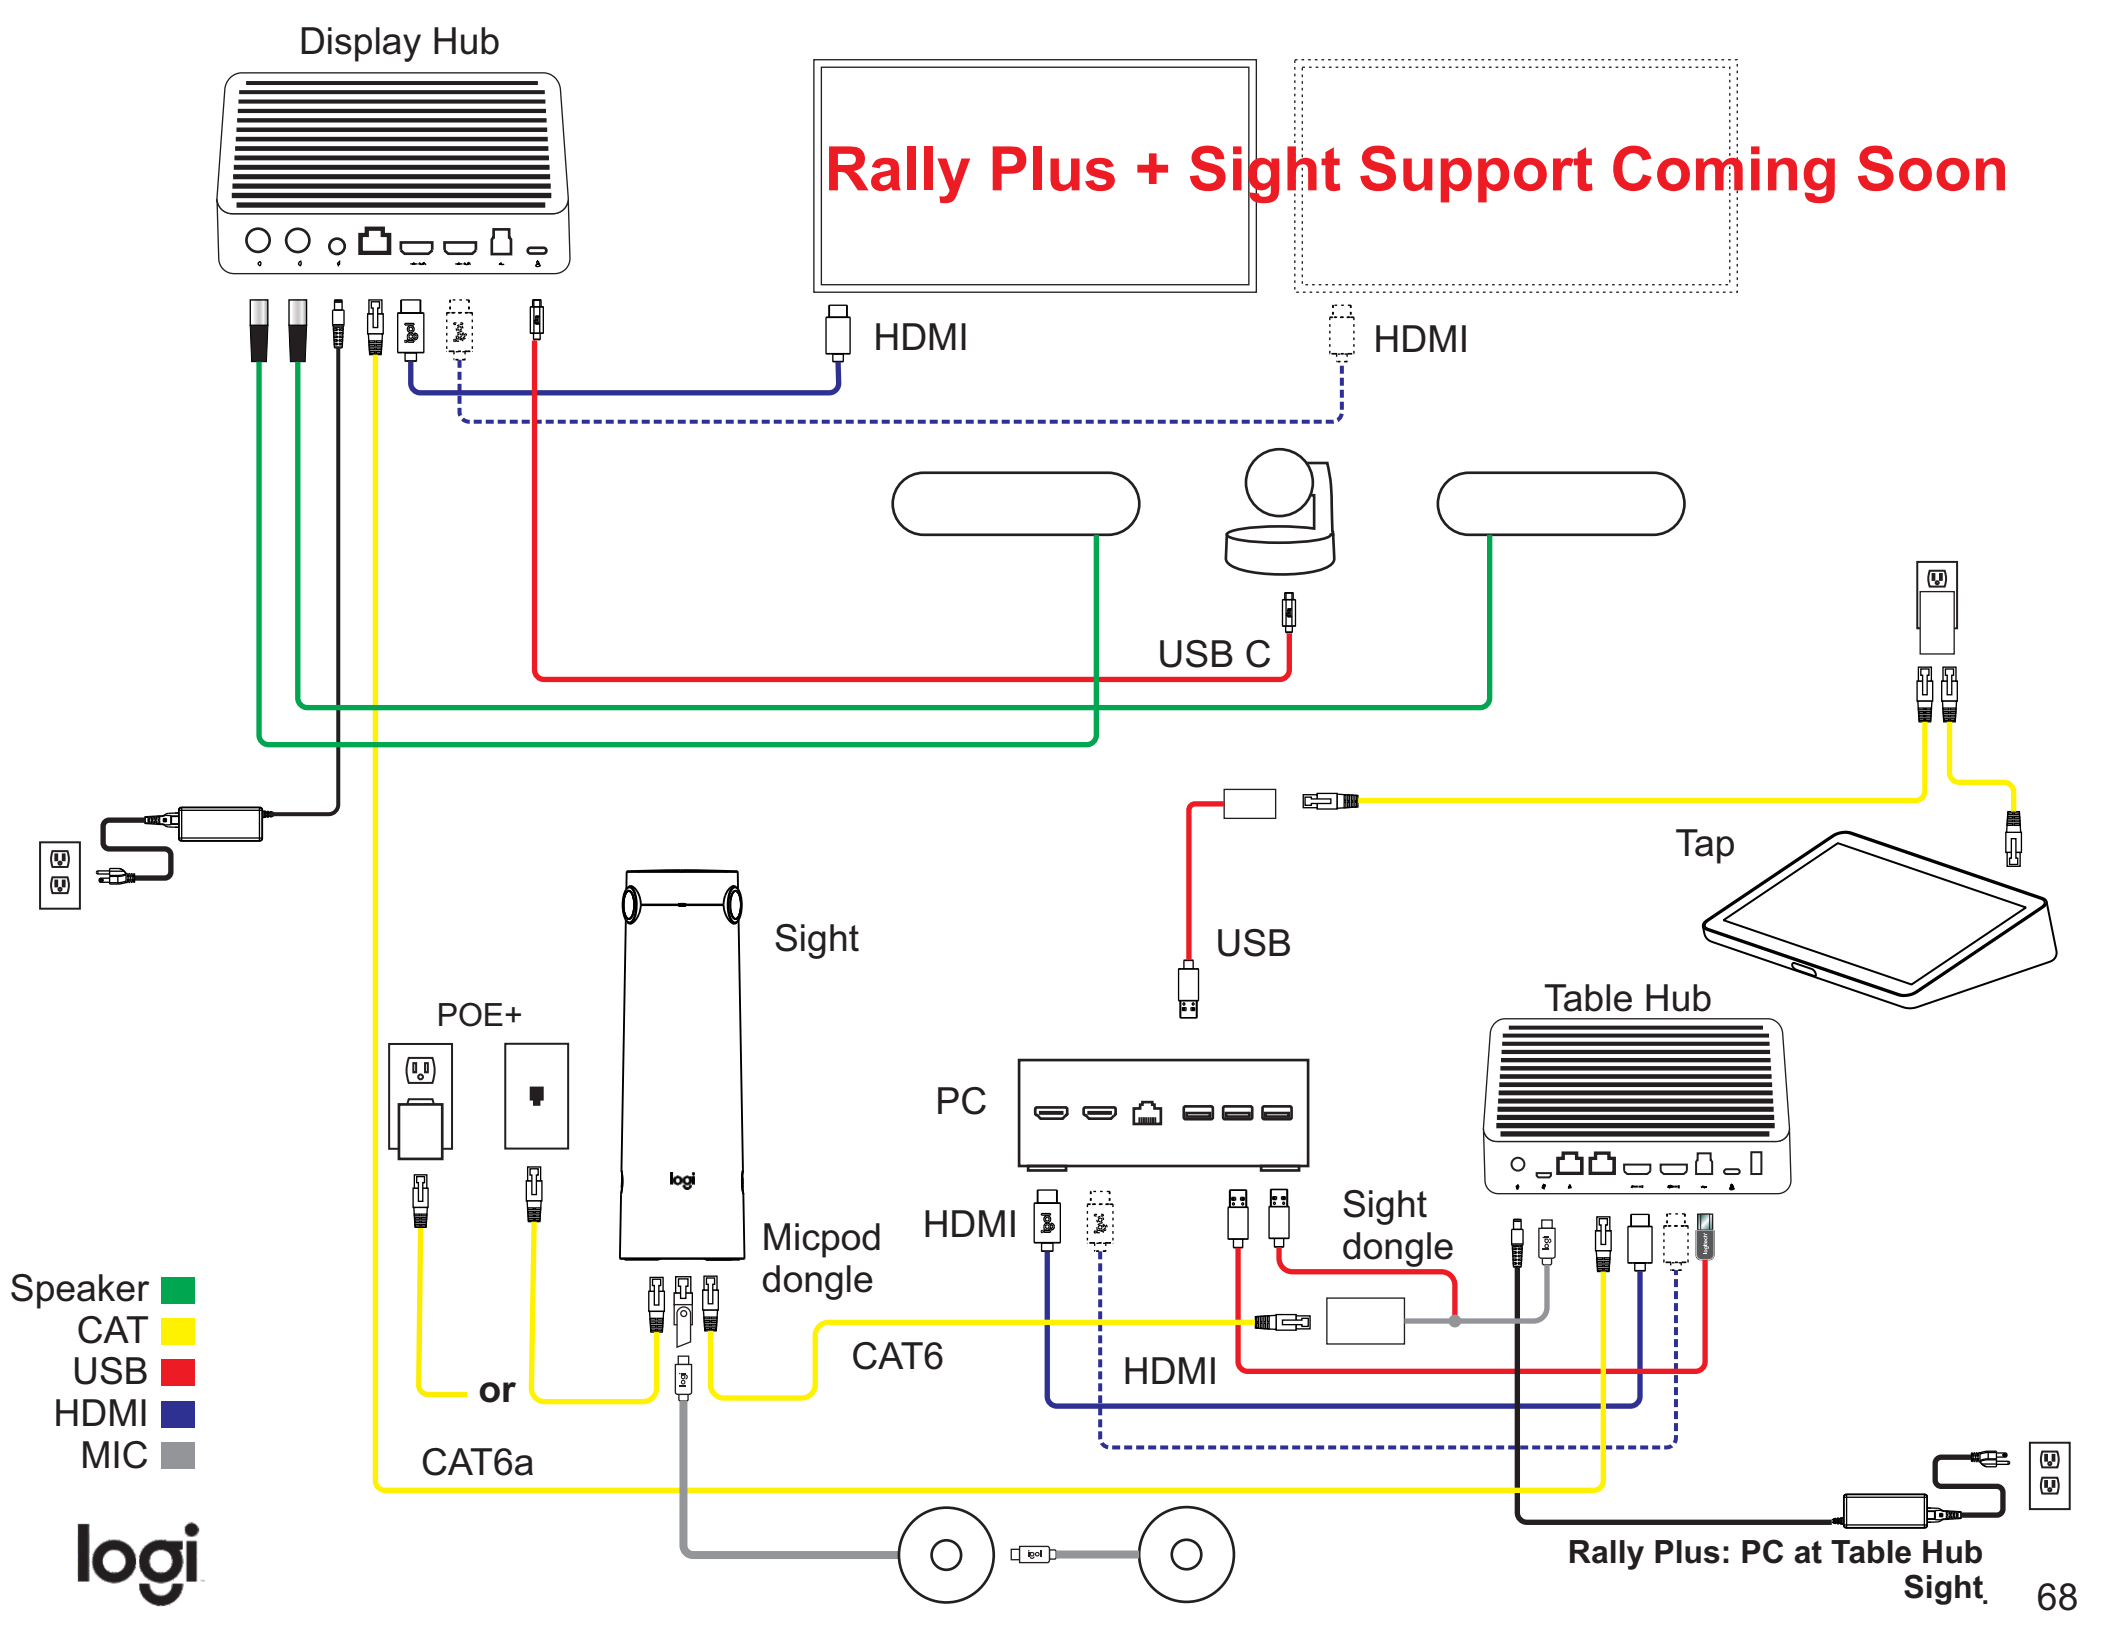

Display Hub
Rally Plus + Sight Support Coming Soon
HDMI
HDMI
USB C
Tap
USB
Table Hub
Sight
POE+
PC
HDMI
Micpod dongle
Sight dongle
CAT6
HDMI
or
CAT6a
Speaker
CAT
USB
HDMI
MIC
Rally Plus: PC at Table Hub
Sight

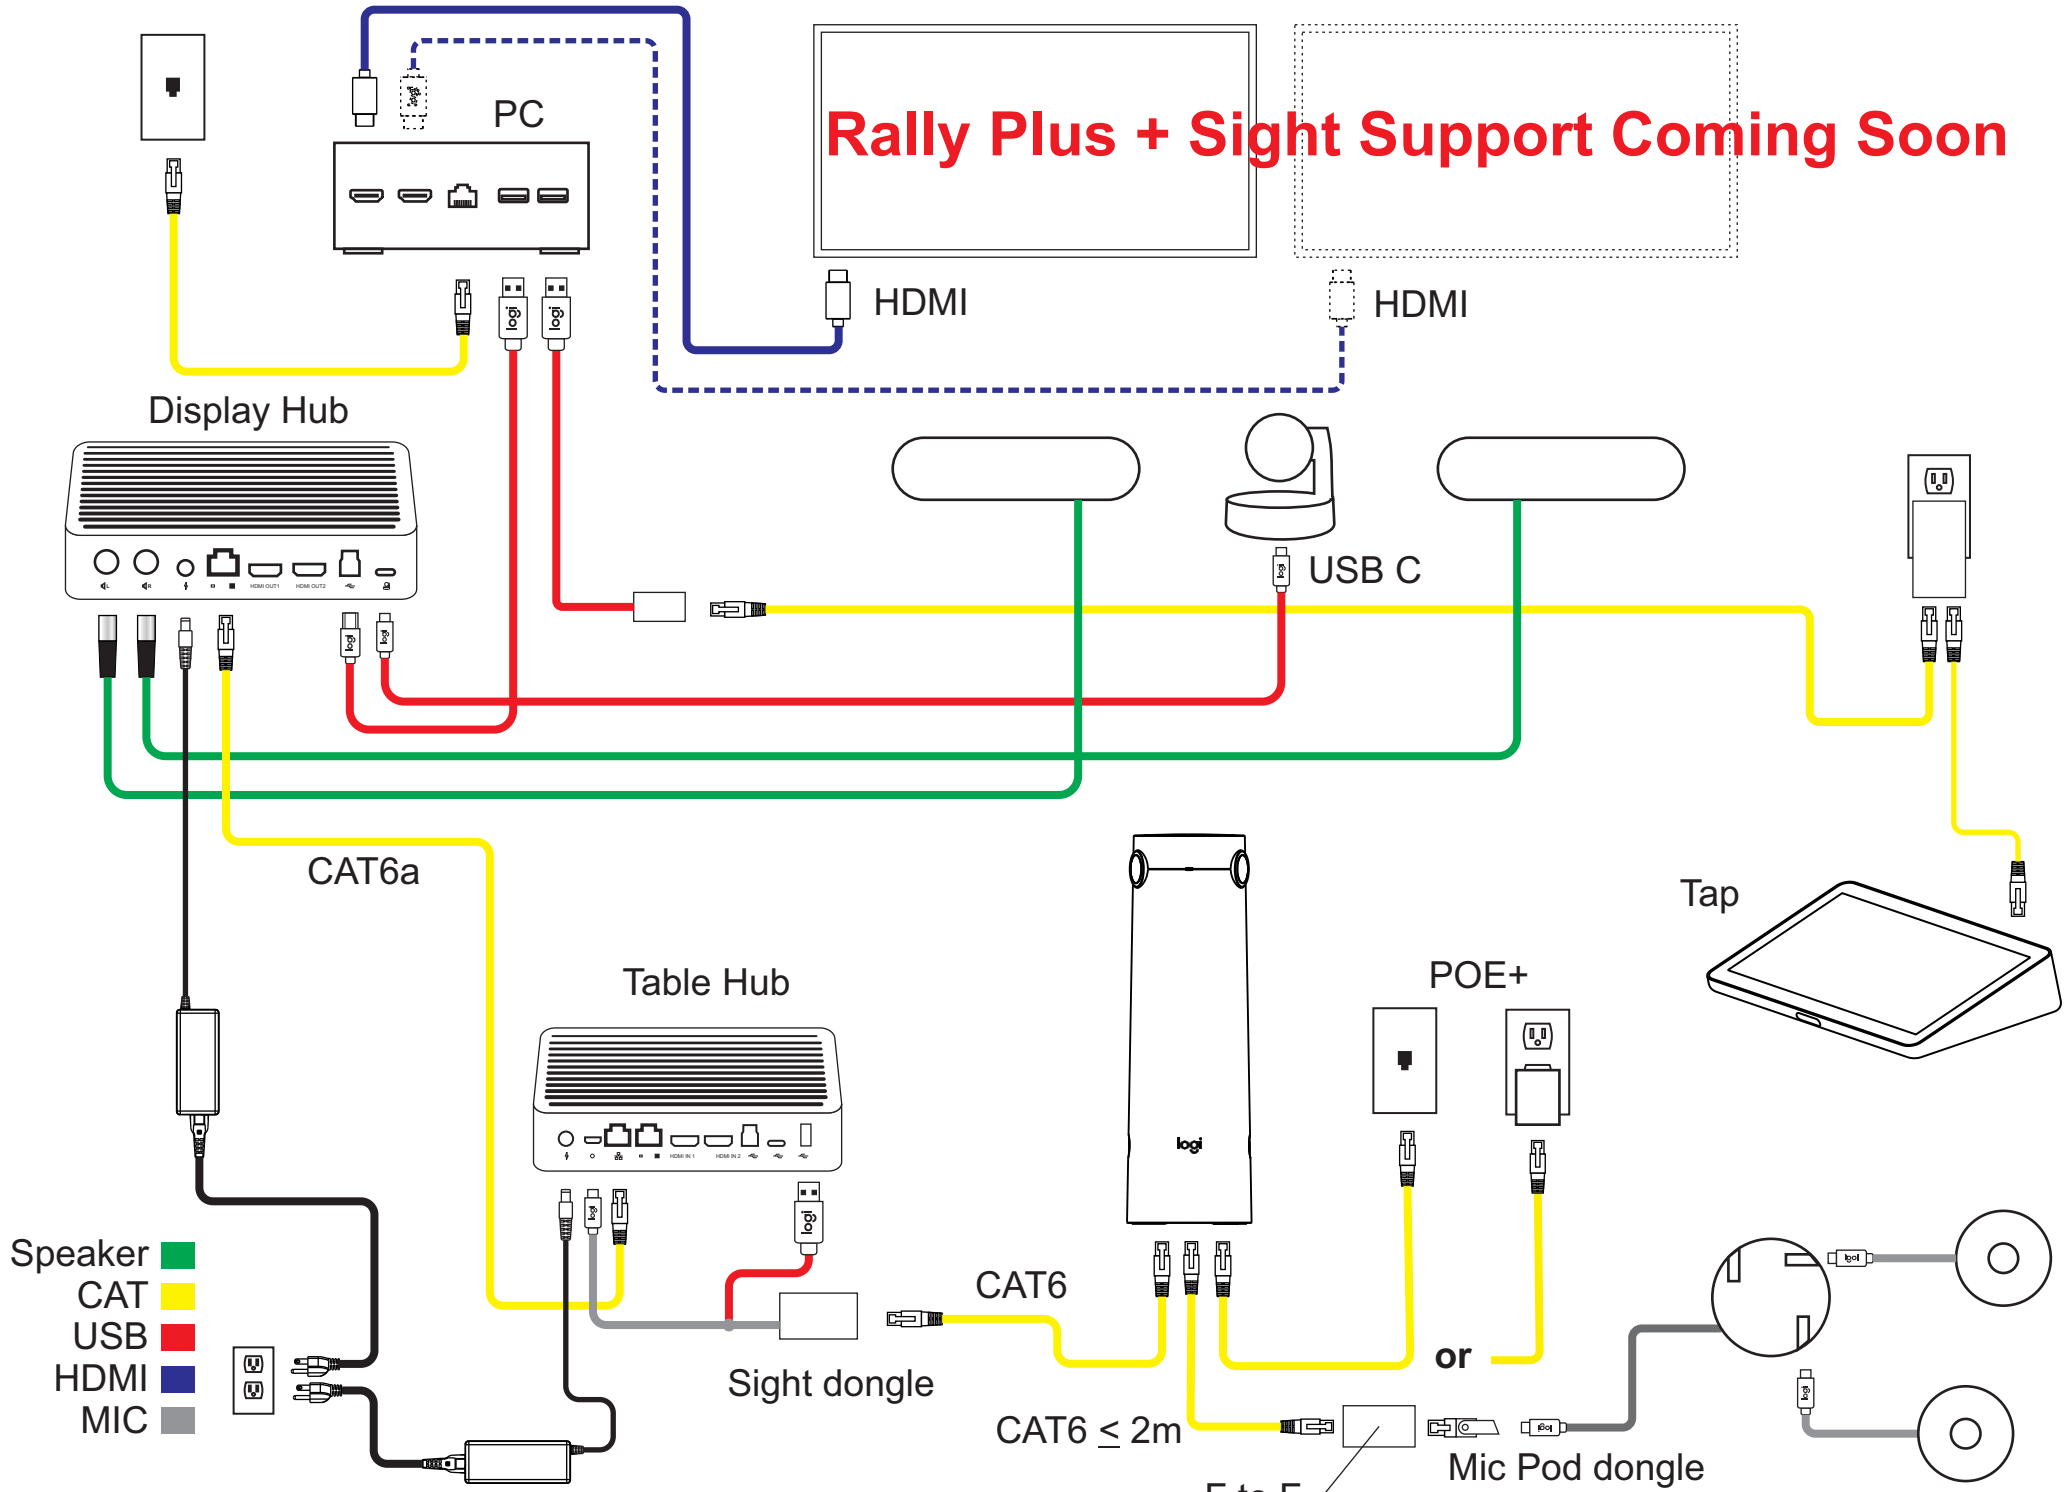

Rally Plus: PC at Display Hub
Sight


RALLY BAR HUDDLE IN APPLIANCE MODE

Table of Contents

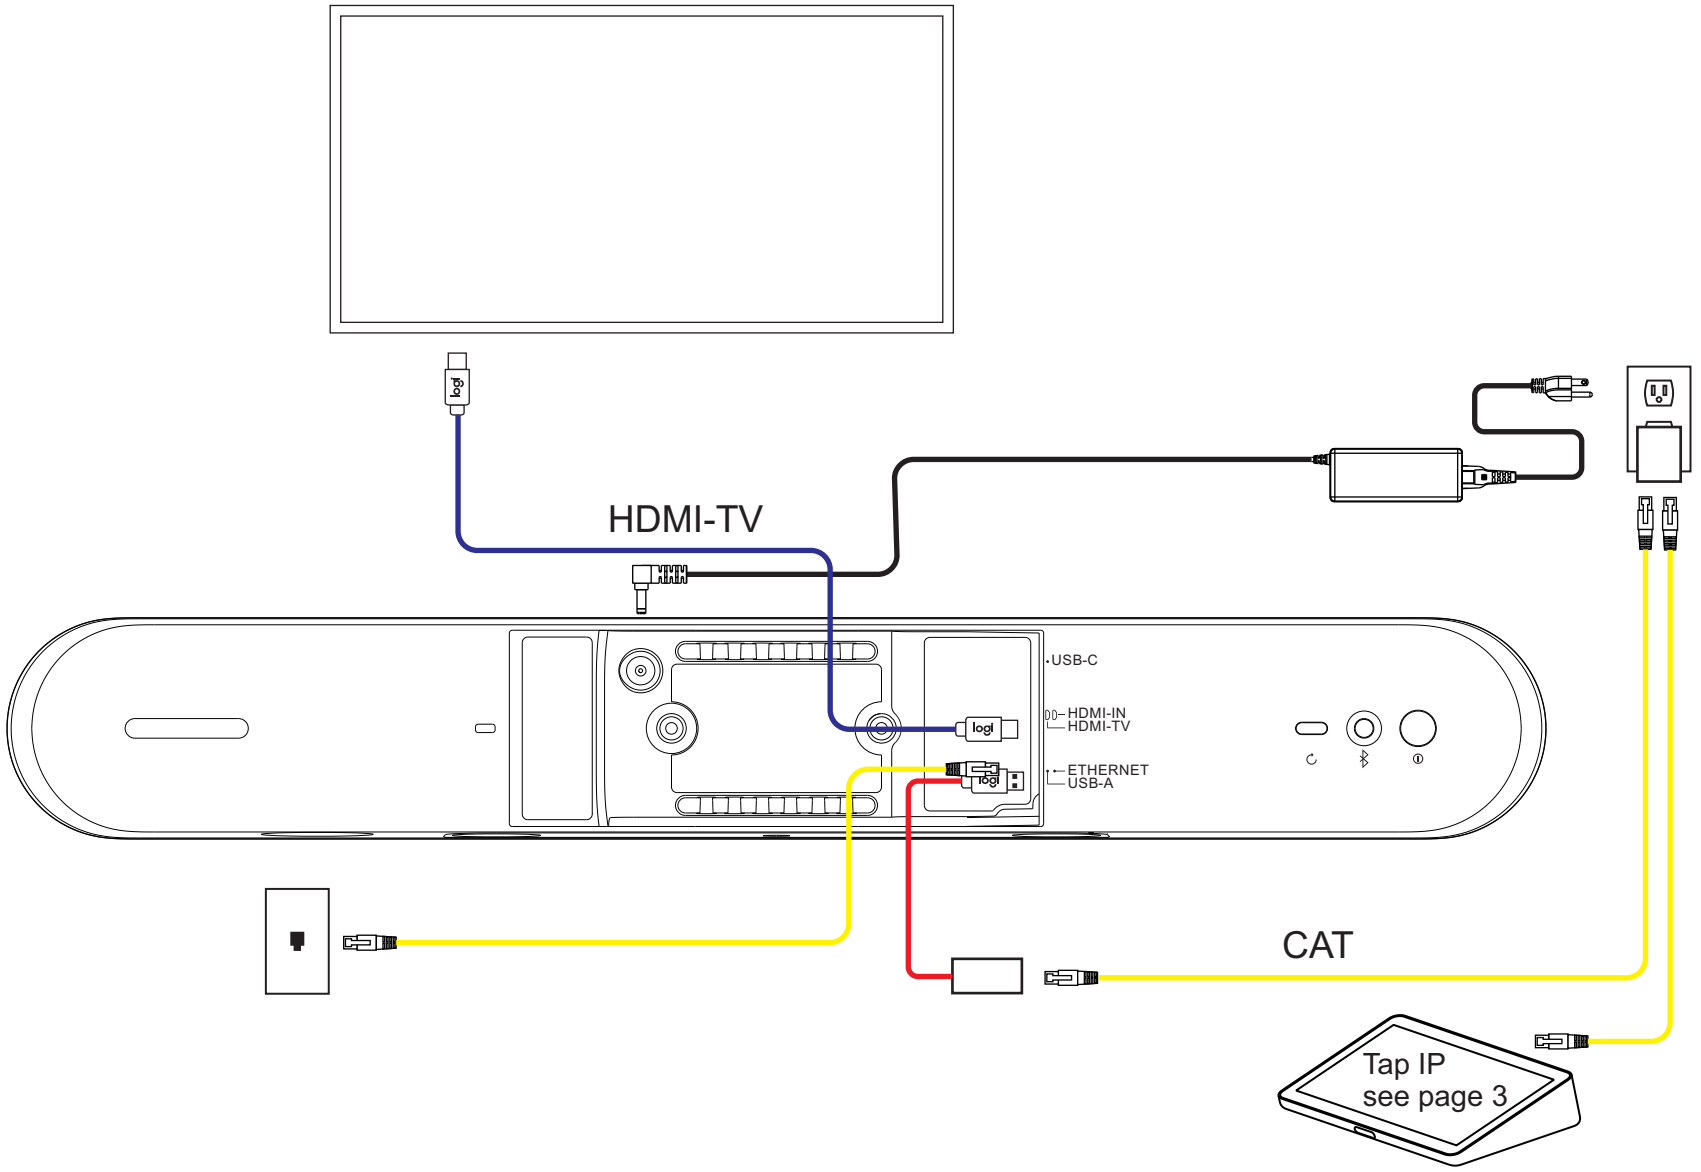

CAT
USB
HDMI

Rally Bar Huddle
Appliance Mode: Default configuration

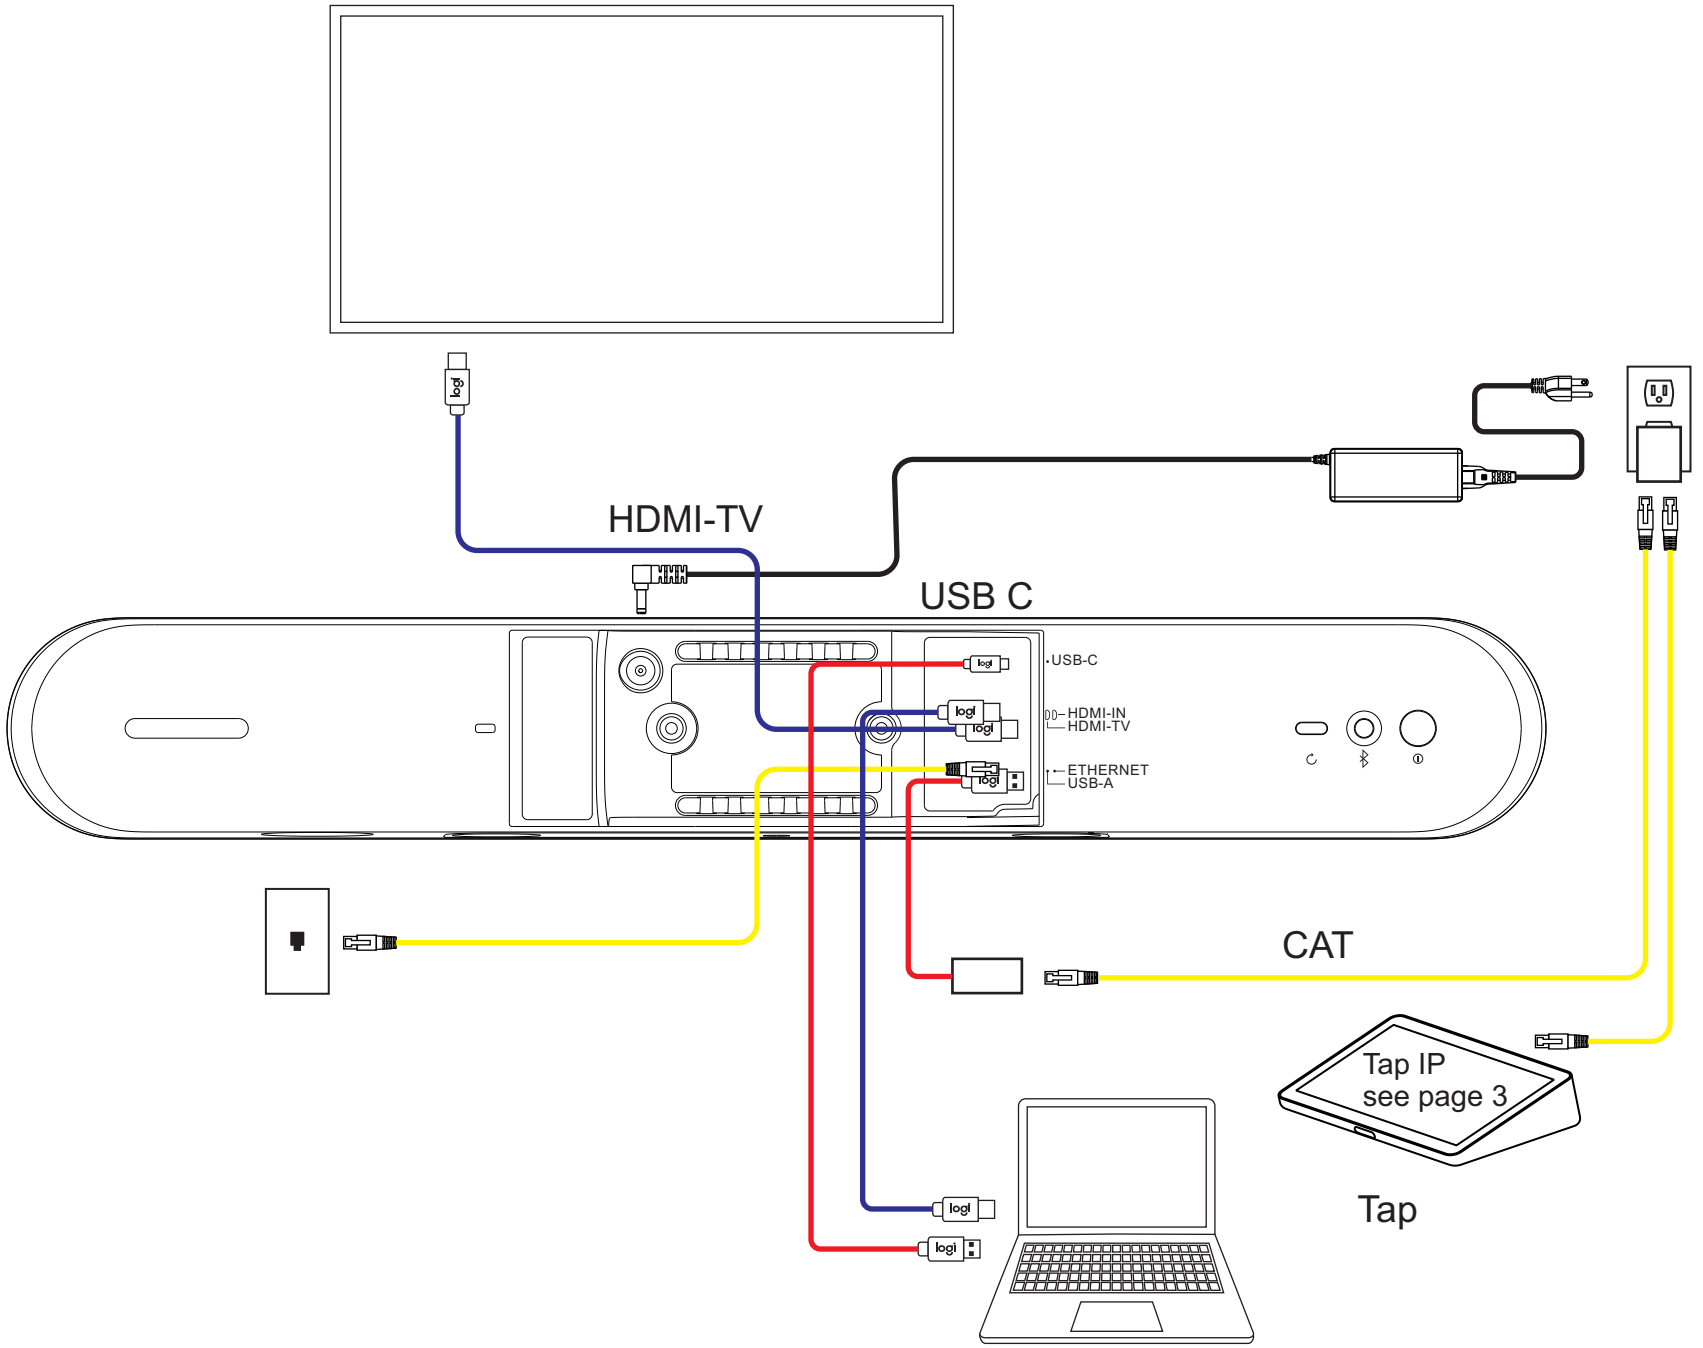


CAT
USB
HDMI

Rally Bar Huddle
Appliance Mode: Temporary switch to USB mode

72

RALLY BAR HUDDLE IN BYOD MODE

Table of Contents

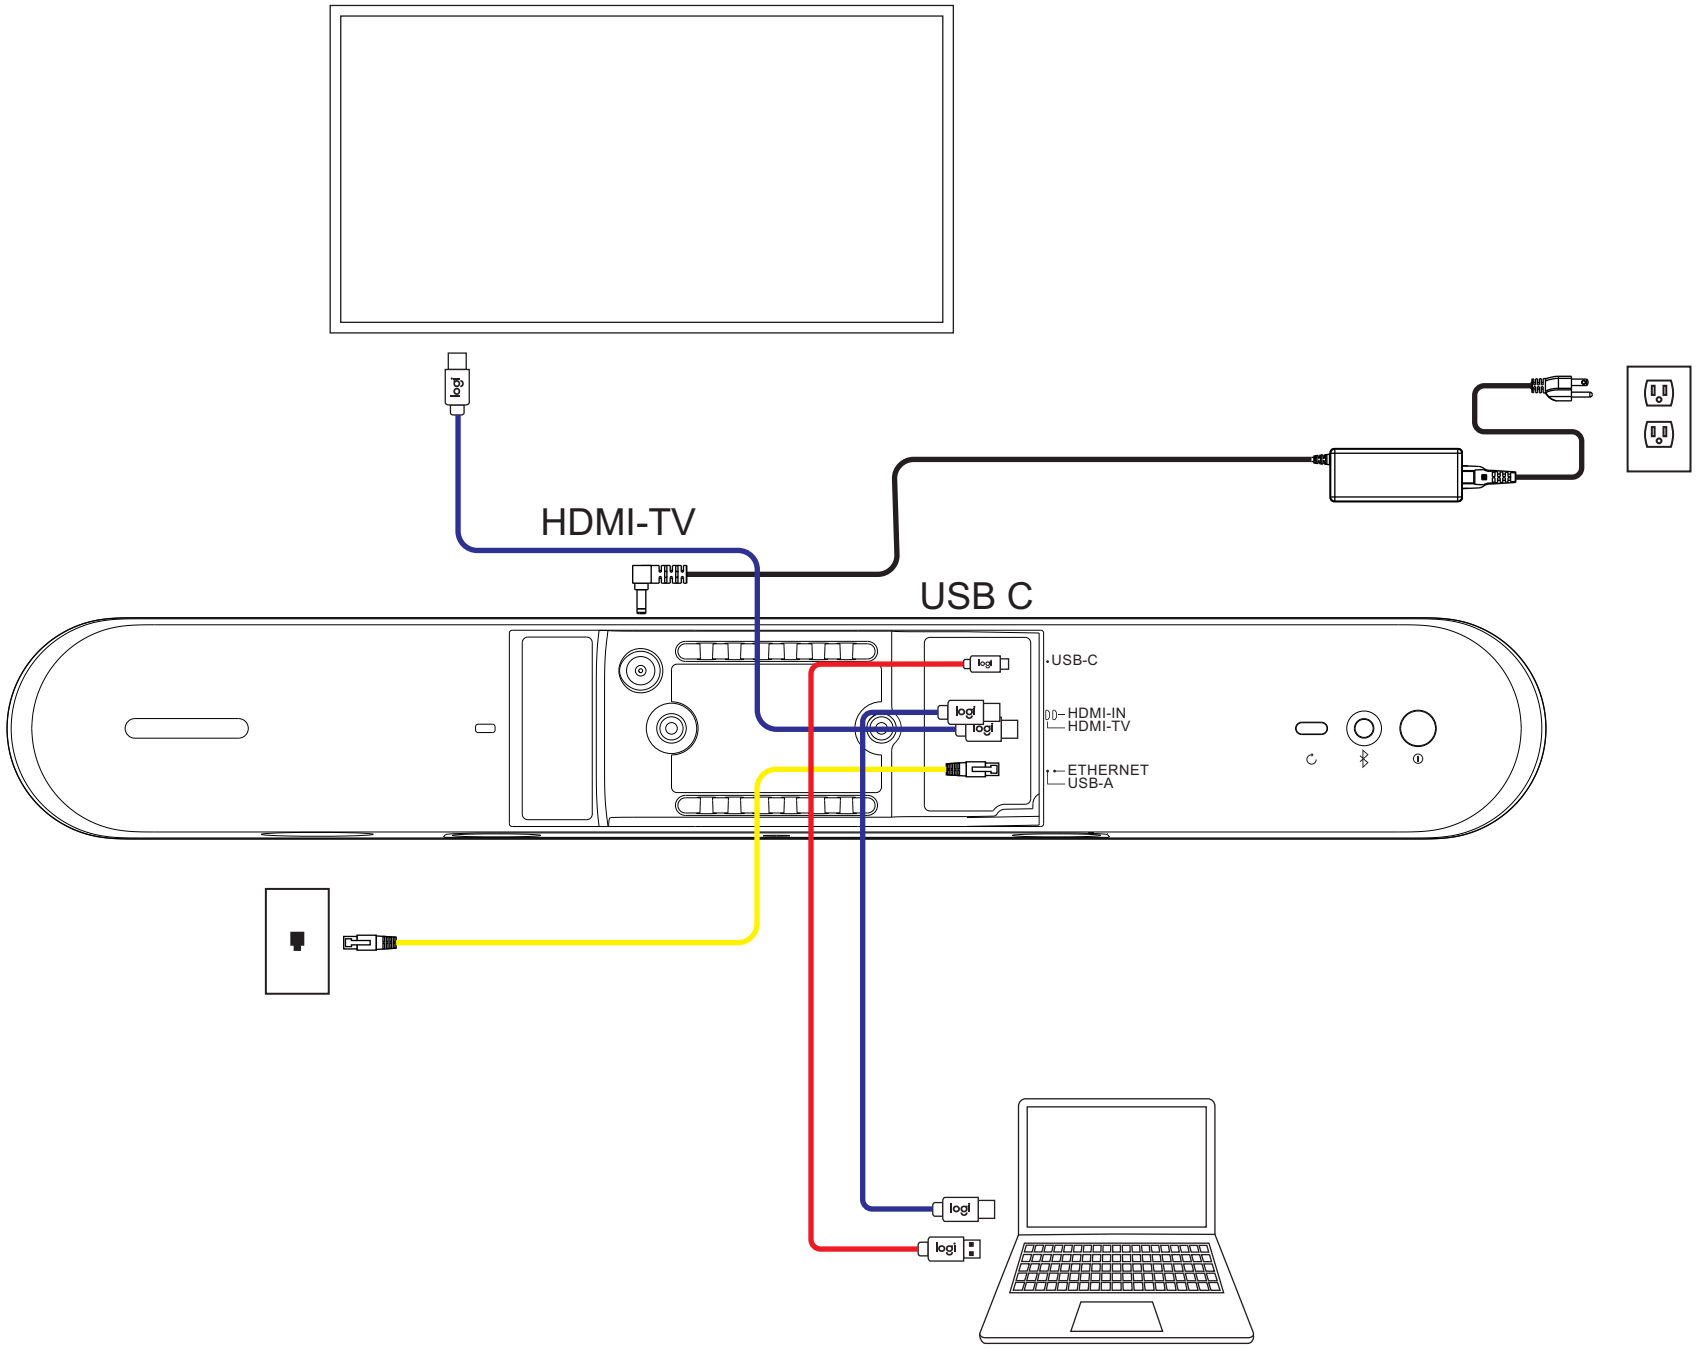


CAT
USB
HDMI

Rally Bar Huddle
BYOD Mode: Default configuration

RALLY BAR HUDDLE IN USB MODE

Table of Contents

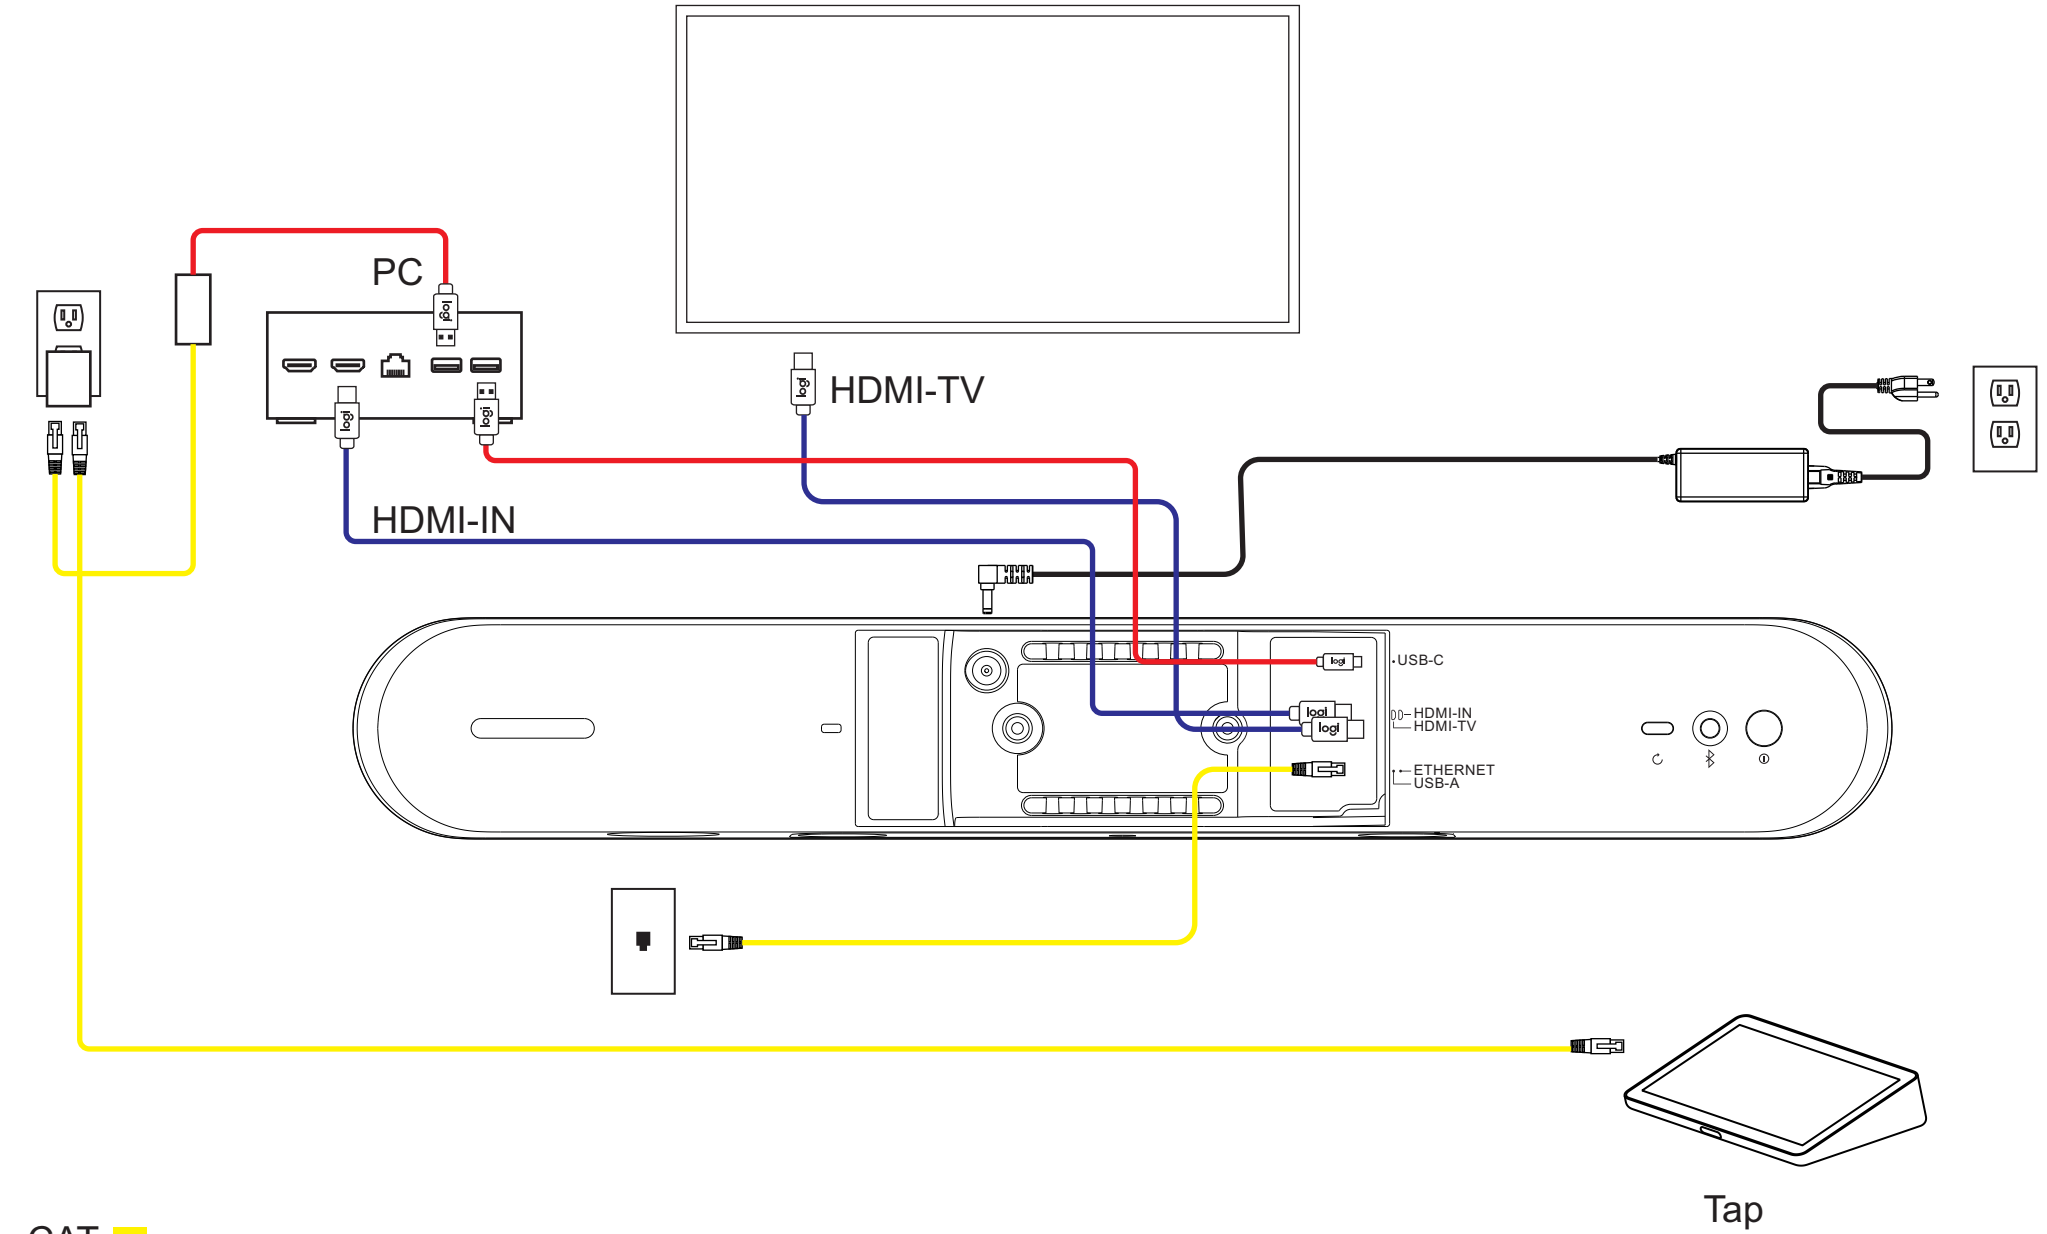

CAT
USB
HDMI

Rally Bar Huddle
USB Mode: Default configuration

Please see prosupport.logi.com for more information