
Delock 2.5” Converter SATA 22 pin > 1 x M.2 key B + 1 x mSATA - 9.5 mm

Description

This converter by Delock enables the connection of an M.2 SATA SSD in 2280, 2260, 2242 and 2230 format or an mSATA module in half size or full size format. If both slots are occupied, only the M.2 SSD can be used. The converter can be installed into the system through the SATA 22 pin interface.

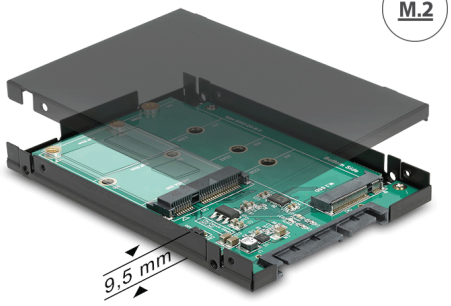

Item no. 62866

EAN: 4043619628667

Country of origin: Taiwan, Republic of China

Package: Retail Box

Specification

- Connectors:
  1 x SATA 6 Gb/s 22 pin plug >
  1 x 67 pin M.2 key B slot
  1 x mSATA slot (half size / full size)
- Interface: SATA
- Form factor: 2.5″
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.35 mm, application of double-sided assembled modules supported
- LED indicator
- Maximum power for modules: 3 A
- Short circuit protection, over heating protection
- ESD protection up to 2 kV
- Dimensions (LxWxH): ca. 100 x 70 x 9.5 mm

System requirements


© 2023 by Delock. All names and symbols mentioned here are property of the respective producer.
Printing errors, changes and errors excepted.

- Linux Kernel 3.20 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64/11
- A free SATA 22 pin interface

Package content

- Converter with 2.5″ enclosure
- Mounting material
- User manual

Images

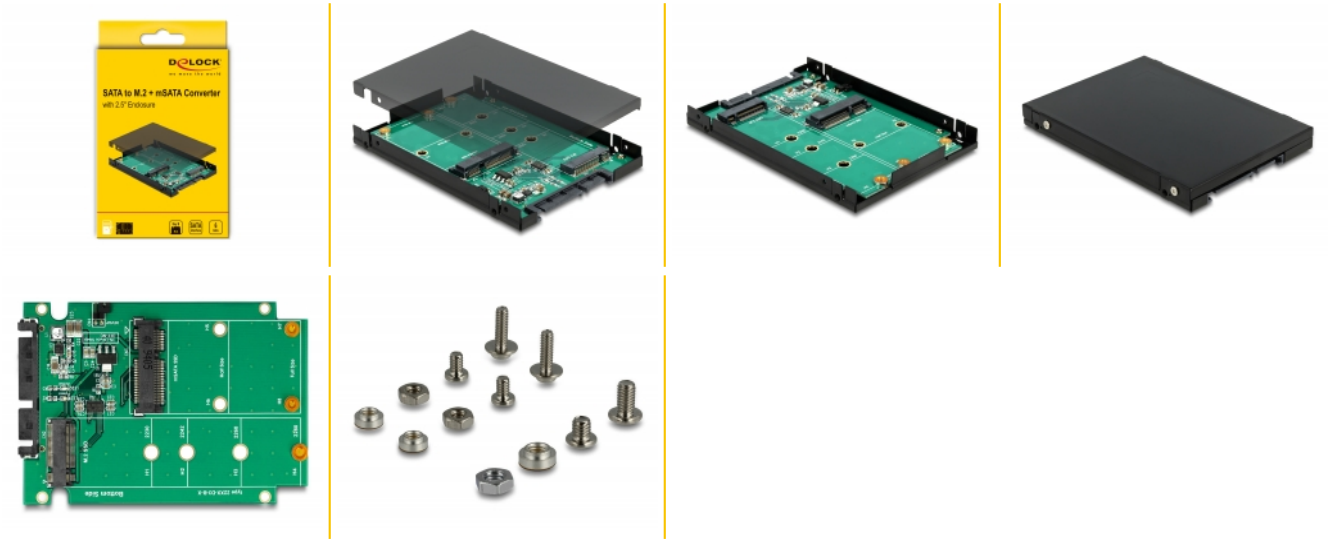

© 2023 by Delock. All names and symbols mentioned here are property of the respective producer.
Printing errors, changes and errors excepted.

General

Form factor:	2.5"
Supported operating system:	Linux Kernel 3.2 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
Slot:	SATA
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.35 mm application of double-sided assembled modules supported
Protection:	ESD (Electrostatic Discharge) Short circuit protection Overheating protection

Interface

Connector 1:	1 x SATA 6 Gb/s 22 pin plug
Connector 2:	1 x 67 pin M.2 key B slot
connector 3:	1 x mSATA slot (half size / full size)

Physical characteristics

Length:	100 mm

© 2023 by Delock. All names and symbols mentioned here are property of the respective producer.
Printing errors, changes and errors excepted.