
Features

- mini DisplayPort 1.1 / DVI for resolutions up to WUXGA / 1920x1200
- Gold plated precision contacts, unidirectional
- mini DisplayPort male to DVI-D Single Link (24+1) female
- High purity copper conductors and triple shielding
- Portsaver for a narrow bending radius and strain relief of device ports




Adapter

Housing Material	ABS Plastic
Contact Material	Gold-plated
Directionality	Unidirectional from mini DisplayPort Source to DVI Display, Active Signal Conversion
Connector 1	mini DisplayPort Male
Dimensions Connector 1	ca. 17.6 x 10.95 x 8 mm
Connector 2	DVI-D (24+1) Single Link Female
Dimensions Connector 2	ca. 45 x 43 x 14.5 mm

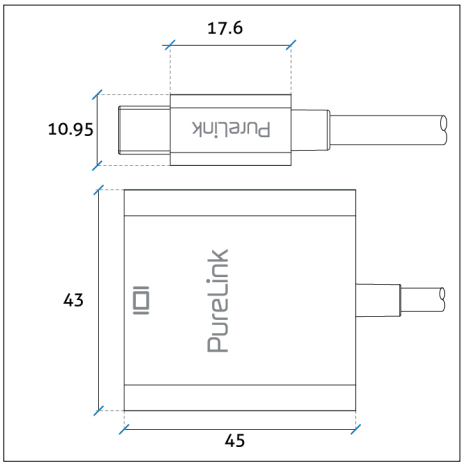

Cable

Type	Round Cable
Construction	5x Twisted Pairs 34AWG + 5x Single Conductors 32AWG + Drain
Shielding	Triple Shielded
Inner Conductor Material	Tinned Stranded Copper
Jacket Outer Material	PVC
Cable Length	0.10m Portsaver Pigtail
Cable Outer Diameter	4.5mm
Minimum Bend Radius	31.5mm
Tensile Strength	1.05 kgf / mm²
Dielectric Strength	AC 500V / 1 Minute
Sheath Printing	Cable Standards, Max. Temperature, Combustion Class

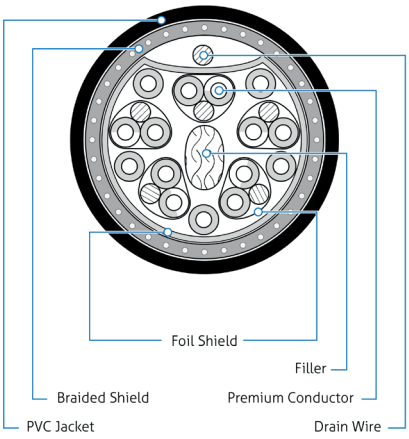

Signal Transmission

Standard	DisplayPort 1.1, HBR 2 | DVI-D Single Link with 18+1 Pins Connected
Bandwidth / Max. Resolution	4.95 Gbps / 2K WUXGA 1920x1200

General

Operation Temperature	Up to 80°C
Colour	White / Black
Packaging	Giftbox, PAP21
Certification / Compliance	CE, ROHS, REACH, WEEE, VW-1

IS150 / IS151 Overview

Art. No.	Length	Colour	EAN
IS150	0.10m	white	4251364709320
IS151	0.10m	black	4251364728383

PureLink GmbH | Von-Liebig-Str. 10 | 48432 Rheine | Germany | 05971 800 299-0 | 05971 800 299-99 | info@purelink.de

We regularly expand our product range. We will be happy to provide information on updates in this regard upon request.
All information is subject to confirmation and non-binding. Technical changes, printing errors and mistakes excepted.
The illustrations used in these document may differ from the delivered product.