
Delock PCI Express Card to 1 x Serial RS-232

Description

The PCI Express card by Delock expands a PC by one external serial port. Different devices such as scanner, protocol converter, IoT devices etc. can be connected to this card.

Low Profile Form Factor
By using the included low profile bracket, the PCI Express card can be also installed into a Mini-PC.

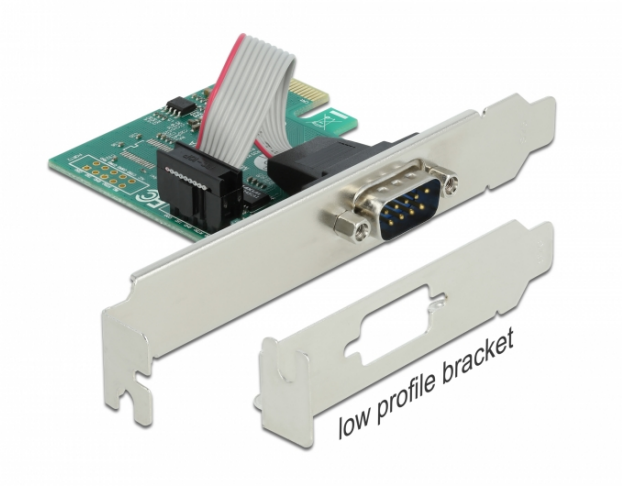

Specification

- Connectors:
  external: 1 x serial RS-232 DB9 male
  internal: 1 x PCI Express x1, V2.0
- Chipset: ASIX AX99100
- Compatible with 16C950 UART
- Supports Active State Power Management (ASPM)
- Supports Direct Memory Access (DMA)
- Data transfer rate up to 921.6 Kbps
- FIFO: 256 byte
- Databits: 5, 6, 7, 8, 9
- Stop bits: 1, 1.5, 2
- Parity: even, odd, none, mark, space
- Flow control: none, hardware RTS / CTS, software XON / XOFF
- Operating temperature: 0 °C ~ 70 °C

System requirements

- Linux Kernel 2.6.24 or above
- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express slot

Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

Item no. 90006

EAN: 4043619900060

Country of origin: China

Package:

Images









General	
Form factor:	Low Profile
Specification:	PCI Express 2.0
Supported operating system:	Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
Slot:	PCIe
Interface	
External:	1 x serial RS-232 DB9 male
Internal:	1 x PCI Express x1, V2.0
Technical characteristics	
Chipset:	ASIX AX99100
Data transfer rate:	75, 110, 134, 150, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 14400, 19200, 38400, 57600, 115200, 230400, 460800, 921600
FIFO:	1 x 256 Byte
UART:	16C950
Physical characteristics	
Slot bracket:	low profile standard
Colour:	green