
PCI Express x16 Card to 4 x internal NVMe M.2 Key M - Bifurcation

Description

This PCI Express card by Delock expands the PC by four M.2 slots. M.2 SSDs in format 2280, 2260, 2242 and 2230 can be connected. The card requires the PCIe bifurcation of the motherboard to split the PCIe signal in order to use multiple slots with M.2 SSDs.

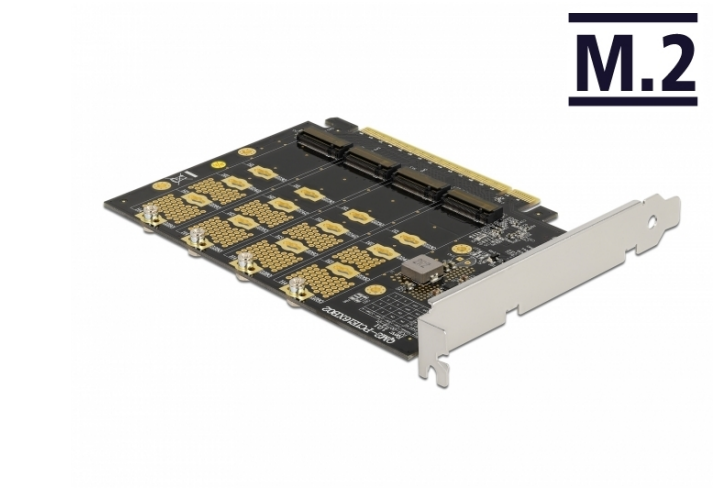

Note

Without PCIe bifurcation only the first M.2 slot of the card can be used.

Specification

- IOI item number: QM2-PCIE16XB02
- Connectors:
  internal:
  4 x 67 pin M.2 key M slot
  1 x PCI Express x16, V4.0
- Interface: PCIe
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports NVM Express (NVMe)
- 4 x LED indicator

System requirements

- Linux Kernel 3.17 or above
- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express x16 / x32 slot
- Motherboard and BIOS with PCIe bifurcation support

Package content

- PCI Express card

Item no. 89017

EAN: 4043619890170


Country of origin: Taiwan, Republic of China

Package: Box

Images







© 2021 by Delock. All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.

General	
Function:	NVM Express (NVMe)
Supported operating system:	Linux Kernel 3.17 or above Windows 10 32-bit Windows 10 64-bit Windows 8.1 32-bit Windows 8.1 64-bit
LED indicator:	4 x
Slot:	PCIe
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported
Interface	
Internal:	4 x 67 pin M.2 key M slot 1 x PCI Express x16, V4.0

© 2021 by Delock. All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.