








Package copper foil 360 ° ring welding

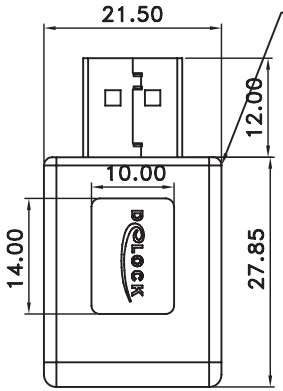


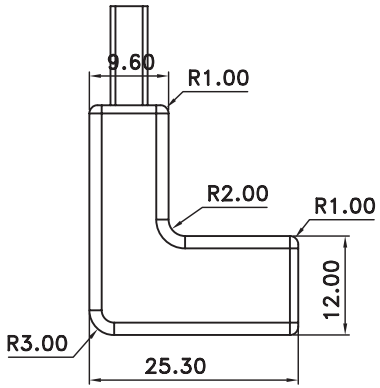









CE FC UL RoHS 2.0

REACH SVHC176

ELECTRICAL PROPERTIES:

1. 100% OPEN SHORT MIS-WIRE TEST
2. Contact Resistance:10ohm
3. Insulation Resistance:5Mega ohm
4. Hipot test:300V/10ms.

PIN ASSIGNMENT

	USB3.0 AM	USB3.0AF	COLOR
28AWG	1	1	RED
28AWG	2	2	WHITE
28AWG	3	3	GREEN
28AWG	4	4	BLACK
28AWG	5	5	YELLOW
28AWG	6	6	BLUE
28AWG	7	7	DRAIN
28AWG	8	8	ORANGE
28AWG	9	9	PURPLE
28AWG	SHELL	SHELL	BRAID

	DESCRIPTION	Q'TY	UNIT
4	45P PVC MOLDING BLACK IN COLOR	1	pcs
3	USB3.0 A TYPE FEMALE SHELL PLATED:NICKEL CONTACT:G/F BLUE	1	pcs
2	USB3.0 A TYPE MALE SHELL PLATED:NICKEL CONTACT:G/F BLUE	1	pcs
1	INTERNAL WIRES;UL1007 28AWG 7STRAND	10	pcs

DELOCK
we move the world

Title: Adapter USB 3.0 Type-A male > Type-A female angled 90° vertical

Date	2020 / 07 / 28	Item no.	65339
Unit	mm	Barcode	4043619653393
Projection		File No.	88366
Rev	A		