AT-LP2X

Fully Automatic Belt-Drive Turntable


The AT-LP2X combines hi-fi features in a stylish design to deliver stunning sonic quality at a great price.



It is perfect if you're looking for an automatic turntable that will grow with your needs as you build out the perfect home stereo system. It boasts ease-of-use, performance, affordability and options to add-on or upgrade the turntable's key features.

The AT-LP2X is a fully automatic belt-drive turntable with switchable controls to play 12" and 7" vinyl records at one of two speeds—33⅓ and 45 RPM. Being fully automatic, starting and stopping your records is done simply by pressing the START and STOP buttons on the front of the player. With these controls, you won't need to manually lift the needle to play your favorite music—the buttons will automatically lift and place the tonearm. Should you wish to do it manually, however, a hydraulically-damped lift control allows the stylus to be precisely and safely lowered and raised at any point on the record.

The AT-LP2X's balanced straight tone arm comes with a ½" mount universal headshell and Audio-Technica's AT91R Dual Moving Magnet phono cartridge with the option to switch it out for other moving magnet or moving coil cartridges. This is all to give you an excellent, high-fidelity listening experience and the flexibility to upgrade. It has an anti-resonance, die-cast aluminum platter with a felt mat; boasts a damped base construction for reduced low-frequency feedback; and includes a 45 RPM adapter and hinged, clear-smoked, dust cover.

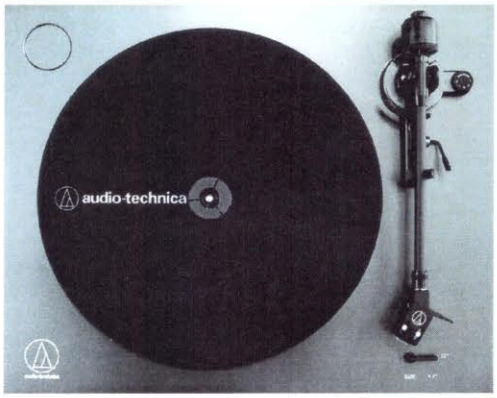

On the back of AT-LP2X is a PHONO/LINE switch; an attached dual-RCA output cable; and an AC input to connect the included power cable. Depending on your setup, switch the PHONO/LINE selector to PHONO when you are using the AT-LP2X with an amplifier with a dedicated PHONO input. Or switch to LINE, which will turn on the internal preamp, when you are using a LINE or AUX input on your amplifier, or connected directly to powered speakers.

Product Highlights

- Fully-automatic belt-drive turntable.
- Two speeds: 33⅓, 45 RPM.
- Balanced straight tone arm with hydraulically damped lift control and tone armrest.
- Attached dual-RCA output cable.
- ½" mount universal BLACK headshell.
- AT91R Dual Moving Magnet RED phono cartridge and long-life diamond stylus.
- Anti-resonance, die-cast aluminum platter with felt mat.
- Damped base construction for reduced low-frequency feedback coloration.
- Includes 45 RPM adapter and removable hinged smoked dust cover.



Specifications

Turntable

Drive Method	Belt-Drive
Type	Fully Automatic
Motor	DC servo-controlled
Speeds	33⅓ RPM, 45 RPM
Turntable Platter	Die-cast aluminium
Wow and Flutter	Less than 0.25% (WTD) @ 3kHz (JIS)
Signal-to-Noise Ratio	>50dB (DIN-B)
Output Level	Pre-amp "PHONO": 1.5-3.6mV nominal at 1kHz, 5cm/sec
Phono Pre-Amp Gain	36dB nominal, RIAA equalized
Power Supply Requirements	120V AC, 60 Hz
Dimensions	17.1" W x 5.0" H x 13.8" D
Weight	11.5 lbs
Accessories Included	AT91R Dual Moving Magnet RED stereo cartridge with a replaceable stylus; ½" mount universal headshell; power cord; 45 RPM adapter; removable hinged dust cover; 4mm felt

Specifications are subject to change without notice.

audio-technica